


Voltage Mains Test EN55022 B

EUT: M/N:VOIP45W
 Manufacturer: OWLINK
 Operating Condition: FULL LOAD
 Test Site: 3# SHIELDED ROOM
 Operator: Tracy
 Test Specification: AC 110V/50Hz
 Comment: #2
 Start of Test: 7/21/2005 / 2:04:48PM

SCAN TABLE: "Voltage (9K-30M)FIN"
 Short Description: 150K-30M Voltage

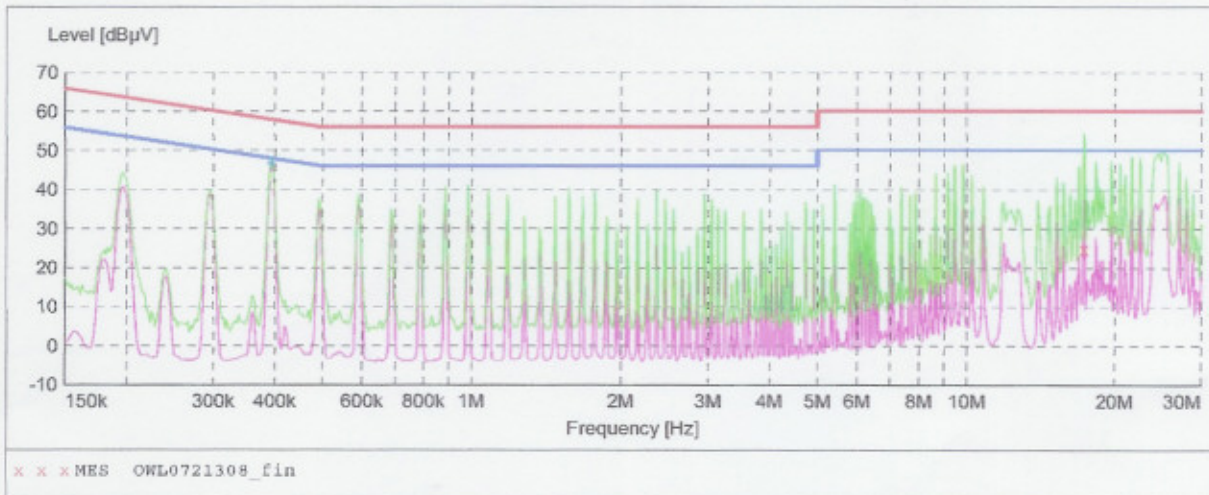

MEASUREMENT RESULT: "OWL0721308_fin"

7/21/2005 2:06PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
17.320817	24.70	10.9	60	35.3	QP	N	GND

MEASUREMENT RESULT: "OWL0721308_fin2"

7/21/2005 2:06PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.393382	46.60	10.4	48	1.4	AV	N	GND

加 40 4410.5 40m $\frac{1}{\pi}$ $\frac{1}{\pi}$ 改为 102 ✓

Voltage Mains Test EN55022 B

EUT: M/N:VOIP45W
 Manufacturer: OWLINK
 Operating Condition: FULL LOAD
 Test Site: 3# SHIELDED ROOM
 Operator: Tracy
 Test Specification: AC 220V/50Hz
 Comment: #2
 Start of Test: 7/21/2005 / 2:07:21PM

SCAN TABLE: "Voltage (9K-30M)FIN"
 Short Description: 150K-30M Voltage

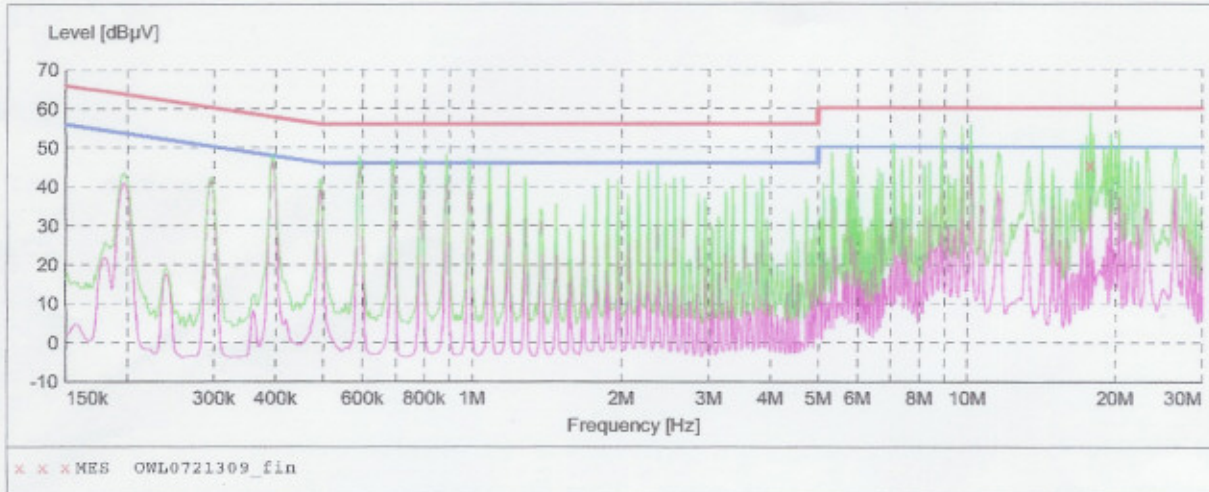

MEASUREMENT RESULT: "OWL0721309_fin"

7/21/2005 2:09PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
17.739842	45.40	10.9	60	14.6	QP	N	GND

MEASUREMENT RESULT: "OWL0721309_fin2"

7/21/2005 2:09PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
9.759103	49.60	10.7	50	0.4	AV	N	GND

100000.5 40mH

