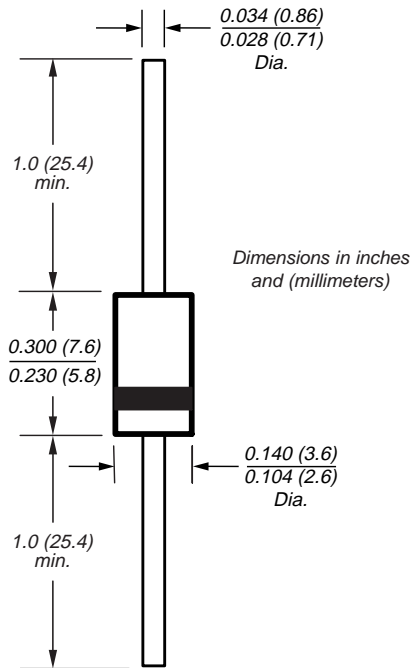
**Ultrafast Plastic Rectifier****DO-204AC (DO-15)****Reverse Voltage** 200V  
**Forward Current** 1.0A  
**Reverse Recovery Time** 25ns**Features**

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as a free wheeling diode
- Ultrafast recovery time for high efficiency
- Excellent high temperature switching
- Glass passivated junction

**Mechanical Data****Case:** JEDEC DO-204AC, molded plastic body over passivated chip**Terminals:** Axial leads, solderable per MIL-STD-750, Method 2026High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension**Polarity:** Color band denotes cathode end**Mounting Position:** Any**Weight:** 0.015 oz., 0.4 g**Maximum Ratings & Thermal Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	MUR120	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	200	V
Working peak reverse voltage	$V_{RWM}$	200	V
Maximum DC blocking voltage	$V_{DC}$	200	V
Maximum average forward rectified current at $T_A = 130^\circ\text{C}$	$I_{F(AV)}$	1.0	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	35	A
Typical Thermal Resistance Junction to Ambient <sup>(2)</sup>	$R_{\theta JA}$	27	°C/W
Operating and storage temperature range	$T_J, T_{STG}$	-65 to +175	°C

**Electrical Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.


Maximum instantaneous forward voltage <sup>(1)</sup> at	1.0A, $T_J = 25^\circ\text{C}$ 1.0A, $T_J = 150^\circ\text{C}$	$V_F$	0.875 0.710	V
Maximum instantaneous reverse current at rated DC blocking voltage <sup>(1)</sup>	$T_J = 25^\circ\text{C}$ $T_J = 150^\circ\text{C}$	$I_R$	2.0 50	$\mu\text{A}$
Maximum reverse recovery time at $I_F = 0.5\text{A}$ , $I_R = 1.0\text{A}$ , $I_{rr} = 0.25\text{A}$		$t_{rr}$	25	ns
Maximum reverse recovery time at $I_F = 1.0\text{A}$ , $di/dt = 50\text{A}/\mu\text{s}$ , $V_R = 30\text{V}$ , $I_{rr} = 10\% I_{RM}$		$t_{rr}$	35	ns
Maximum forward recovery time at $I_F = 1.0\text{A}$ , $di/dt = 100\text{A}/\mu\text{s}$ , $I_{rec}$ to 1.0V		$t_{fr}$	25	ns

**Notes:** (1) Pulse test:  $t_p = 300\mu\text{s}$ , duty cycle  $\leq 2\%$ 


(2) Lead length = 3/8" on P.C. Board with 1.5" x 1.5" copper surface

**Ratings and Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)


**Fig. 1 – Forward Current Derating Curve**

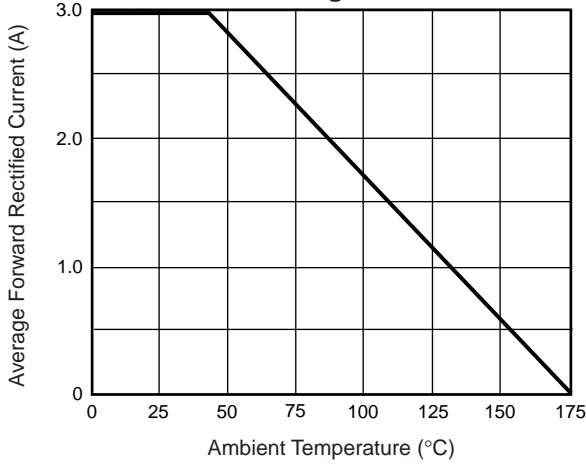


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current**

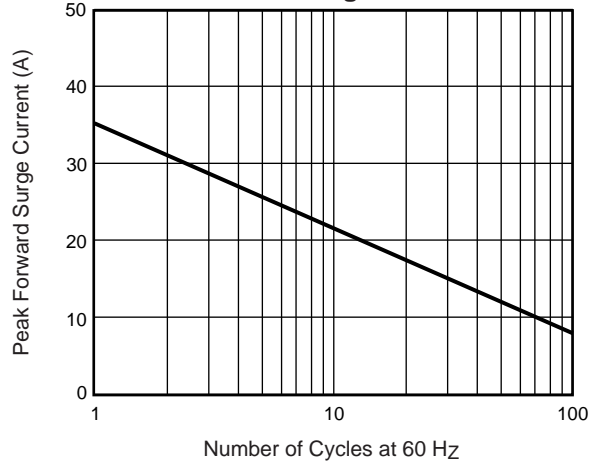

**Fig. 3 – Typical Instantaneous Forward Characteristics**

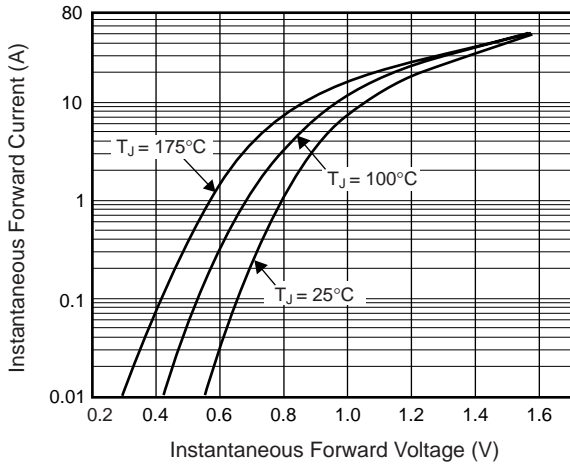

**Fig. 4 – Typical Reverse Leakage Characteristics**

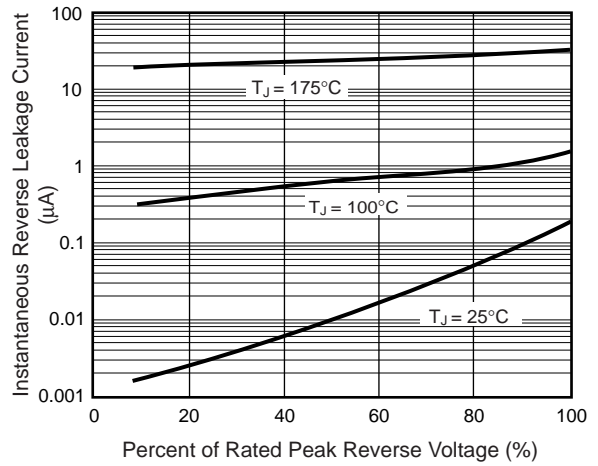

**Fig. 5 – Typical Junction Capacitance**

