

RICOH**Li-LON/POLYMER 2-CELL PROTECTOR****R5460xxxxxx SERIES****OUTLINE**

The R5460xxxxxx Series are high voltage CMOS-based protection ICs for over-charge/discharge of rechargeable two-cell Lithium-ion (Li+) / Lithium polymer, further include a short circuit protection circuit for preventing large external short circuit current and the protection circuits against the excess discharge-current and excess charge current.

Each of these ICs is composed of six voltage detectors, a reference unit, a delay circuit, a short circuit protector, an oscillator, a counter, and a logic circuit. When the over-charge voltage threshold or excess-charge current threshold crosses the each detector threshold from a low value to a high value, the output of C_{OUT} pin switches to "L" level after internal fixed delay time. To release over-charge detector after detecting over-charge, the detector can be reset and the output of C_{OUT} becomes "H" when a kind of load is connected to V_{DD} after a charger is disconnected from the battery pack and the cell voltage becomes lower than over-charge detector threshold. In case that a charger is continuously connected to the battery pack, if the cell voltage becomes lower than the over-charge detector threshold, over-charge state is also released.

The output of D_{OUT} pin, the output of the over-discharge detector and the excess discharge-current detector, switches to "L" level after internally fixed delay time, when discharged voltage crosses the detector threshold from a high value to a value lower than V_{DET2}.

To release over-discharge detector, after detecting over-discharge voltage, connect a charger to the battery pack, and when the battery supply voltage becomes higher than over-discharge detector threshold. In case of "A" version, when the cell voltage becomes equal or more than the released voltage from over-discharge, over-discharge detector is released.

Even if a battery is discharged to 0V, charge current is acceptable.

After detecting excess-discharge current or short current, when the load is disconnected, the excess discharged or short condition is released and D_{OUT} becomes "H".

After detecting over-discharge voltage, supply current will be kept extremely low by halting internal circuits' operation.

When the output of C_{OUT} is "H", if V₋ pin level is set at -1.6V, the delay time of detector can be shortened. Especially, the delay time of the over-charge detector can be reduced into approximately 1/60 and test time for protection circuit PCB can be reduced. The output type of C_{OUT} and D_{OUT} is CMOS.

RICOH

FEATURES


- Manufactured with High Voltage Tolerant Process ... Absolute Maximum Rating 30V
- Low supply current Supply current (At normal mode) Typ. 4.0μA
 - Standby current Typ. 1.2μA (A version)
 - Max. 0.1μA (B version)
- High accuracy detector threshold Over-charge detector (Topt=25°C) ±25mV
 - (Topt=-5 to 55°C) ±30mV
 - Over-discharge detector ±2.5%
 - Excess discharge-current detector ±15mV
 - Excess charge-current detector -0.1V ±30mV
 - 0.2V ± 30mV
 - 0.4V ± 40mV
- Variety of detector threshold Over-charge detector threshold 4.1V-4.5V step of 0.005V(VD1U/VD1L)
 - Over-discharge detector threshold 2.0V-3.0V step of 0.005V(VD2U/VD2L)
 - Excess discharge-current threshold 0.05V-0.20V step of 0.005V
 - Excess charge-current threshold -0.1V/-0.2V/-0.4V
 - Over-charge released voltage 0.1V-0.4V step of 0.05V(VH1U/VH1L)
 - Over-discharge released voltage 0.1V-0.7V step of 0.1V(VH2U/VH2L)
- Internal fixed Output delay time Over-charge detector Output Delay 1.0s
 - Over-discharge detector Output Delay 128ms
 - Excess discharge-current detector Output Delay 12ms
 - Excess charge-current detector Output Delay 8ms
 - Short Circuit detector Output Delay 300μs
- Output Delay Time Shortening Function.. At COUT is "H", if V- level is set at -1.6V, the Output Delay time of detect and release the over-charge and over-discharge can be reduced. (Delay Time for over-charge becomes about 1/60 of normal state.)
- 0V-battery charge acceptable
- Ultra Small package SOT-23-6, PLP1820-6

APPLICATIONS


- Li+ / Li Polymer protector of over-charge, over-discharge, excess-current for battery pack
- High precision protectors for cell-phones and any other gadgets using on board Li+ / Li Polymer battery

BLOCK DIAGRAMS

A version

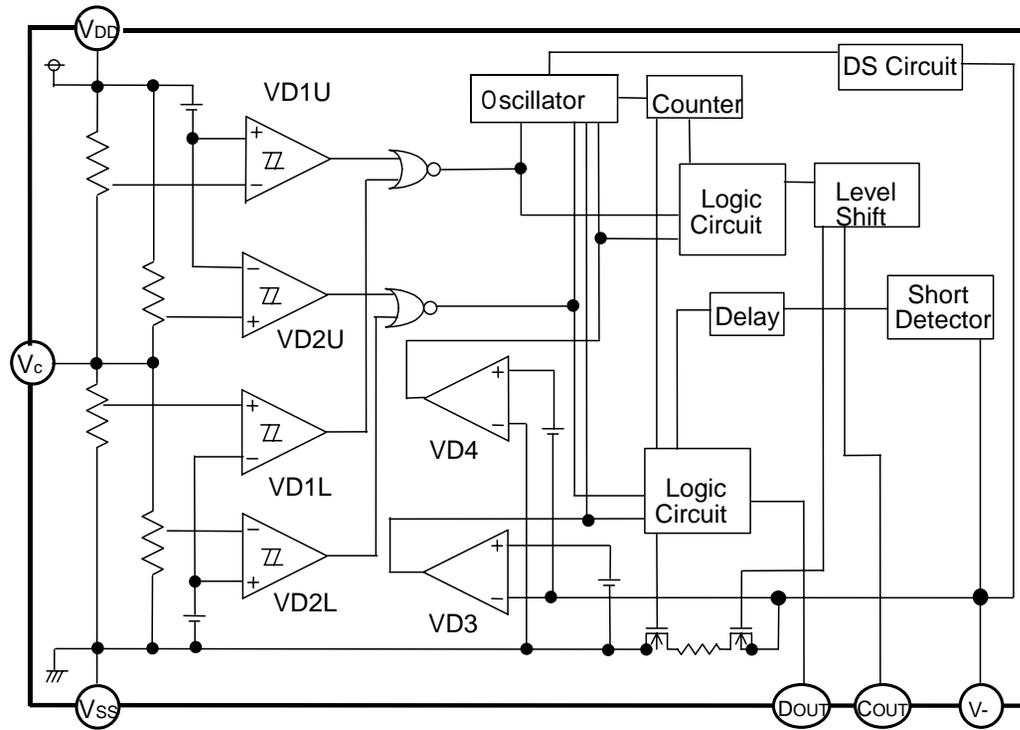

B version

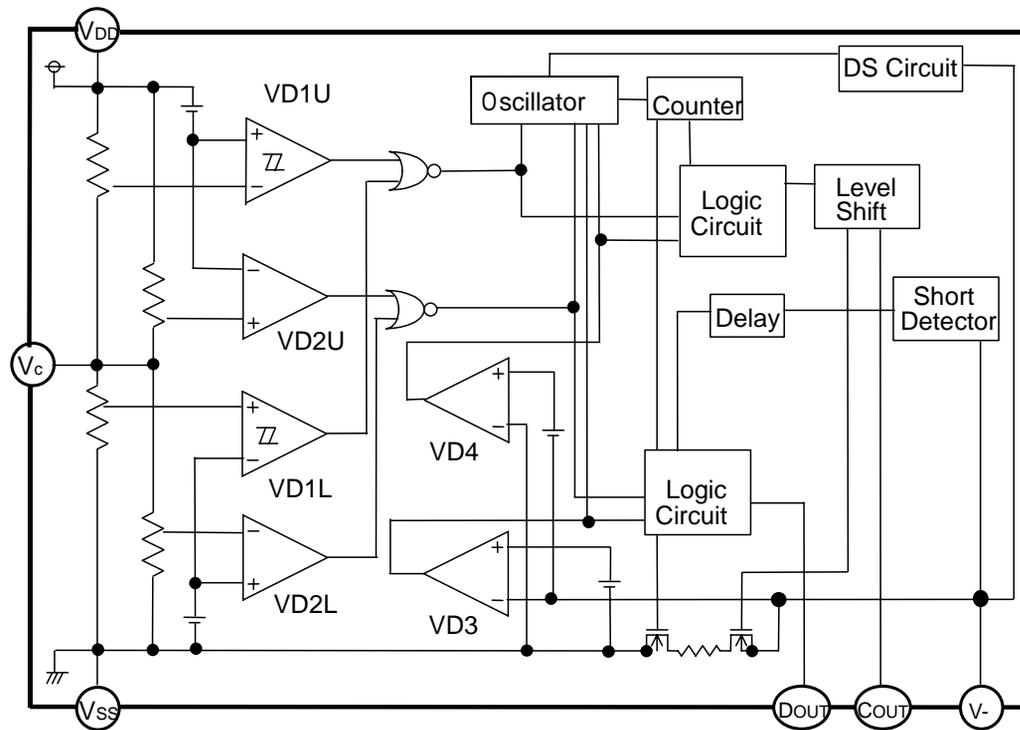

SELECTION GUIDE


In the R5460xxxxxx Series, input threshold of over-charge, over-discharge, excess discharge current, and the package and taping can be designated.

Part Number is designated as follows:

R5460x xxxxx-xx ←Part Number
↑ ↑ ↑↑ ↑
a b cd e

Code	Contents
a	Package Type N: SOT-23-6 K: PLP1820-6
b	Serial Number for the R5460 Series designating input threshold for over-charge, over-discharge, excess discharge-current detectors.
c	Designation of Output delay option of over-charge and excess discharge-current.
d	Designation of version symbols.
e	Taping Type: TR (refer to Taping Specification)

PIN CONFIGURATIONS

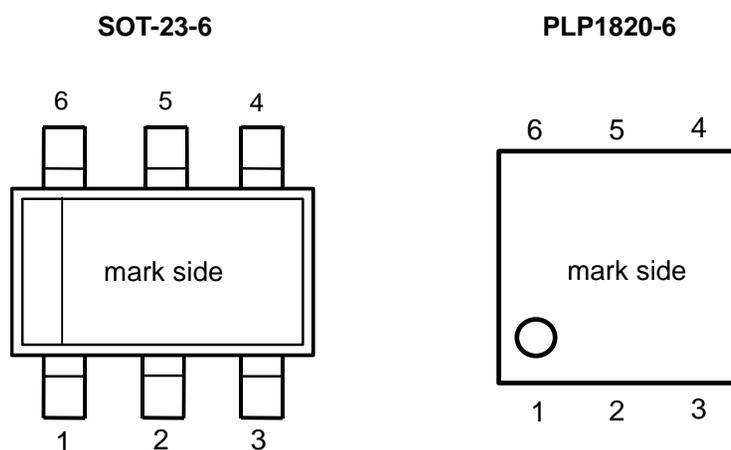

PIN DESCRIPTION

Pin No.		Symbol	Description
SOT23-6	PLP1820-6		
1	3	D _{OUT}	Output pin of over-discharge detection, CMOS output
2	1	C _{OUT}	Output pin of over-charge detection, CMOS output
3	2	V-	Pin for charger negative input
4	6	VC	Input Pin of the center voltage between two-cell
5	5	V _{DD}	Power supply pin, the substrate voltage level of the IC.
6	4	V _{SS}	V _{SS} pin. Ground pin for the IC

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Ratings	Unit
V _{DD}	Supply voltage	-0.3 to 12	V
V _C	Input Voltage		
	Center pin voltage between two-cell	V _{SS} -0.3 to V _{DD} +0.3	V
V-	Charger negative input V- pin	V _{DD} -30 to V _{DD} +0.3	
	Output voltage		
V _{COUT}	C _{OUT} pin	V _{DD} -30 to V _{DD} +0.3	V
V _{DOUT}	D _{OUT} pin	V _{SS} -0.3 to V _{DD} +0.3	V
P _D	Power dissipation	150	mW
T _{opt}	Operating temperature range	-40 to 85	°C
T _{stg}	Storage temperature range	-55 to 125	°C

*Note: Exposure to the condition exceeded Absolute Maximum Ratings may cause the permanent damages and affects the reliability and safety of both device and systems using the device. The functional operations cannot be guaranteed beyond specified values in the Recommended conditions.

ELECTRICAL CHARACTERISTICS

A version

Unless otherwise specified, T_{opt}=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V _{DD1}	Operating input voltage	Voltage defined as V _{DD} -V _{SS}	1.50		10.0	V
V _{st}	Minimum operating Voltage for 0V charging *Note 1	Voltage defined as V _{DD} -V _{SS} =0V			1.8	V
V _{DET1U}	CELL1 Over-charge threshold	Detect rising edge of supply voltage R1=330Ω R1=330Ω (T _{opt} =-5 to 55°C)*Note3	V _{DET1U} -0.025 V _{DET1U} -0.030	V _{DET1U} V _{DET1U}	V _{DET1U} +0.025 V _{DET1U} +0.030	V V
V _{REL1U}	CELL1 Over-charge released voltage	R1=330Ω	V _{REL1U} -0.05	V _{REL1U}	V _{REL1U} +0.05	V
t _{VDET1}	Output delay of over-charge	V _{DD} =3.5V to 4.5V, V _C -V _{SS} =3.5V	0.7	1.0	1.3	s
t _{VREL1}	Output delay of release from over-charge	V _{DD} =4.5V to 3.5V, V _C -V _{SS} =3.5V	11	16	21	ms
V _{DET1L}	CELL2 Over-charge detector threshold	Detect rising edge of supply voltage R1=330Ω R1=330Ω (T _{opt} =-5 to 55°C)*Note3	V _{DET1L} -0.025 V _{DET1L} -0.030	V _{DET1L} V _{DET1L}	V _{DET1L} +0.025 V _{DET1L} +0.030	V V
V _{REL1L}	CELL2 Over-charge released voltage	R1=330Ω	V _{REL1L} -0.05	V _{REL1L}	V _{REL1L} +0.05	V
V _{DET2U}	CELL1 Over-discharge threshold	Detect falling edge of supply voltage	V _{DET2U} ×0.975	V _{DET2U}	V _{DET2U} ×1.025	V
V _{REL2U}	CELL1 Released Voltage from Over-discharge	Detect rising edge of supply voltage	V _{REL2U} ×0.975	V _{REL2U}	V _{REL2U} ×1.025	V
t _{VDET2}	Output delay of over-discharge	V _{DD} -V _C =3.5V to 2.2V V _C -V _{SS} =3.5V	89	128	167	ms
t _{VREL2}	Output delay of release from over-discharge	V _{DD} -V _C =2.2V to 3.5V V _C -V _{SS} =3.5V	0.7	1.2	1.7	ms
V _{DET2L}	CELL2 Over-discharge threshold	Detect falling edge of supply voltage	V _{DET2L} ×0.975	V _{DET2L}	V _{DET2L} ×1.025	V
V _{REL2L}	CELL2 Released Voltage from Over-discharge	Detect rising edge of supply voltage	V _{REL2L} ×0.975	V _{REL2L}	V _{REL2L} ×1.025	V
V _{DET3}	Excess discharge-current threshold	Detect rising edge of 'V-' pin voltage	V _{DET3} -0.015	V _{DET3}	V _{DET3} +0.015	V
t _{VDET3}	Output delay of excess discharge current	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =0V to 0.5V	8	12	16	ms
t _{VREL3}	Output delay of release from excess discharge-current	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =3V to 0V	0.7	1.2	1.7	ms
V _{DET4}	Excess charge-current threshold	Detect falling edge of 'V-' pin voltage	-0.13 -0.23 -0.44	-0.10 -0.20 -0.40	-0.07 -0.17 -0.36	V V V
t _{VDET4}	Output delay of excess charge-current	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =0V to -1V	5	8	11	ms
t _{VREL4}	Output delay of release from excess charge-current	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =-1V to 0V	0.7	1.2	1.7	ms
V _{short}	Short protection voltage	V _{DD} -V _C =V _C -V _{SS} =3.5V	0.6	1.0	1.4	V
T _{short}	Output Delay of Short protection	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =0V to 2V	230	300	500	μs
R _{short}	Reset resistance for Excess discharge-current protection	V _{DD} =7.2V, V ₋ =1V	25	40	75	kΩ
V _{DS}	Delay Shortening Mode input voltage	V _{DD} -V _C =V _C -V _{SS} =4.4V	-2.2	-1.6	-1.0	V
V _{OL1}	Nch ON voltage of C _{OUT}	I _{ol} =50μA V _{DD} -V _C =V _C -V _{SS} =4.5V		0.4	0.5	V
V _{OH1}	Pch ON voltage of C _{OUT}	I _{oh} =-50μA V _{DD} -V _C =V _C -V _{SS} =3.9V	6.8	7.4		V
V _{OL2}	Nch ON voltage of D _{OUT}	I _{ol} =50μA V _{DD} -V _C =V _C -V _{SS} =2.0V		0.2	0.5	V
V _{OH2}	Pch ON voltage of D _{OUT}	I _{oh} =-50μA, V _{DD} -V _C =V _C -V _{SS} =3.9V	6.8	7.4		V
I _{DD}	Supply current	V _{DD} -V _C =V _C -V _{SS} =3.9V		4.0	8.0	μA
I _S	Standby current	V _{DD} -V _C =V _C -V _{SS} =2V		1.2	2.0	μA

*Note: We compensate for this characteristic related to temperature by laser-trim, however, this specification is guaranteed by design, not production tested.

B version

Unless otherwise specified, T_{opt}=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V _{DD1}	Operating input voltage	Voltage defined as V _{DD} -V _{SS}	1.50		10.0	V
V _{st}	Minimum operating Voltage for 0V charging *Note 1	Voltage defined as V _{DD} -V _{DD} -V _{SS} =0V			1.8	V
V _{DET1U}	CELL1 Over-charge threshold	Detect rising edge of supply voltage R1=330Ω R1=330Ω (T _{opt} =-5 to 55°C)*Note3	V _{DET1U} -0.025 V _{DET1U} -0.030	V _{DET1U} V _{DET1U}	V _{DET1U} +0.025 V _{DET1U} +0.030	V V
V _{REL1U}	CELL1 Over-charge released voltage	R1=330Ω	V _{REL1U} -0.05	V _{REL1U}	V _{REL1U} +0.05	V
tV _{DET1}	Output delay of over-charge	V _{DD} =3.5V to 4.5V, V _C -V _{SS} =3.5V	0.7	1.0	1.3	s
tV _{REL1}	Output delay of release from over-charge	V _{DD} =4.5V to 3.5V, V _C -V _{SS} =3.5V		16	21	ms
V _{DET1L}	CELL2 Over-charge detector threshold	Detect rising edge of supply voltage R1=330Ω R1=330Ω (T _{opt} =-5 to 55°C)*Note3	V _{DET1L} -0.025 V _{DET1L} -0.030	V _{DET1L} V _{DET1L}	V _{DET1L} +0.025 V _{DET1L} +0.030	V V
V _{REL1L}	CELL2 Over-charge released voltage	R1=330Ω	V _{REL1L} -0.05	V _{REL1L}	V _{REL1L} +0.05	V
V _{DET2U}	CELL1 Over-discharge threshold	Detect falling edge of supply voltage	V _{DET2U} ×0.975	V _{DET2U}	V _{DET2U} ×1.025	V
tV _{DET2}	Output delay of over-discharge	V _{DD} -V _C =3.5V to 2.2V V _C -V _{SS} =3.5V	89	128	167	ms
tV _{REL2}	Output delay of release from over-discharge	V _{DD} -V _C =2.2V to 3.5V V _C -V _{SS} =3.5V	0.7	1.2	1.7	ms
V _{DET2L}	CELL2 Over-discharge threshold	Detect falling edge of supply voltage	V _{DET2L} ×0.975	V _{DET2L}	V _{DET2L} ×1.025	V
V _{DET3}	Excess discharge-current threshold	Detect rising edge of 'V-' pin voltage	V _{DET3} -0.015	V _{DET3}	V _{DET3} +0.015	V
tV _{DET3}	Output delay of excess discharge current	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =0V to 0.5V	8	12	16	ms
tV _{REL3}	Output delay of release from excess discharge-current	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =3V to 0V	0.7	1.2	1.7	ms
V _{DET4}	Excess charge-current threshold	Detect falling edge of 'V-' pin voltage	-0.13 -0.23 -0.44	-0.10 -0.20 -0.40	-0.07 -0.17 -0.36	V V V
tV _{DET4}	Output delay of excess charge-current	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =0V to -1V	5	8	11	ms
tV _{REL4}	Output delay of release from excess charge-current	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =-1V to 0V	0.7	1.2	1.7	ms
V _{short}	Short protection voltage	V _{DD} -V _C =V _C -V _{SS} =3.5V	0.6	1.0	1.4	V
T _{short}	Output Delay of Short protection	V _{DD} -V _C =V _C -V _{SS} =3.5V, V ₋ =0V to 2V	230	300	500	μs
R _{short}	Reset resistance for Excess discharge-current protection	V _{DD} =7.2V, V ₋ =1V	25	40	75	kΩ
V _{DS}	Delay Shortening Mode input voltage	V _{DD} -V _C =V _C -V _{SS} =4.4V	-2.2	-1.6	-1.0	V
V _{OL1}	Nch ON voltage of C _{OUT}	I _{ol} =50μA V _{DD} -V _C =V _C -V _{SS} =4.5V		0.4	0.5	V
V _{OH1}	Pch ON voltage of C _{OUT}	I _{oh} =-50μA V _{DD} -V _C =V _C -V _{SS} =3.9V	6.8	7.4		V
V _{OL2}	Nch ON voltage of D _{OUT}	I _{ol} =50μA V _{DD} -V _C =V _C -V _{SS} =2.0V		0.2	0.5	V
V _{OH2}	Pch ON voltage of D _{OUT}	I _{oh} =-50μA, V _{DD} -V _C =V _C -V _{SS} =3.9V	6.8	7.4		V
I _{DD}	Supply current	V _{DD} -V _C =V _C -V _{SS} =3.9V		4.0	8.0	μA
I _S	Standby current	V _{DD} -V _C =V _C -V _{SS} =2V			0.1	μA

*Note: We compensate for this characteristic related to temperature by laser-trim, however, this specification is guaranteed by design, not production tested.

OPERATION

• VDET1U, VDET1L / Over-Charge Detectors

The VDET1U and VDET1L monitor the voltage between V_{DD} pin and V_C pin (the voltage of Cell1) and the voltage between V_C pin and V_{SS} pin (the voltage of Cell2), if either voltage becomes equal or more than the over-charge detector threshold, the over-charge is detected, and an external charge control Nch MOSFET turns off with C_{OUT} pin being at "L" level.

VDET1U is the detector of Cell1, and the VDET1L is the detector of Cell2.

To reset the over-charge and make the C_{OUT} pin level to "H" again after detecting over-charge, in such conditions that a time when the both Cell1 and Cell2 are down to a level lower than over-charge voltage, by connecting a kind of load to V_{DD} after disconnecting a charger from the battery pack. Then, the output voltage of C_{OUT} pin becomes "H", and it makes an external Nch MOSFET turn on, and charge cycle is available. In other words, once over-charge is detected, even if the supply voltage becomes low enough, if a charger is continuously connected to the battery pack, recharge is not possible. Therefore this over-charge detector has no hysteresis. To judge whether or not load is connected, the built-in excess-discharge current detector is used. By connecting some load, V_- pin voltage becomes equal or more than excess-discharge current detector threshold, and reset the over-charge detecting state.

Further, either or both voltage of Cell1 and Cell2 is higher than the over-charge detector threshold, if a charger is removed and some load is connected, C_{OUT} outputs "L", however, load current can flow through the parasitic diode of the external charge control Nch MOSFET. After that, when the V_{DD} pin voltage becomes lower than the over-charge detector threshold, C_{OUT} becomes "H".

Internal fixed output delay times for over-charge detection and release from over-charge exist. If either or both of the voltage of Cell1 or Cell2 keeps its level more than the over-charge detector threshold, and output delay time passes, over-charge voltage is detected. Even when the voltage of Cell1 or Cell2 pin level becomes equal or higher level than V_{DET1} if these voltages would be back to a level lower than the over-charge detector threshold within a time period of the output delay time, the over-charge is not detected. Besides, after detecting over-charge, while the both of Cell1 and Cell2 voltages are lower than the over-charge detector threshold, even if a charger is removed and a load is connected, if the voltage is recovered within output delay time of release from over-charge, over-charge state is not released.

A level shifter incorporated in a buffer driver for the C_{OUT} pin makes the "L" level of C_{OUT} pin to the V_- pin voltage and the "H" level of C_{OUT} pin is set to V_{DD} voltage with CMOS buffer.

• VDET2U, VDET2L / Over-Discharge Detectors

The VDET2U and VDET2L monitor the voltage between V_{DD} pin and V_C pin (Cell1 voltage) and the voltage between V_C pin and V_{SS} pin (Cell2 Voltage). When either of the cell1 or cell2 voltage becomes equal or less than the over-discharge detector threshold, the over-discharge is detected and discharge stops by the external discharge control Nch MOSFET turning off with the D_{OUT} pin being at "L" level.

To reset the over-discharge detector, if both voltages of Cell1 and Cell2 are equal or lower than the over-discharge detector threshold, a charge current flows through the parasitic diode of the external MOSFET. Then, when the VDD voltage becomes higher than the over-discharge detector threshold, DOUT becomes "H" and the external MOSFET turns on and discharge will be possible. After connecting a charger, if both voltages of cell1 and cell2 are higher than over-discharge detector threshold, DOUT becomes "H" immediately. In the case of A version, even if a charger is not connected, when the Cell1 and Cell2 voltages become equal or more than the released voltage from over-discharge, the over-discharge is released and the voltage of the DOUT pin becomes "H". Therefore, the over-discharge detector of A version has hysteresis.

When a cell voltage equals to zero, if the voltage of a charger is equal or more than 0V-charge minimum voltage (Vst), COUT pin becomes "H" and a system is allowable to charge.

The output delay time for over-discharge detect is fixed internally. Even if the voltage of Cell1 or Cell2 is down to equal or lower than the over-discharge detector threshold, if the voltage of Cell1 or Cell2 would be back to a level higher than the over-discharge detector threshold within a time period of the output delay time, the over-discharge is not detected. Output delay time for release from over-discharge is also set.

After detecting over-discharge, supply current would be reduced and be into standby by halting unnecessary circuits and consumption current of the IC itself is made as small as possible.

The output type of DOUT pin is CMOS having "H" level of VDD and "L" level of VSS.

- **VDET3 /Excess discharge-current Detector, Short Circuit Protector**

Both of the excess current detector and short circuit protection can work when the both of control FETs are in "ON" state.

When the V- pin voltage is up to a value between the short protection voltage Vshort /VDD and excess discharge-current threshold VDET3, VDET3 operates and further soaring of V- pin voltage higher than Vshort makes the short circuit protector enabled. This leads the external discharge control Nch MOSFET turns off with the DOUT pin being at "L" level.

An output delay time for the excess discharge-current detector is internally fixed.

A quick recovery of V- pin level from a value between Vshort and VDET3 within the delay time keeps the discharge control FET staying "H" state. Output delay time for Release from excess discharge-current detection is also set.

When the short circuit protector is enabled, the DOUT would be "L" and the delay time is also set.

The V - pin has a built-in pull-down resistor to the Vss pin, that is, the resistance to release from excess-discharge current.

After an excess discharge-current or short circuit protection is detected, removing a cause of excess discharge-current or external short circuit makes an external discharge control FET to an "ON" state automatically with the V- pin level being down to the Vss level through the built-in pulled down resistor.

The reset resistor of excess discharge-current is off at normal state. Only when detecting excess discharge-current or short circuit, the resistor is on.

Output delay time of excess discharge-current is set shorter than the delay time for over-discharge detector. Therefore, if V_{DD} voltage would be lower than V_{DET2} at the same time as the excess discharge-current is detected, the R5460xxxxxx is at excess discharge-current detection mode. By disconnecting a load, VDET3 is automatically released from excess discharge-current.

- **VDET4/ Excess charge-current detector**

When the battery pack is chargeable and discharge is also possible, VDET4 senses V- pin voltage. For example, in case that a battery pack is charged by an inappropriate charger, an excess current flows, then the voltage of V- pin becomes equal or less than excess charge-current detector threshold. Then, the output of COUT becomes "L", and prevents from flowing excess current in the circuit by turning off the external Nch MOSFET.

Output delay of excess charge current is internally fixed. Even the voltage level of V- pin becomes equal or lower than the excess charge-current detector threshold, the voltage is higher than the VDET4 threshold within the delay time, the excess charge current is not detected. Output delay for the release from excess charge current is also set.

VDET4 can be released with disconnecting a charger and connecting a load.

- **DS (Delay Shorten) function**

Output delay time of over-charge, over-discharge, and release from those detecting modes can be shorter than those setting value by forcing equal or less than the delay shortening mode voltage to V- pin when the COUT is "H".


- **Operation against 2-Cell Unbalance**

A version: If one of the cells detects over-charge and the output of COUT becomes "L" and keeps the status, even if the other cell detects over-charge or over-discharge or short, the over-charge status is maintained and the output of COUT keeps "L". If one of the cell detects over-charge and the output of COUT becomes "L", the other cell detects over-discharge and the former cell is released from over-charge, after the delay time of the released from over-charge, the output of COUT becomes "H", and after the delay time of detecting over-discharge, the output of DOUT becomes "L". After detecting over-discharge, A version halts internal unnecessary circuits and be into the standby mode. (Supply current Max. 2.0 μ A)

B version: If one of the cells detects over-charge and the output of COUT becomes "L" and keeps the status, even if the other cell detects over-charge or over-discharge or short, the over-charge status is maintained and the output of COUT keeps "L". If one of the cells detects over-discharge and the output of DOUT becomes "L", even if the other cell detects over-charge, the former cell also detects over-discharge, therefore, the output of DOUT keeps "L". After detecting over-discharge, B version halts internal unnecessary circuits and becomes into the standby mode. (Supply current Max. 0.1 μ A).

Both A version and B version, the external FETs do not turn off at the same time.

TYPICAL APPLICATION AND TECHNICAL NOTES

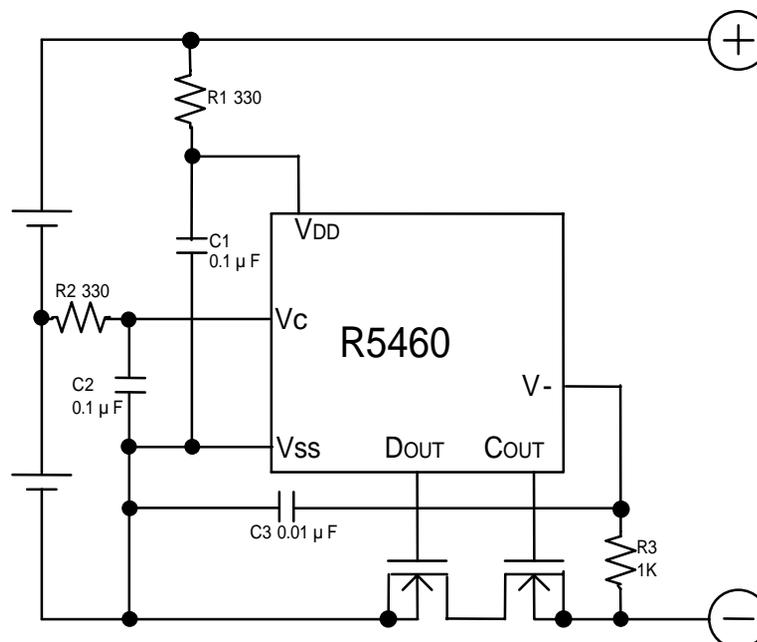

TECHNICAL NOTES

R1, R2, C1 and C2 stabilize a supply voltage to the R5460xxxxxx. A recommended R1, R2 value is less than 1kΩ.

A larger value of R1 and R2 makes the detection voltage shift higher because of some conduction current in the R5460xxxxxx.

To stabilize the operation, the value of C1 and C2 should be equal or more than 0.01μF.

R1 and R3 can operate also as parts for current limit circuit against reverse charge or applying a charger with excess charging voltage beyond the absolute maximum rating of the R5460xxxxxx, the battery pack. Small value of R1 and R3 may cause over-power consumption rating of power dissipation of the R5460xxxxxx. Thus, the total value of 'R1+R3' should be equal or more than 1kΩ.

If R3 value is set too large, after detecting over-discharge, release operation by connecting a charger may be impossible, our recommendation value as R3 is 3kΩ or less.

To stabilize the operation of the IC, use 0.01μF or more capacitor as C3.

The typical application circuit diagram is just an example. This circuit performance largely depends on the PCB layout and external components. In the actual application, fully evaluation is necessary.

Over-voltage and the over current beyond the absolute maximum rating should not be forced to the protection IC and external components.

We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire-containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.