

## Green-Mode PWM Controller with Integrated Protections

Rev. 01

### General Description

The LD7535/LD7535A are low cost, low startup current, current mode PWM controllers with green-mode power-saving operation. The integrated functions include the leading-edge blanking of the current sensing, internal slope compensation and the tiny package of SOT-26. They provide the users a superior AC/DC power application of higher efficiency, low external component counts, and lower cost solution.

Furthermore, LD7535/LD7535A feature more protections like OLP (Over Load Protection) and OVP (Over Voltage Protection) to eliminate the external protection circuits. And to satisfy different designs, 2 versions of OVP levels are implemented as ---

- LD7535 ---  $28.0V \pm 1.5V$ .
- LD7535A ---  $21.0V \pm 1.5V$ .


### Features

- High-Voltage CMOS Process with Excellent ESD protection
- Very Low Startup Current ( $<20\mu A$ )
- Current Mode Control
- Non-audible-noise Green Mode Control
- UVLO (Under Voltage Lockout)
- LEB (Leading-Edge Blanking) on CS Pin
- Programmable Switching Frequency
- Internal Slope Compensation
- OVP (Over Voltage Protection) on Vcc Pin
- OLP (Over Load Protection)
- 300mA Driving Capability

### Applications


- Switching AC/DC Adaptor and Battery Charger
- Open Frame Switching Power Supply
- 384X Replacement

### Typical Application

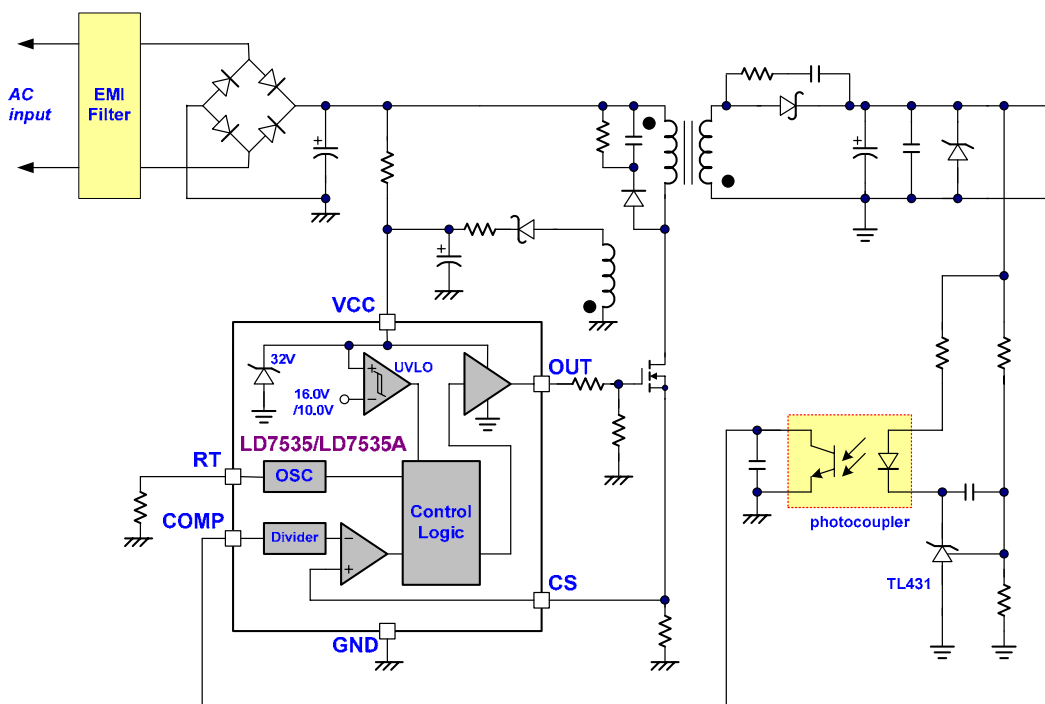


## Pin Configuration

DIP-8 (TOP VIEW)



SOT-26 (TOP VIEW)



YY, Y : Year code (D: 2004, E: 2005.....)  
 WW, W: Week code  
 P : LD75..  
 (Product family code)  
 ## : Production code

## Ordering Information


| Part number | Package | TOP MARK  | Shipping           |
|-------------|---------|-----------|--------------------|
| LD7535 BL   | SOT-26  | YWP/35    | 3000 /tape & reel  |
| LD7535 BN   | DIP-8   | LD7535BN  | 3600 /tube /Carton |
| LD7535A BL  | SOT-26  | YWP/35A   | 3000 /tape & reel  |
| LD7535A BN  | DIP-8   | LD7535ABN | 3600 /tube /Carton |

The LD7535/ LD7535A are ROHS Compliant.

## Pin Descriptions

| PIN | NAME | FUNCTION                                                                                                                                   |
|-----|------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | GND  | Ground                                                                                                                                     |
| 2   | COMP | Voltage feedback pin (same as the COMP pin in UC384X), By connecting a photo-coupler to close the control loop and achieve the regulation. |
| 3   | RT   | This pin is to program the switching frequency. By connecting a resistor to ground to set the switching frequency.                         |
| 4   | CS   | Current sense pin, connect to sense the MOSFET current                                                                                     |
| 5   | VCC  | Supply voltage pin                                                                                                                         |
| 6   | OUT  | Gate drive output to drive the external MOSFET                                                                                             |

## Block Diagram

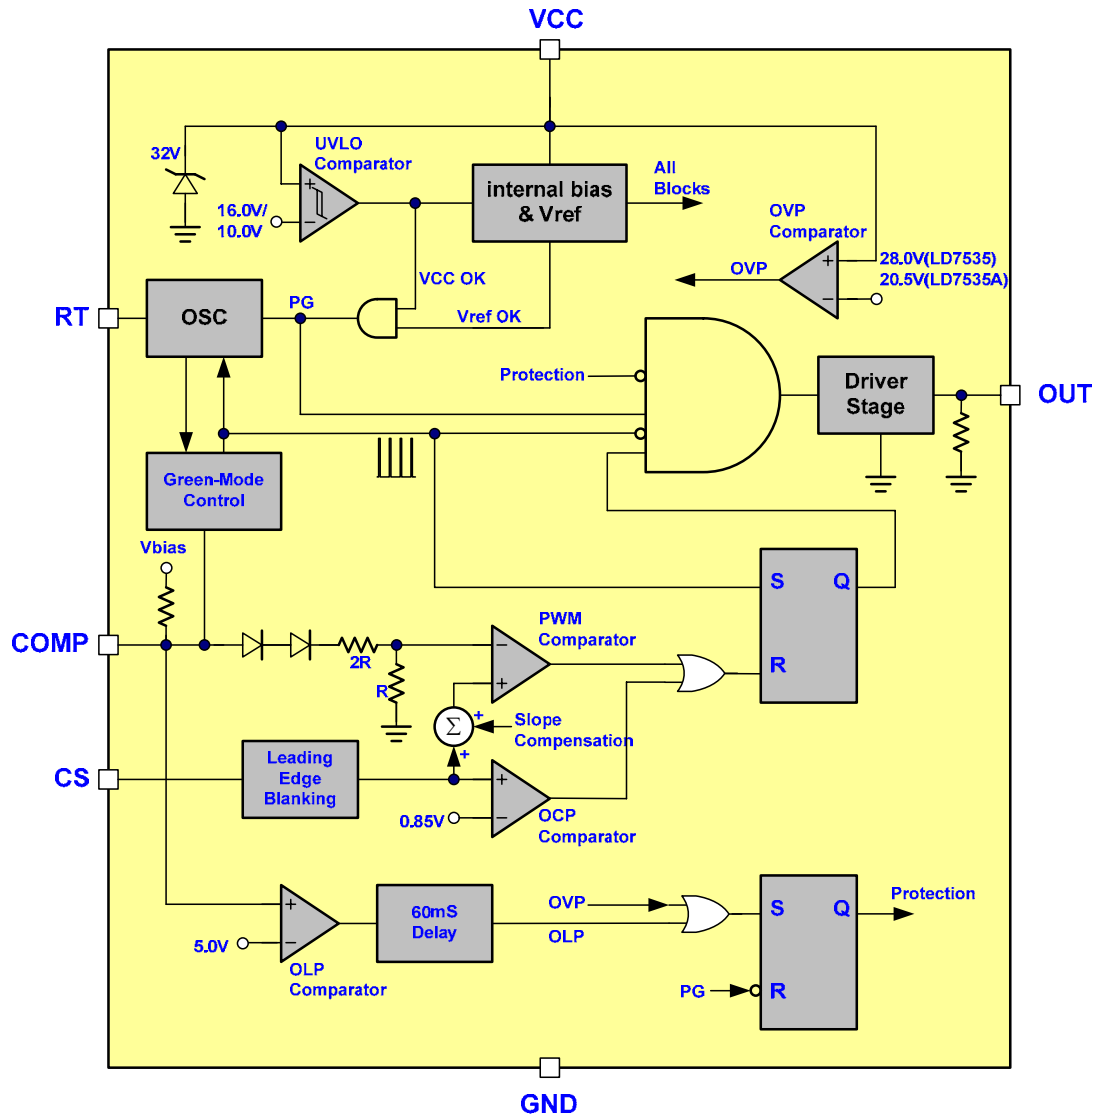

\* Note: OLP delay is 60mS when the switching frequency is set as 65KHz.

The OLP delay time is proportional to the period of switching cycle.

$$\text{That is, } T_{\text{OLP\_delay}} \propto T_s = \frac{1}{f_s}.$$

**Absolute Maximum Ratings**

|                                                                |                |
|----------------------------------------------------------------|----------------|
| Supply Voltage VCC.....                                        | 30V            |
| COMP, RT, CS.....                                              | -0.3 ~7V       |
| Junction Temperature.....                                      | 150°C          |
| Operating Ambient Temperature.....                             | -40°C to 85°C  |
| Storage Temperature Range.....                                 | -65°C to 150°C |
| Package Thermal Resistance (SOT-26).....                       | 250°C/W        |
| Package Thermal Resistance (DIP-8).....                        | 100°C/W        |
| Power Dissipation (SOT-26, at Ambient Temperature = 85°C)..... | 250mW          |
| Power Dissipation (DIP-8, at Ambient Temperature = 85°C).....  | 650mW          |
| Lead temperature (Soldering, 10sec).....                       | 260°C          |
| ESD Voltage Protection, Human Body Model.....                  | 3KV            |
| ESD Voltage Protection, Machine Model.....                     | 250V           |
| Gate Output Current.....                                       | 300mA          |

**Caution:**

Stresses beyond the ratings specified in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

**Recommended Operating Conditions**

| Item                         | Min. | Max. | Unit |
|------------------------------|------|------|------|
| Supply Voltage Vcc (LD7535)  | 11   | 25   | V    |
| Supply Voltage Vcc (LD7535A) | 11   | 18   | V    |
| Switching Frequency          | 50   | 130  | KHz  |
| Startup Resistor Value       | 1.2  | 4.4  | MΩ   |

## Electrical Characteristics

(T<sub>A</sub> = +25°C unless otherwise stated, V<sub>CC</sub>=15.0V)

| PARAMETER                                       | CONDITIONS                    | MIN  | TYP  | MAX  | UNITS |
|-------------------------------------------------|-------------------------------|------|------|------|-------|
| <b>Supply Voltage (Vcc Pin)</b>                 |                               |      |      |      |       |
| Startup Current                                 |                               |      | 8    | 20   | μA    |
| Operating Current<br>(with 1nF load on OUT pin) | V <sub>COMP</sub> =0V         |      | 2.0  | 3.0  | mA    |
|                                                 | V <sub>COMP</sub> =3V         |      | 2.5  |      | mA    |
|                                                 | Protection tripped (OLP, OVP) |      | 0.5  |      | mA    |
| UVLO (off)                                      |                               | 9.0  | 10.0 | 11.0 | V     |
| UVLO (on)                                       |                               | 15.0 | 16.0 | 17.0 | V     |
| OVP Level                                       | LD7535                        | 26.5 | 28.0 | 29.5 | V     |
|                                                 | LD7535A                       | 19.5 | 21.0 | 22.5 | V     |
| <b>Voltage Feedback (Comp Pin)</b>              |                               |      |      |      |       |
| Short Circuit Current                           | V <sub>COMP</sub> =0V         |      | 1.5  | 2.2  | mA    |
| Open Loop Voltage                               | COMP pin open                 |      | 6.0  |      | V     |
| Green Mode Threshold VCOMP                      |                               |      | 2.35 |      | V     |
| <b>Current Sensing (CS Pin)</b>                 |                               |      |      |      |       |
| Maximum Input Voltage, V <sub>cs(off)</sub>     |                               | 0.80 | 0.85 | 0.90 | V     |
| Leading Edge Blanking Time                      |                               |      | 350  |      | nS    |
| Input impedance                                 |                               | 1    |      |      | MΩ    |
| Delay to Output                                 |                               |      | 100  |      | nS    |
| <b>Oscillator (RT pin)</b>                      |                               |      |      |      |       |
| Frequency                                       | RT=100KΩ                      | 60   | 65   | 70   | KHz   |
| Green Mode Frequency                            | F <sub>s</sub> =65KHz         |      | 20   |      | KHz   |
| Temp. Stability                                 | (-40°C ~105°C)                |      |      | 3    | %     |
| Voltage Stability                               | (VCC=11V-25V)                 |      |      | 1    | %     |
| <b>Gate Drive Output (OUT Pin)</b>              |                               |      |      |      |       |
| Output Low Level                                | VCC=15V, I <sub>o</sub> =20mA |      |      | 1    | V     |
| Output High Level                               | VCC=15V, I <sub>o</sub> =20mA | 8    |      |      | V     |
| Rising Time                                     | Load Capacitance=1000pF       |      | 50   | 200  | nS    |
| Falling Time                                    | Load Capacitance=1000pF       |      | 30   | 100  | nS    |
| <b>OLP (Over Load Protection)</b>               |                               |      |      |      |       |
| OLP Trip Level                                  | V <sub>COMP</sub> (OLP)       |      | 5.0  |      | V     |
| OLP Delay Time (note)                           | F <sub>s</sub> =65KHz         |      | 60   |      | mS    |

Note: The OLP delay time is proportional to the period of switching cycle. So that, the lower RT value will set the higher switching frequency and the shorter OLP delay time.

## Typical Performance Characteristics

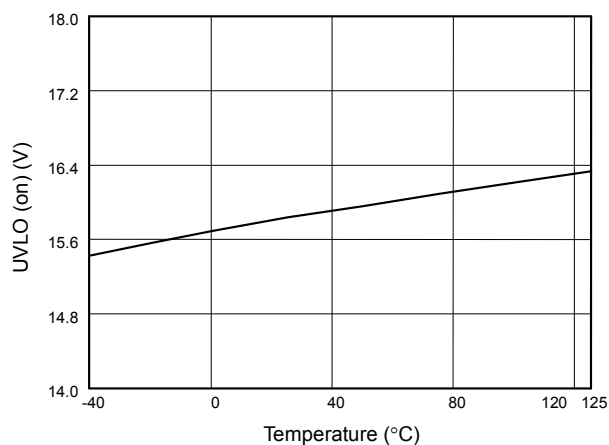


Fig. 1 UVLO (on) vs. Temperature

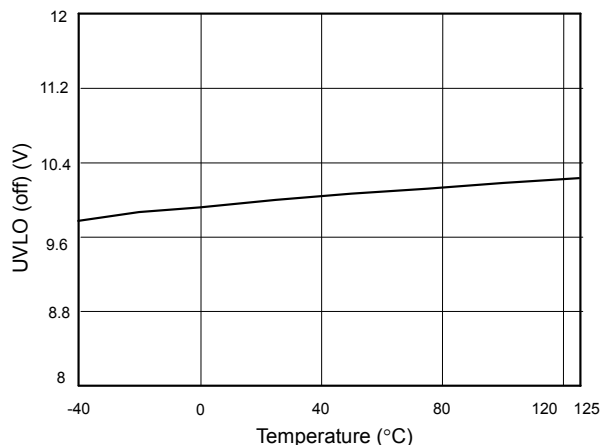


Fig. 2 UVLO (off) vs. Temperature

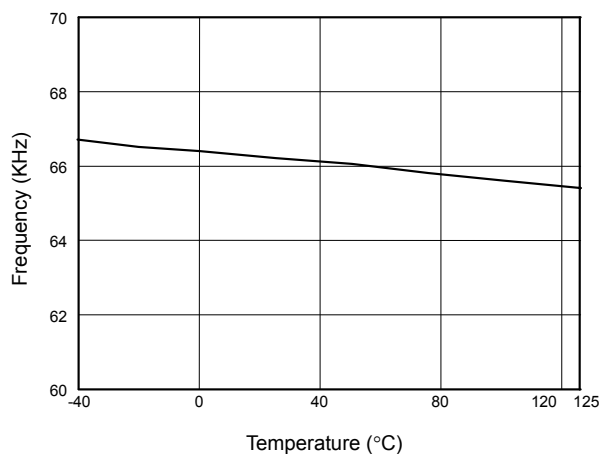


Fig. 3 Frequency vs. Temperature

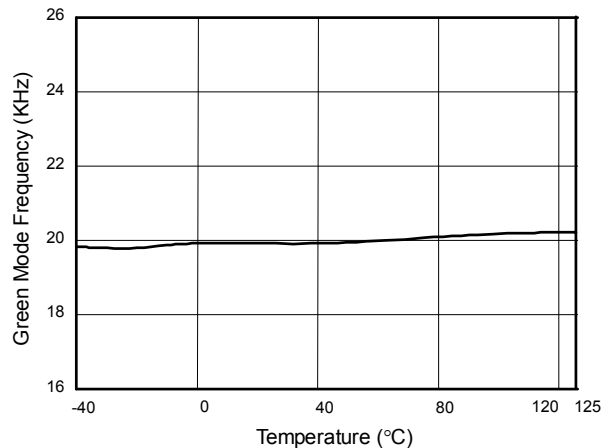


Fig. 4 Green Mode Frequency vs. Temperature

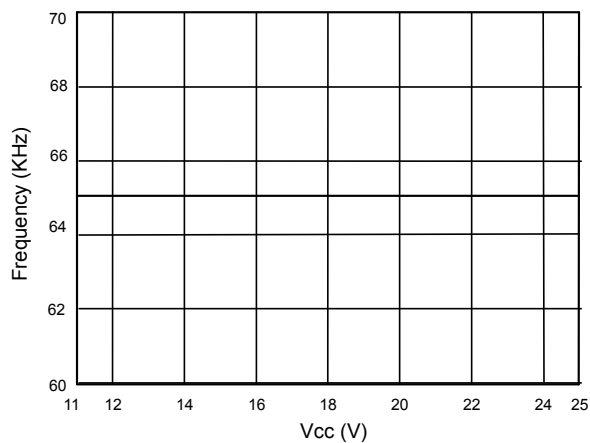


Fig. 5 Frequency vs. Vcc

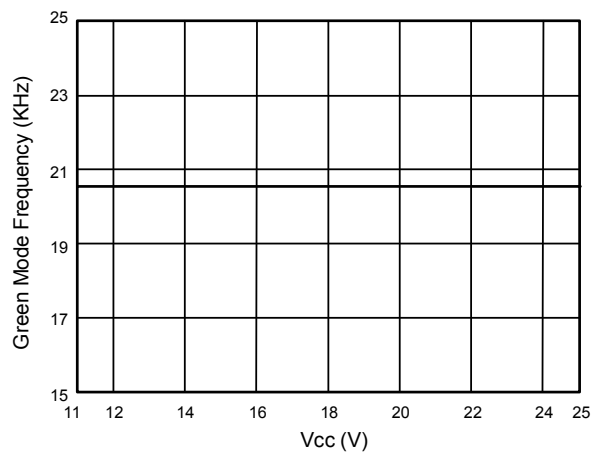


Fig. 6 Green Mode Frequency vs. Vcc

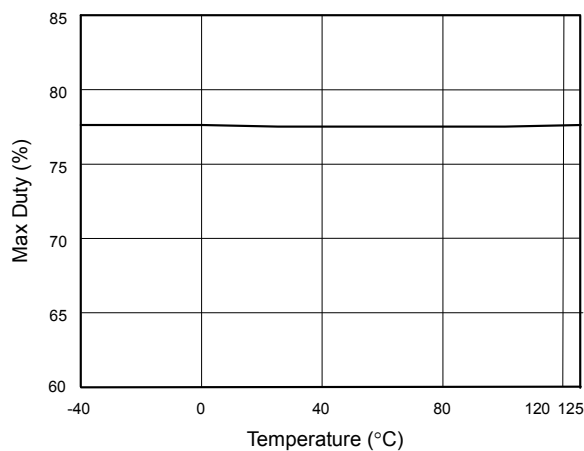


Fig. 7 Max Duty vs. Temperature

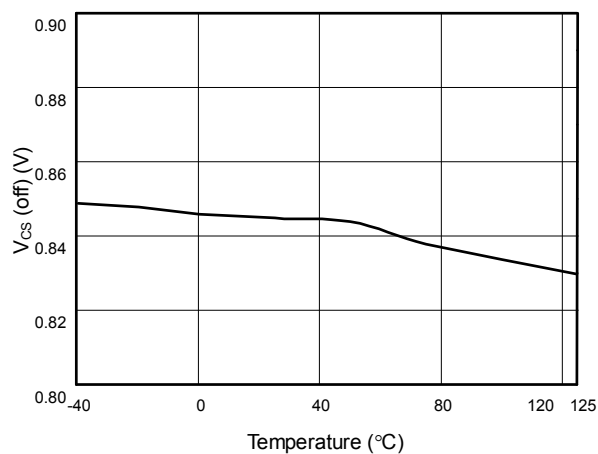


Fig. 8 V<sub>CS(off)</sub> vs. Temperature

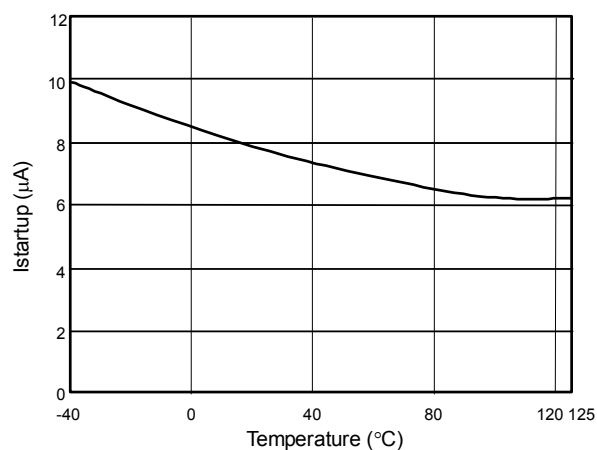


Fig. 9 Startup Current (I<sub>start-up</sub>) vs. Temperature

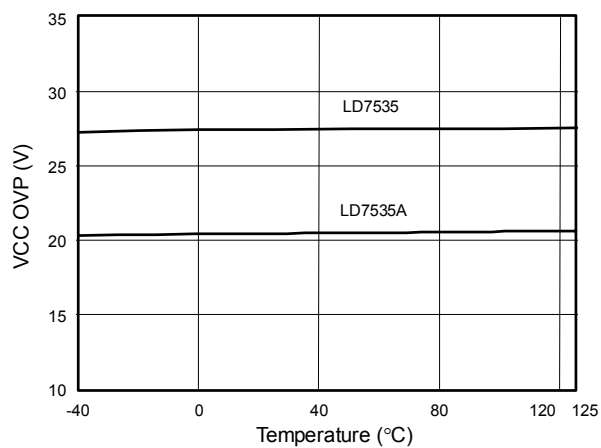


Fig. 10 VCC OVP vs. Temperature

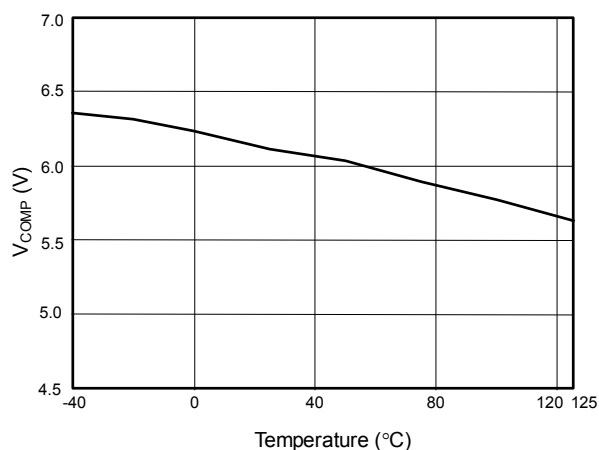


Fig. 11 V<sub>COMP</sub> open loop voltage vs. Temperature

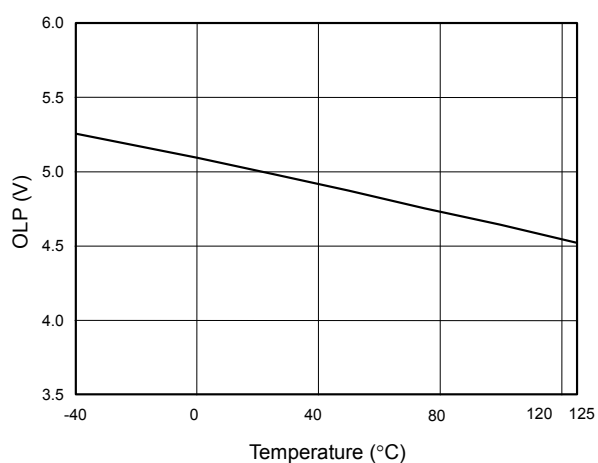


Fig. 12 OLP-Trip Level vs. Temperature

## Application Information

### Operation Overview

The LD7535/LD7535A meet the green-power requirement and are intended for the use in those modern switching power suppliers and adaptors which demand higher power efficiency and power-saving. They integrated more functions to reduce the external component counts and the size. Their major features are described as below.

### Under Voltage Lockout (UVLO)

An UVLO comparator is implemented in it to detect the voltage on the VCC pin. It would assure the supply voltage enough to turn on the LD7535/LD7535A PWM controller and further to drive the power MOSFET. As shown in Fig. 13, a hysteresis is built in to prevent the shutdown from the voltage dip during startup. The turn-on and turn-off threshold level are set at 16.0V and 10.0V, respectively.

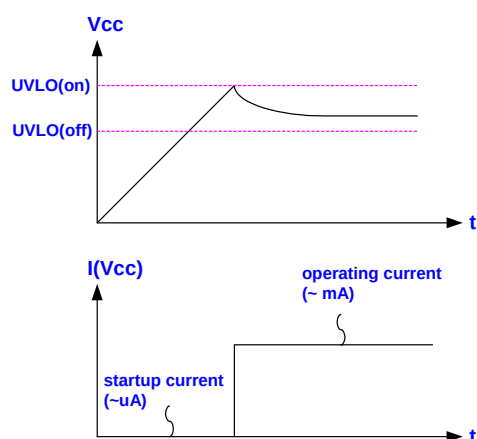


Fig. 13

### Startup Current and Startup Circuit

The typical startup circuit to generate the LD7535/LD7535A Vcc is shown in Fig. 14. During the startup transient, the Vcc is lower than the UVLO threshold thus there is no gate pulse produced from LD7535/LD7535A to drive power MOSFET. Therefore, the current through R1 will provide the startup current and to charge the capacitor C1. Whenever the Vcc voltage is high enough to turn on the LD7535/LD7535A and further to deliver the gate drive signal, the supply current is provided from the auxiliary winding of

the transformer. Lower startup current requirement on the PWM controller will help to increase the value of R1 and then reduce the power consumption on R1. By using CMOS process and the special circuit design, the maximum startup current of LD7535/LD7535A is only 20μA.

If a higher resistance value of the R1 is chosen, it usually takes more time to start up. To carefully select the value of R1 and C1 will optimize the power consumption and startup time.

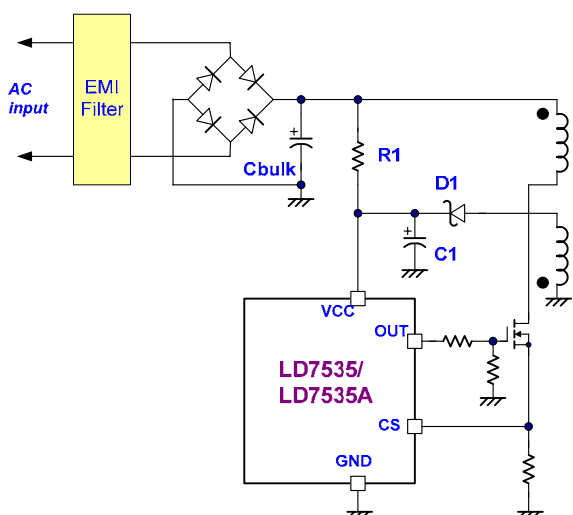


Fig. 14

### Current Sensing and Leading-edge Blanking

The typical current mode of PWM controller feedbacks both current signal and voltage signal to close the control loop and achieve regulation. As shown in Fig. 15, the LD7535/LD7535A detect the primary MOSFET current from the CS pin, which is not only for the peak current mode control but also for the pulse-by-pulse current limit. The maximum voltage threshold of the current sensing pin is set at 0.85V. From above, the MOSFET peak current can be obtained from below.

$$I_{PEAK(MAX)} = \frac{0.85V}{R_S}$$



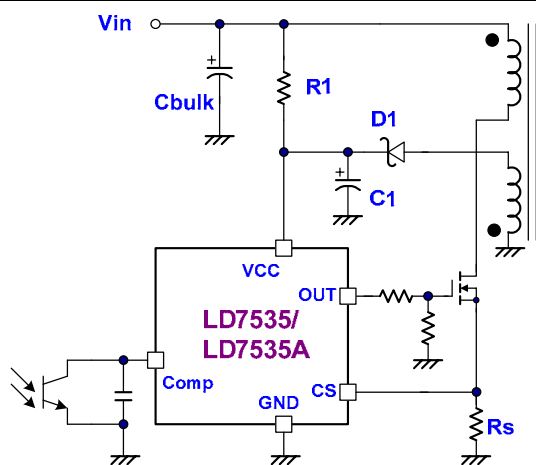


Fig. 15

A 350nS leading-edge blanking (LEB) time is included in the input of CS pin to prevent the false-trigger from the current spike. In the low power application, if the total pulse width of the turn-on spikes is less than 350nS and the negative spike on the CS pin doesn't exceed -0.3V, it could eliminated the R-C filter (as shown in the figure16).

However, the total pulse width of the turn-on spike is decided by the output power, circuit design and PCB layout. It is strongly recommended to adopt a smaller R-C filter (as shown in figure 17) for higher power application to avoid the CS pin being damaged by the negative turn-on spike.

## Output Stage and Maximum Duty-Cycle

An output stage of a CMOS buffer, with typical 300mA driving capability, is incorporated to drive a power MOSFET directly. And the maximum duty-cycle of LD7535/LD7535A is limited to 75% to avoid the transformer saturation.

## Oscillator and Switching Frequency

Connect a resistor from RT pin to GND according to the equation below to program the normal switching frequency:

$$f_{SW} = \frac{65.0}{RT(K\Omega)} \times 100(KHz)$$

The operating frequency range for the LD7535/LD7535A is recommended to set between 50KHz and 130KHz.

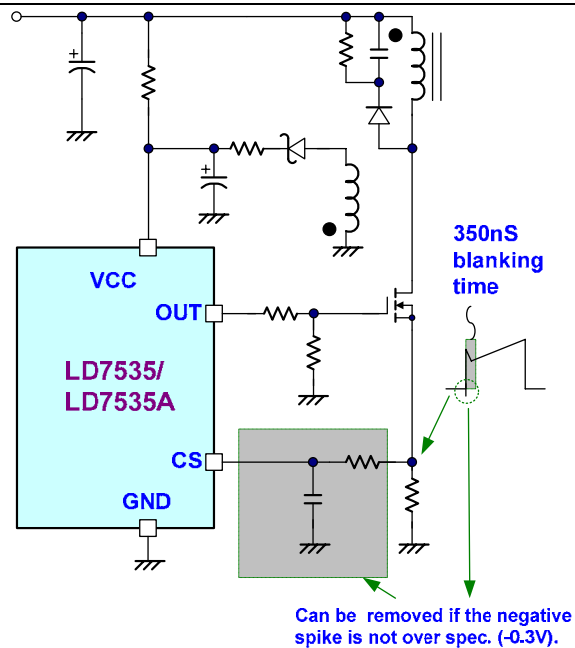


Fig. 16

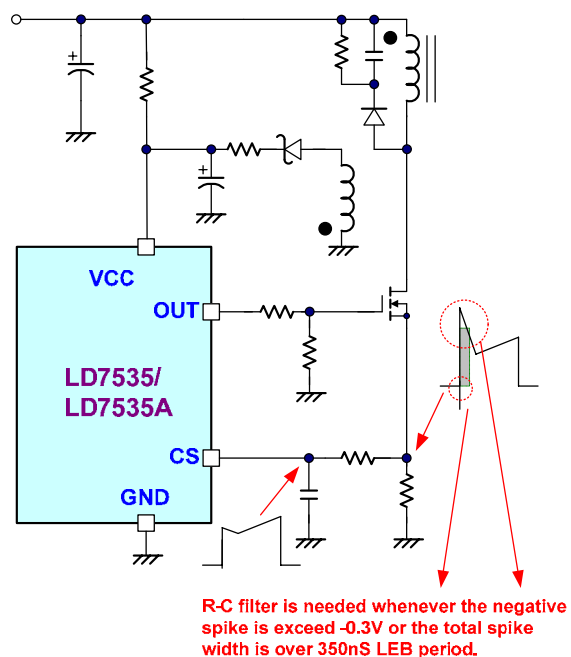


Fig. 17

## Voltage Feedback Loop

The voltage feedback signal is provided from the TL431 at the secondary side through the photo-coupler to the COMP pin of the LD7535/LD7535A. Similar to UC3842, the LD7535/LD7535A would carry 2 diodes voltage offset at the stage to feed the voltage divider at the ratio of 1/3, that is,

$$V_{-(PWM_{COMPARATOR})} = \frac{1}{3} \times (V_{COMP} - 2V_F)$$

A pull-high resistor is embedded internally and can be eliminated externally.

## Internal Slope Compensation

In the conventional application, the problem of the stability is a critical issue for current mode controlling, when it operates in higher than 50% of the duty-cycle. As UC384X, It takes slope compensation from injecting the ramp signal of the RT/CT pin through a coupling capacitor. It therefore requires no extra design for the LD7535/LD7535A since it has integrated it already.

## On/Off Control

The LD7535/LD7535A can be turned off by pulling COMP pin lower than 1.2V. The gate output pin of the LD7535/LD7535A will be disabled immediately under such condition. The off-mode can be released when the pull-low signal is removed.

## Dual-Oscillator Green-Mode Operation

There are many different topologies has been implemented in different chips for the green-mode or power saving requirements such as "burst-mode control", "skipping-cycle mode", "variable off-time control"...etc. The basic operation theory of all these approaches intended to reduce the switching cycles under light-load or no-load condition either by skipping some switching pulses or reduce the switching frequency.

By using this dual-oscillator control, the green-mode frequency can be well controlled and further to avoid the generation of audible noise.

## OVP (Over Voltage Protection) on Vcc

The  $V_{GS}$  ratings of the nowadays power MOSFETs are often limited up to max. 30V. To prevent the  $V_{GS}$  from the fault condition, LD7535/LD7535A are implemented an OVP function on Vcc. Whenever the Vcc voltage is higher than the OVP threshold voltage, the output gate drive circuit will be shutdown simultaneously thus to stop the switching of the power MOSFET until the next UVLO(on).

The Vcc OVP function in LD7535/LD7535A is an auto-recovery type protection. If the OVP condition, usually caused by the feedback loop opened, is not released, the Vcc will tripped the OVP level again and re-shutdown the output. The Vcc is working as a hiccup mode. The Figure. 18 shows its operation.

On the other hand, if the OVP condition is removed, the Vcc level will get back to normal level and the output will automatically return to the normal operation.

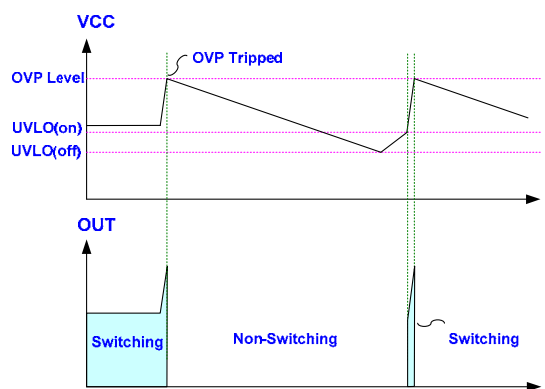


Fig. 18


The OVP levels are ---

- LD7535 ---  $28.0V \pm 1.5V$ .
- LD7535A ---  $21.0V \pm 1.5V$ .

## Over Load Protection (OLP)

To protect the circuit from being damaged under over load condition or short condition, a smart OLP function is implemented in the LD7535/LD7535A. The figure 20 shows the waveforms of the OLP operation. In this case, the feedback system will force the voltage loop proceed toward the saturation and then pull up the voltage on COMP pin ( $V_{COMP}$ ). Whenever the  $V_{COMP}$  trips up to the OLP threshold 5V and stays longer than 60mS, the protection will activate and then turn off the gate output to stop the switching of power circuit. The 60mS delay time is to prevent the false trigger from the power-on and turn-off transient.

By such protection mechanism, the average input power can be reduced to very low level so that the component temperature and stress can be controlled within the safe operating area.

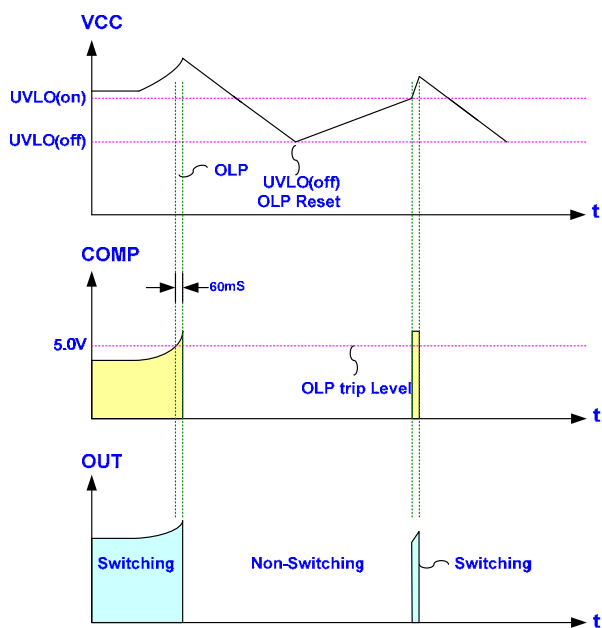

**Fig. 19**

Under the conditions listed below, the gate output will turn off immediately to protect the power circuit ---


- RT pin short to ground
- RT pin floating
- CS pin floating

## Fault Protection

There are several critical protections were integrated in the LD7535/LD7535A to prevent the power supply or adapter from being damaged. Those damages usually come from open or short condition on the pins of LD7535/LD7535A.

## Reference Application Circuit --- 10W (5V/2A) Adapter

### Schematic

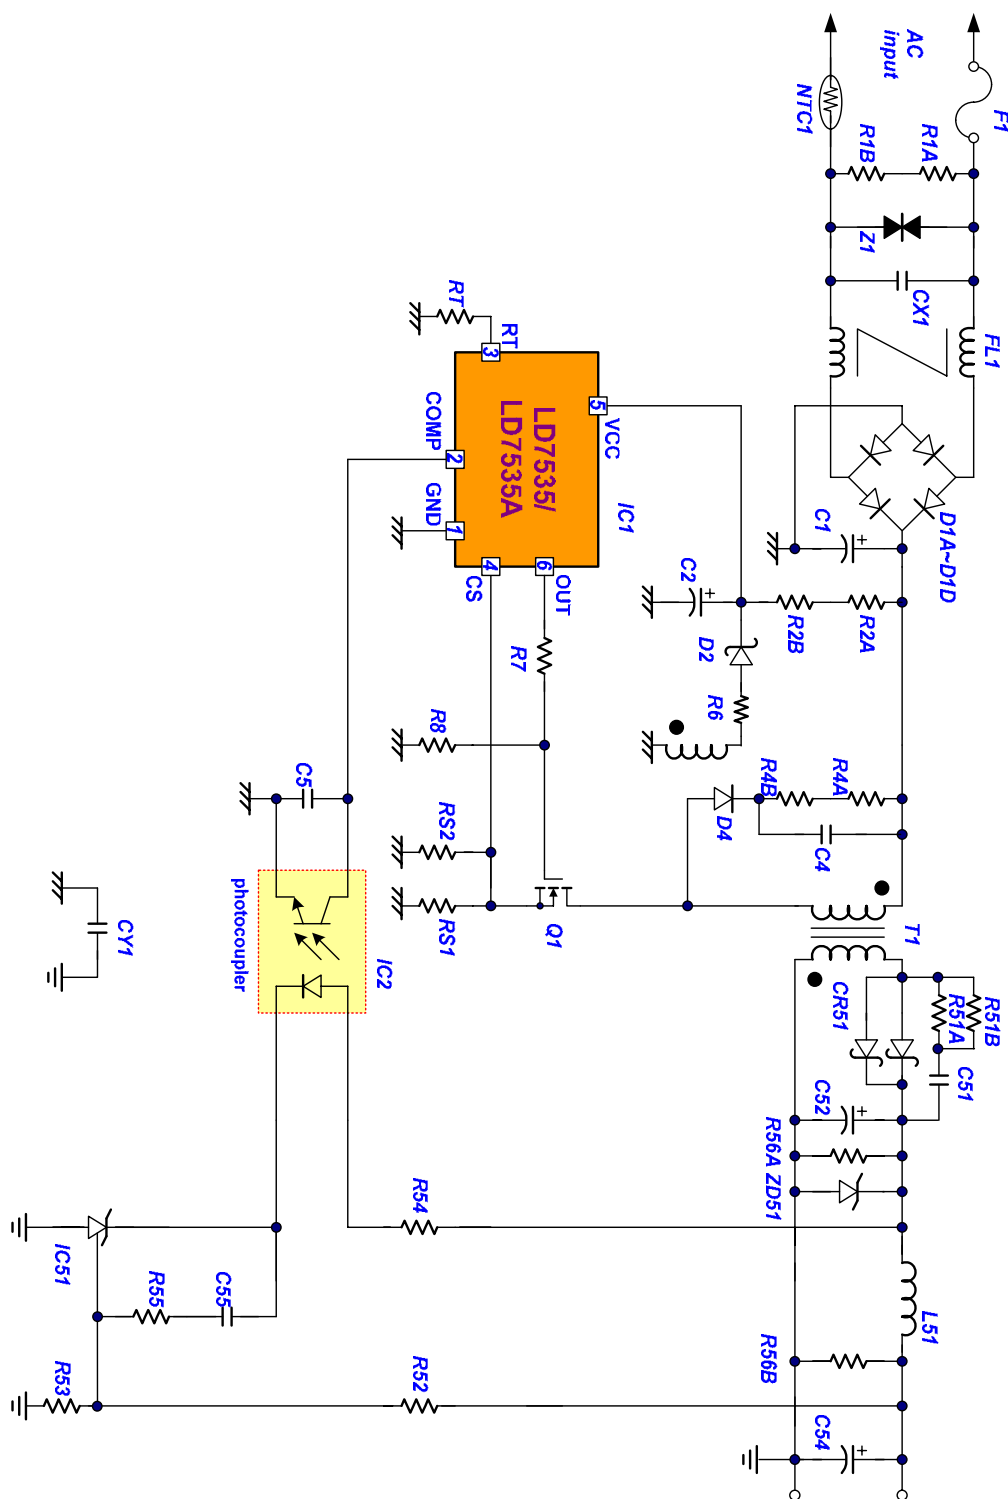

## Reference Application Circuit --- 10W (5V/2A) Adapter


### BOM

| P/N  | Component Value           | Original |
|------|---------------------------|----------|
| R1A  | N/A                       |          |
| R1B  | N/A                       |          |
| R2A  | 750K $\Omega$ , 1206      |          |
| R2B  | 750K $\Omega$ , 1206      |          |
| R4A  | 39K $\Omega$ , 1206       |          |
| R4B  | 39K $\Omega$ , 1206       |          |
| R6   | 10 $\Omega$ , 1206        |          |
| R7   | 10 $\Omega$ , 1206        |          |
| R8   | 10K $\Omega$ , 1206       |          |
| RS1  | 2.70 $\Omega$ , 1206, 1%  |          |
| RS2  | 2.70 $\Omega$ , 1206, 1%  |          |
| RT   | 100K $\Omega$ , 0805, 1%  |          |
| R51A | 100 $\Omega$ , 1206       |          |
| R51B | 100 $\Omega$ , 1206       |          |
| R52  | 2.49K $\Omega$ , 0805, 1% |          |
| R53  | 2.49K $\Omega$ , 0805, 1% |          |
| R54  | 220 $\Omega$ , 0805       |          |
| R55  | 10K $\Omega$ , 0805       |          |
| R56A | 510 $\Omega$ , 1206       |          |
| R56B | N/A                       |          |
| NTC1 | 08SP005                   |          |
| FL1  | 20mH                      | UU9.8    |
| T1   | EI-22                     |          |
| L51  | 2.7 $\mu$ H               |          |

| P/N  | Component Value         | Note      |
|------|-------------------------|-----------|
| C1   | 22 $\mu$ F, 400V        | L-tec     |
| C2   | 10 $\mu$ F, 50V         |           |
| C4   | 1000pF, 1000V, 1206     | Holystone |
| C5   | 0.01 $\mu$ F, 16V, 0805 |           |
| C51  | 1000pF, 50V, 0805       |           |
| C52  | 1000 $\mu$ F, 10V       | L-tec     |
| C54  | 470 $\mu$ F, 10V        | L-tec     |
| C55  | 0.01 $\mu$ F, 16V, 0805 |           |
| CX1  | 0.1 $\mu$ F             | X-cap     |
| CY1  | 2200pF                  | Y-cap     |
| D1A  | 1N4007                  |           |
| D1B  | 1N4007                  |           |
| D1C  | 1N4007                  |           |
| D1D  | 1N4007                  |           |
| D2   | PS102R                  |           |
| D4   | 1N4007                  |           |
| Q1   | 2N60B                   | 600V/2A   |
| CR51 | SB540                   |           |
| ZD51 | 6V2C                    |           |
| IC1  | LD7535/LD7535A BL       | SOT-26    |
| IC2  | EL817B                  |           |
| IC51 | TL431                   | 1%        |
| F1   | 250V, 1A                |           |
| Z1   | N/A                     |           |

## Reference Application Circuit #2 --- 10W Adapter with 2-Stage Startup Circuit

$P_{in} < 0.25W$  when  $P_{out} = 0W$

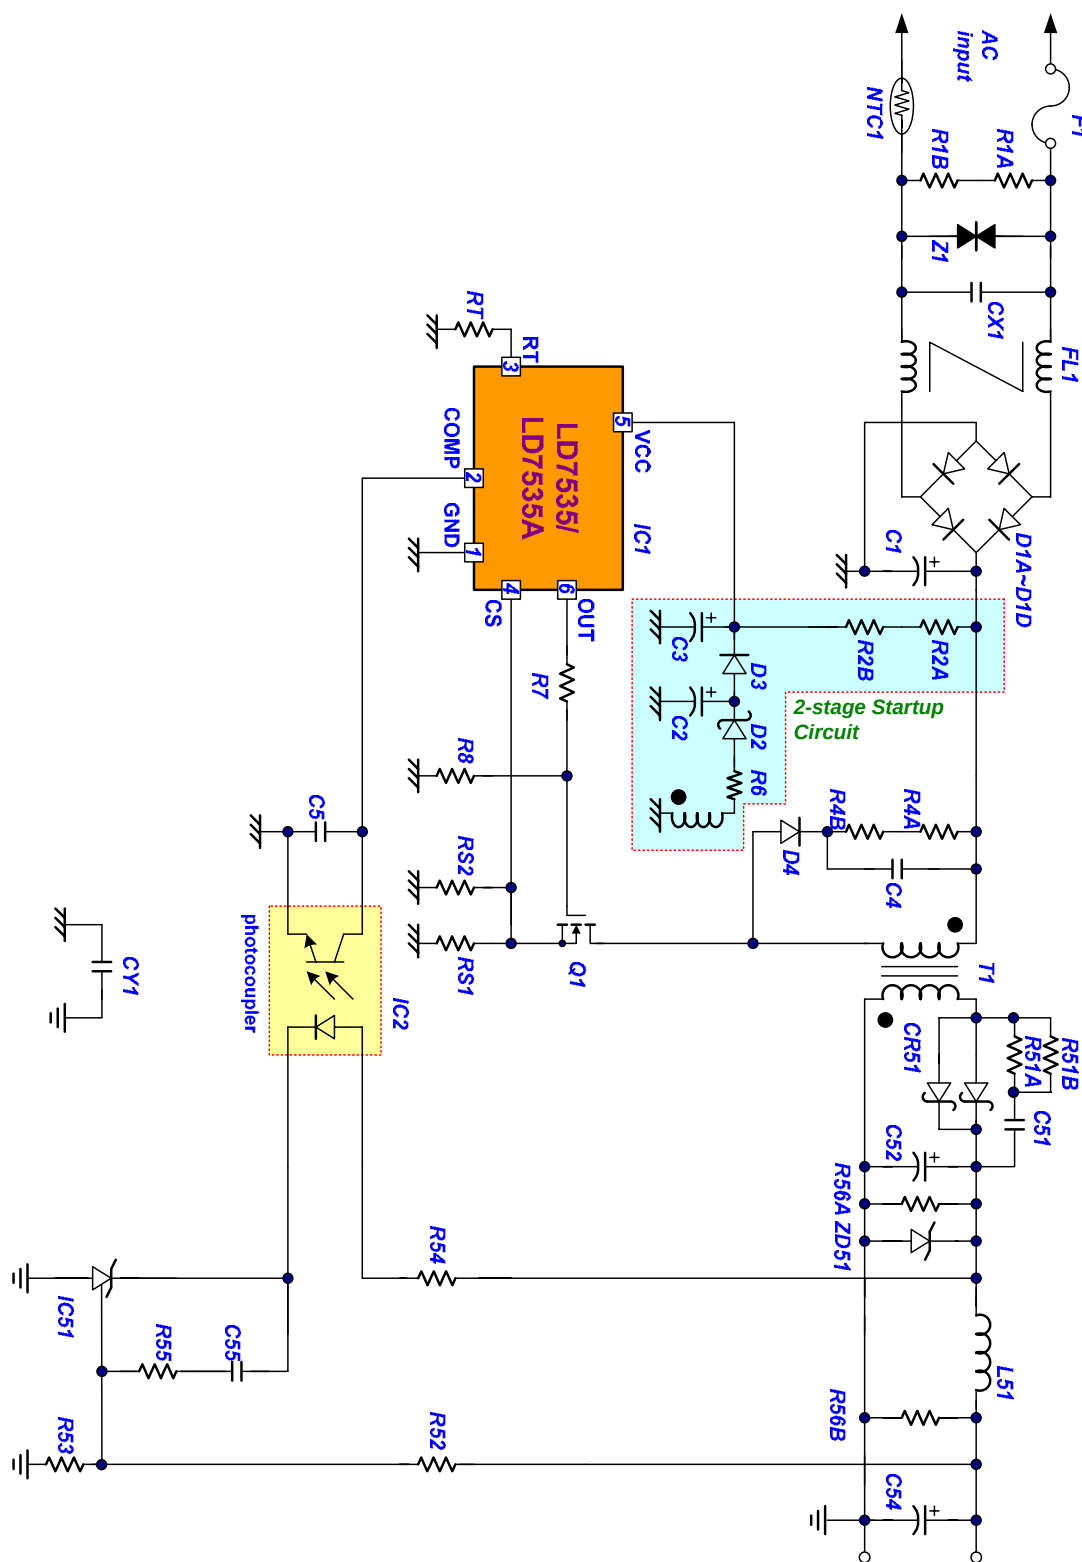


## Reference Application Circuit #2 --- 10W Adapter with 2-Stage Startup Circuit

### BOM

| P/N  | Component Value           | Original |
|------|---------------------------|----------|
| R1A  | N/A                       |          |
| R1B  | N/A                       |          |
| R2A  | 2.2M $\Omega$ , 1206      |          |
| R2B  | 2.2M $\Omega$ , 1206      |          |
| R4A  | 39K $\Omega$ , 1206       |          |
| R4B  | 39K $\Omega$ , 1206       |          |
| R6   | 2.2 $\Omega$ , 1206       |          |
| R7   | 10 $\Omega$ , 1206        |          |
| R8   | 10K $\Omega$ , 1206       |          |
| RS1  | 2.70 $\Omega$ , 1206, 1%  |          |
| RS2  | 2.70 $\Omega$ , 1206, 1%  |          |
| RT   | 100K $\Omega$ , 0805, 1%  |          |
| R51A | 100 $\Omega$ , 1206       |          |
| R51B | 100 $\Omega$ , 1206       |          |
| R52  | 2.49K $\Omega$ , 0805, 1% |          |
| R53  | 2.49K $\Omega$ , 0805, 1% |          |
| R54  | 220 $\Omega$ , 0805       |          |
| R55  | 10K $\Omega$ , 0805       |          |
| R56A | 1K $\Omega$ , 1206        |          |
| R56B | N/A                       |          |
| NTC1 | 5 $\Omega$ , 3A           | 08SP005  |
| FL1  | 20mH                      | UU9.8    |
| T1   | EI-22                     |          |
| L51  | 2.7 $\mu$ H               |          |

| P/N  | Component Value         | Note      |
|------|-------------------------|-----------|
| C1   | 22 $\mu$ F, 400V        | L-tec     |
| C2   | 10 $\mu$ F, 50V         | L-tec     |
| C3   | 2.2 $\mu$ F, 50V        |           |
| C4   | 1000pF, 1000V, 1206     | Holystone |
| C5   | 0.01 $\mu$ F, 16V, 0805 |           |
| C51  | 1000pF, 50V, 0805       |           |
| C52  | 1000 $\mu$ F, 10V       | L-tec     |
| C54  | 470 $\mu$ F, 10V        | L-tec     |
| C55  | 0.01 $\mu$ F, 16V, 0805 |           |
| CX1  | 0.1 $\mu$ F             | X-cap     |
| CY1  | 2200pF                  | Y-cap     |
| D1A  | 1N4007                  |           |
| D1B  | 1N4007                  |           |
| D1C  | 1N4007                  |           |
| D1D  | 1N4007                  |           |
| D2   | PS102R                  |           |
| D3   | 1N4148                  |           |
| D4   | 1N4007                  |           |
| Q1   | 2N60B                   | 600V/2A   |
| CR51 | SB540                   |           |
| ZD51 | 6V2C                    |           |
| IC1  | LD7535/LD7535A IL       | SOT-26    |
| IC2  | EL817B                  |           |
| IC51 | TL431                   | 1%        |
| F1   | 250V, 1A                |           |
| Z1   | N/A                     |           |

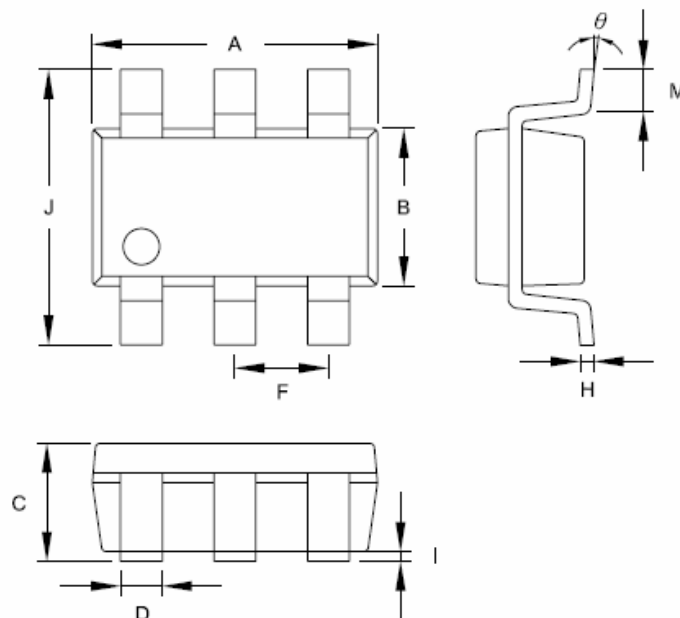
**Package Information**
**SOT-26**


| Symbol | Dimension in Millimeters |       | Dimensions in Inches |       |
|--------|--------------------------|-------|----------------------|-------|
|        | Min                      | Max   | Min                  | Max   |
| A      | 2.692                    | 3.099 | 0.106                | 0.122 |
| B      | 1.397                    | 1.803 | 0.055                | 0.071 |
| C      | -----                    | 1.450 | -----                | 0.058 |
| D      | 0.300                    | 0.550 | 0.012                | 0.022 |
| F      | 0.838                    | 1.041 | 0.033                | 0.041 |
| H      | 0.080                    | 0.254 | 0.003                | 0.010 |
| I      | 0.050                    | 0.150 | 0.002                | 0.006 |
| J      | 2.600                    | 3.000 | 0.102                | 0.118 |
| M      | 0.300                    | 0.600 | 0.012                | 0.024 |
| θ      | 0°                       | 10°   | 0°                   | 10°   |



## Package Information

DIP-8

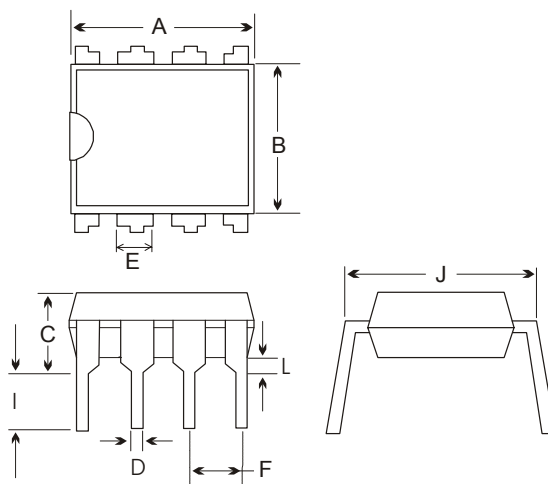

| Symbol | Dimension in Millimeters |        | Dimensions in Inches |       |
|--------|--------------------------|--------|----------------------|-------|
|        | Min                      | Max    | Min                  | Max   |
| A      | 9.017                    | 10.160 | 0.355                | 0.400 |
| B      | 6.096                    | 7.112  | 0.240                | 0.280 |
| C      | -----                    | 5.334  | -----                | 0.210 |
| D      | 0.356                    | 0.584  | 0.014                | 0.023 |
| E      | 1.143                    | 1.778  | 0.045                | 0.070 |
| F      | 2.337                    | 2.743  | 0.092                | 0.108 |
| I      | 2.921                    | 3.556  | 0.115                | 0.140 |
| J      | 7.366                    | 8.255  | 0.290                | 0.325 |
| L      | 0.381                    | -----  | 0.015                | ----- |

## Important Notice

Leadtrend Technology Corp. reserves the right to make changes or corrections to its products at any time without notice. Customers should verify the datasheets are current and complete before placing order.

**Revision History**

| Rev. | Date      | Change Notice                                                                                                                 |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------|
| 00   | 03/01/'06 | Renew from the LD7535 spec. (Rev=0) by adding the LD7535A related descriptions and data. The revision number is reset from 0. |
| 01   | 01/11/07  | Revision: Block Diagram and Characteristic                                                                                    |