



UPS601

LINEAR INTEGRATED CIRCUIT

HIGH PERFORMANCE CURRENT MODE POWER SWITCH

DESCRIPTION

The UTC UPS601 is designed to provide several special enhancements to satisfy the needs: Power-Saving mode for low standby power, Over Current Protection (OCP), Over Voltage Protection (OVP), Over Load Protection (OLP), UVLO, Over Temperature Protection (OTP) etc protection features. IC will be shutdown when either protection arise and can auto-restart.


FEATURES

- * Low startup current 20uA typ
- * Fixed switching frequency(Normal is 70kHz)
- * Max duty cycle 70%
- * Power-saving mode for low power
- * Over temperature protection
- * Overload protection
- * Over voltage protection
- * Leading edge blanking
- * Soft start

ORDERING INFORMATION

Order Number		Package	Packing
Normal	Lead Free Plating		
UPS601-D08-T	UPS601L-D08-T	DIP-8	Tube


<p>UPS601L-D08-T</p> <p>(1)Packing Type (2)Package Type (3)Lead Plating</p>	<p>(1) T: Tube (2) D08: DIP-8 (3) L: Lead Free Plating Blank: Pb/Sn</p>
---	---

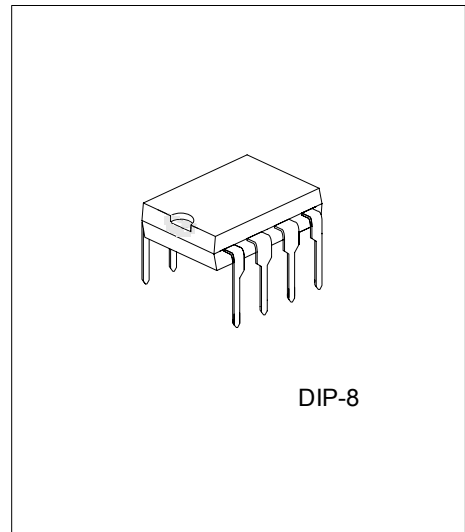

DIP-8

*Pb-free plating product number: UPS601L


■ PIN CONFIGURATION

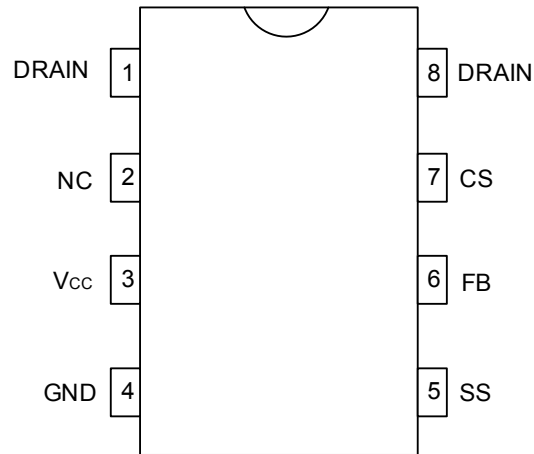

■ PIN DESCRIPTION

PIN	SYMBOL	FUNCTION
1	DRAIN	Power MOSFET drain
2	NC	No connection
3	V _{CC}	Supply voltage
4	GND	Ground
5	SS	Soft-start
6	FB	Feedback
7	CS	Controller current sense input
8	DRAIN	Power MOSFET drain

■ BLOCK DIAGRAM

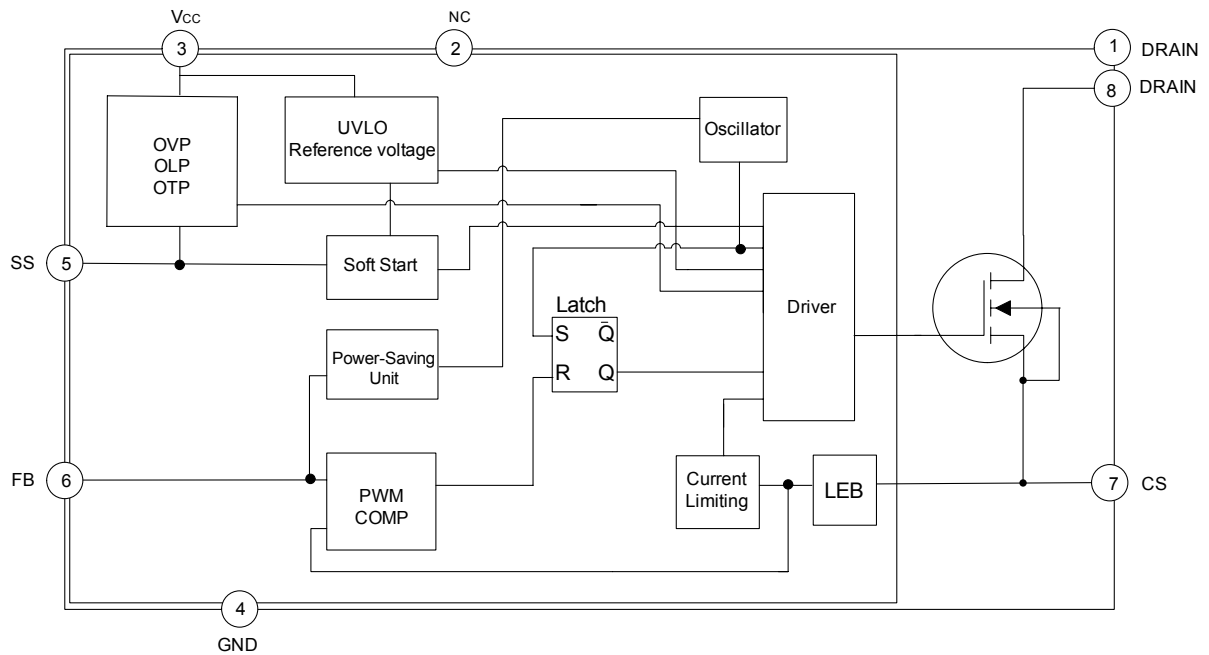

Explain: OLP(Over Load Protection)
 OVP(Over Voltage Protection)
 OTP(Over Temperature Protection)
 UVLO(Under Voltage Latch-Out)
 LEB(Leading Edge Blanking)
 SS(Soft Start)

■ ABSOLUTE MAXIMUM RATINGS (Ta = 25°C, V_{CC}=15V, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	26	V
Input Voltage to FB Pin	V _{FB}	-0.3 ~ 6.2	V
Input Voltage to CS Pin	V _{CS}	-0.3 ~ 2.8	V
Junction Temperature	T _J	+150	°C
Operating Temperature	T _{OPR}	-40 ~ +125	°C
Storage Temperature	T _{STG}	-50 ~ +150	°C

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ OPERATING RANGE

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	8.6 ~ 22	V

■ ELECTRICAL CHARACTERISTICS (Ta = 25°C, V_{CC}=15V, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
SUPPLY SECTION							
Start Up Current	I _{STR}	V _{CC(ON)} - 0.1V		22	45	μA	
Supply Current with switch	OFF	I _{OFF} V _{SS} = 0, I _{FB} = 0		3.7	6.0	mA	
	ON	I _{ON} V _{SS} = 5V, I _{FB} = 0		4.0	7.0	mA	
UNDER-VOLTAGE LOCKOUT SECTION							
Start Threshold Voltage	V _{THD(ON)}		11.8	12.6	13.4	V	
Min. Operating Voltage	V _{CC(MIN)}		7.6	8.1	8.6	V	
Hysteresis	V _{CC(HY)}			4.5		V	
INTERNAL VOLTAGE REFERENCE							
Reference Voltage	V _{REF}	measured at pin V _{FB}	6.1	6.3	6.5	V	
CONTROL SECTION							
Switch Frequency	Normal	F _(SW)	V _{FB} = 4V	61	68	75	kHz
	Power-Saving		V _{FB} = 1V	18	20	23	kHz
Duty Cycle	MAX	D _{MAX}		65	70	75	%
	MIN	D _{MIN}	V _{FB} < 0.5V	0			%
V _{FB} Operating Level	MIN	V _{MIN}		0.5			V
	MAX	V _{MAX}				4.4	V
Feedback Resistor	R _{FB}		2.6	3.8	5.0	kΩ	
Soft-Start Time	T _{SS}	C _{SS} =0.05μF		6			ms
		C _{SS} =0.1μF		12			ms
		C _{SS} =1μF		120			ms
PROTECTION SECTION							
OVP threshold	V _(OVP)	V _{SS} < 3.5V, V _{FB} > 5V	15.2	16	16.8	V	
OLP threshold	V _{FB(OLP)}	V _{SS} > 5.4V	4.4	4.6	4.9	V	
OTP threshold	T _(THR)		120	135	150	°C	
OVP Disable threshold	V _{SS(DEACT)}	V _{FB} > 5V, V _{CC} > 17V	3.7	3.9	4.2	V	
OLP Enable threshold	V _{SS(ACT)}	V _{FB} > 5V	4.9	5.1	5.4	V	
Spike Blanking time	T _{SB}			6.8		μs	
CURRENT LIMITING SECTION							
LEB	t _{LEB}			220		ns	
Peak Current Limitation	V _{CS}			1.0	1.1	V	
POWER MOS-TRANSISTOR SECTION							
Drain-Source Breakdown Voltage	V _{DSS}		600			V	
Static Drain-Source On-State Resistance	R _{DS(ON)}				15	Ω	
Output Capacitance	C _O			56		pF	

■ ELECTRICAL CHARACTERISTICS(Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Rise Time	t_R			21		ns
Fall Time	t_F			24		ns
Turn-Off Delay Time	$t_{d(OFF)}$			30		ns
Drain-Source Diode Continuous Source Current	I_S				1	A

■ FUNCTIONAL DESCRIPTION

The internal reference voltages and bias circuit work at $V_{CC} > 12.6V$, and shutdown at $V_{CC} < 8.1V$.

(1) Soft-Start

When every IC power on, driver output duty cycle will be decided by voltage V_{SS} on soft-start capacitor and V_{CS} on current sense resistor at beginning. After V_{SS} reach 5.1V, the whole soft-start phase end, and driver duty cycle depend on V_{FB} and V_{CS} . The relation among V_{SS} , V_{FB} and V_{OUT} as followed FIG.3, here soft-start phase $T_{soft-start}$ should more than V_{OUT} start-up phase $T_{start-up}$, otherwise, IC will enter false OLP protection state. Because after the soft-start phase end, if V_{OUT} remain in lower voltage, V_{FB} more than 4.6V, then IC enter false OLP state.

Furthermore, soft-start phase should end before V_{CC} reach $V_{CC(MIN)}$ during V_{CC} power on. Otherwise, if soft-start phase remain not end before V_{CC} reach $V_{CC(MIN)}$ during V_{CC} power on, IC will enter auto-restart phase and not set up V_{OUT} .

Finally soft-start also set OVP active phase. OVP active phase between $V_{SS}=0$ and $V_{SS}=3.8V$, OVP will not be sensed after V_{SS} reach 3.8V. The Soft-start phase T_{SS} :

$$T_{SS} = \begin{cases} 6 \text{ ms} & (C_{SS}=0.05\mu F) \\ 12 \text{ ms} & (C_{SS}=0.1\mu F) \\ 120 \text{ ms} & (C_{SS}=1\mu F) \end{cases}$$

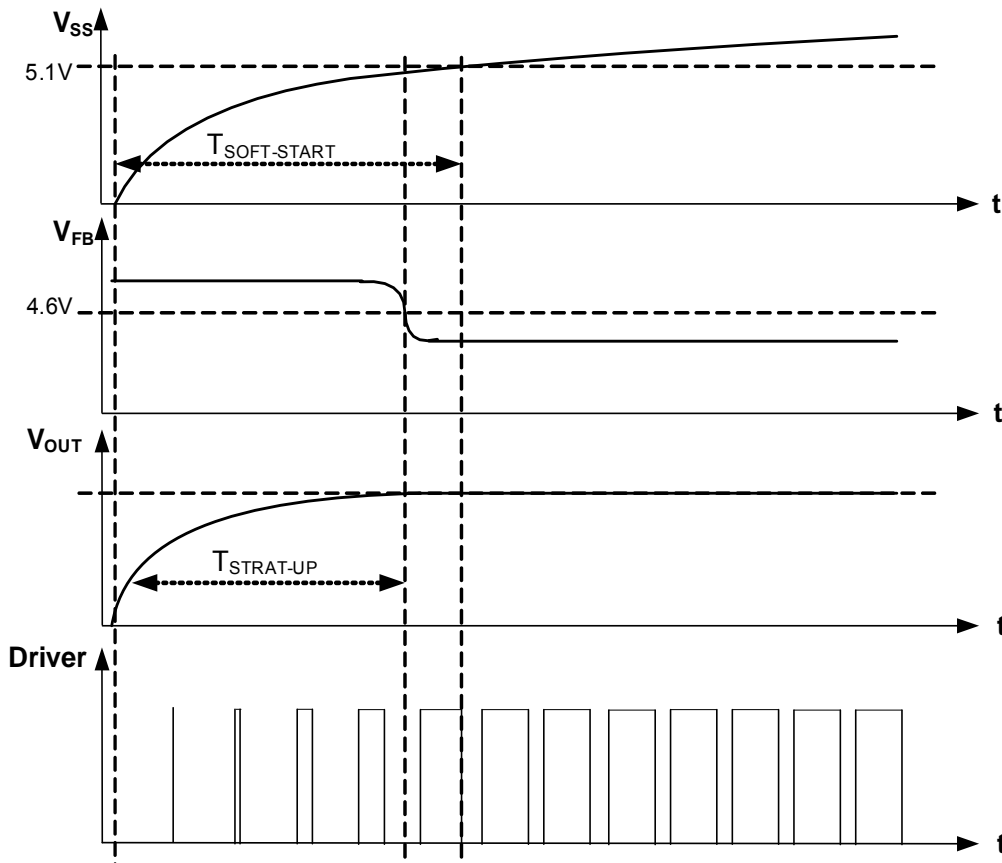


FIG.3 Soft-start phase

FUNCTIONAL DESCRIPTION(Cont.)

(2) Protection section

UPS601 takes on more protection functions such as OLP, OVP and OTP etc. In case of those failure modes for continual 7.2μs (blanking time), the driver is shut down. At the same time, IC enters auto-restart, V_{CC} power on and driver is reset after V_{CC} power on again.

OLP

After soft-start phase end (V_{SS}>5.1V), IC will shutdown driver if over load state occurs (corresponding to V_{FB}>4.6V) for continual 7.2μs. OLP function will not inactive during soft-start phase. OLP case as followed FIG.4. The test circuit as followed FIG.6 for UPS601.

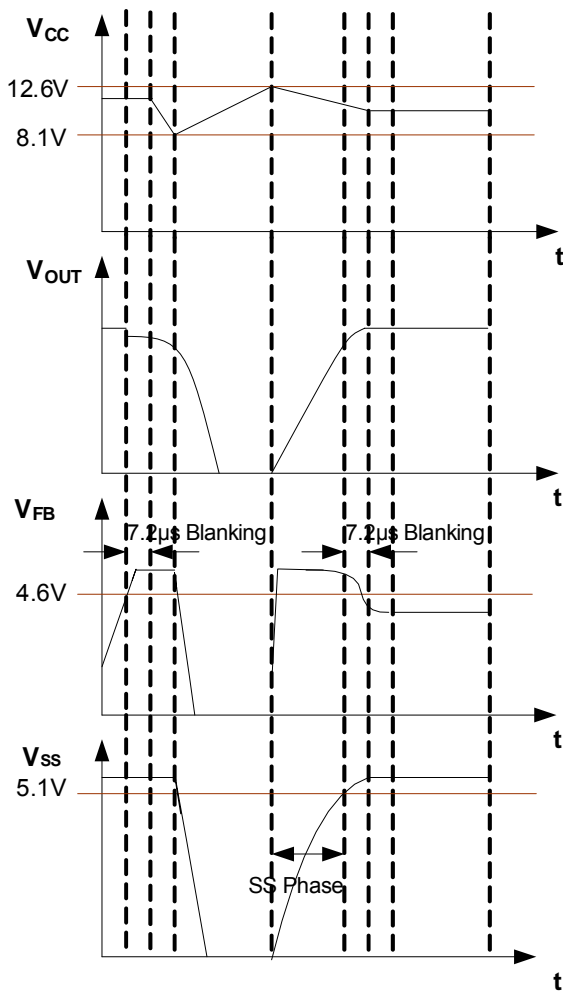


FIG.4 OLP case

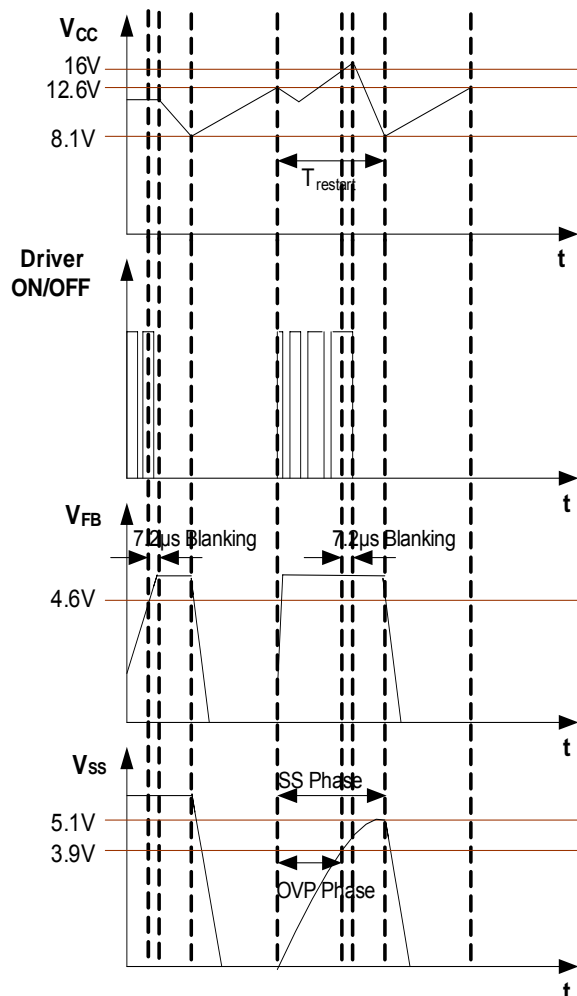


FIG.5 OVP case

OVP

Power supply V_{CC}'s OVP function are enabled only when V_{SS}<3.9 & V_{FB}>4.6V during soft-start phase. During above condition, driver will be shutdown if over voltage state occurs (V_{CC}>16v) for continual 7.2μs. OVP function will not inactive after soft-start phase. OLP case as followed FIG.5. The test circuit as followed FIG.7 for UPS601.

OTP

OTP will shut down driver when junction temperature T_J of internal circuits is more than threshold 135°C for continual 7.2μs.

■ FUNCTIONAL DESCRIPTION(Cont.)

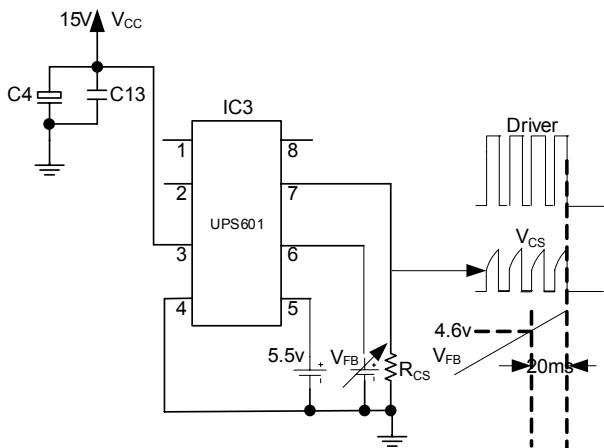


FIG.6 OLP test circuit

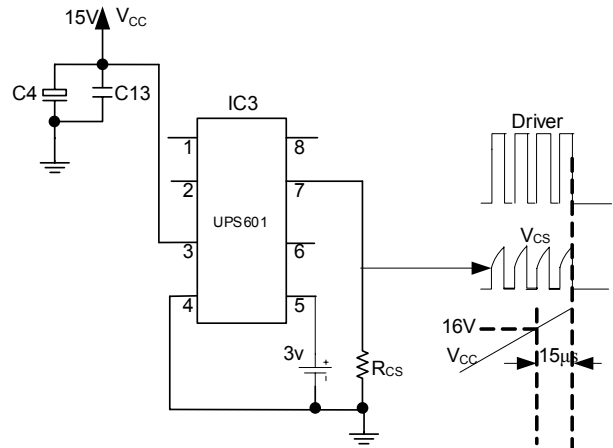


FIG.7 OVP test circuit

(3) Driver Output Section

Rise edge time of driver output is about 200ns for avoiding Low EMI.

(4) Inside power switch MOS transistor

For UPS601, it's inside power MOS transistor may load source current 1A. Specific power MOS transistor parameter is as "POWER MOS TRANSISTOR SECTION" in "electrical characteristics table".

■ TYPICAL APPLICATION CIRCUIT

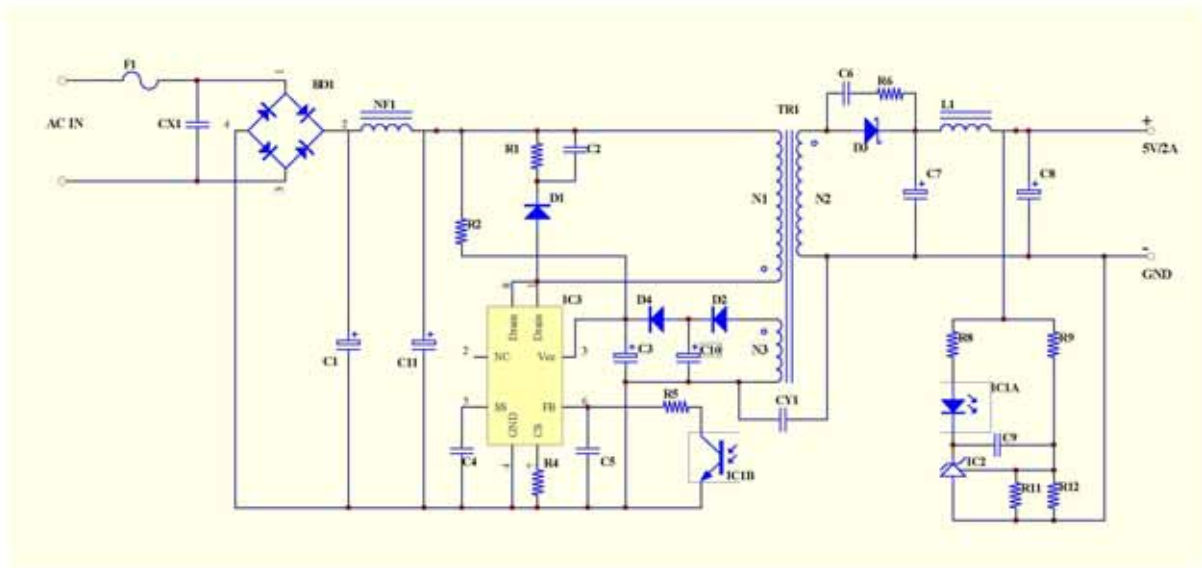


FIG.8 UPS601 Typical Application Circuit

Table1. Components reference description for UPS601 application circuit

DESIGNATOR	PART TYPE	DESIGNATOR	PART TYPE	DESIGNATOR	PART TYPE
C1	10u/400V	R1	200K	BD1	1A/600V
C2	1n/1KV	R2	1.5M	D1	FR107
C3	22u/50V	R4	1.2Ω 1/2W	D2	1N4148
C4	0.1u/50V	R5	10Ω	D3	5A/40V
C5	0.1u/50V	R6	10Ω	D4	1N4148
C6	1n/100V	R8	150Ω	F1	2A/250V
C7	1000u/16V	R9	4.7K	IC1	PC-817C
C8	1000u/16V	R11	4.7K	IC2	UTC431
C9	1u	R12	56K	IC3	UPS601
C10	100u/25V			L1	10uH
C11	10u/400V			NF1	1mH
CX1	0.1u/250V			TR1	NOTE1
CY1	2.2n/250V				

Note1: TR1- EE19 used For 10W
EI22 used For 15W

FULL RANGE(90V _{AC} ~265V _{AC})				220V _{AC}			
10W Transformer				15W Transformer			
EE19				EI22			
5V		12V		5V		12V	
N1:	0.23X115Ts	N1:	0.23X115Ts	N1:	0.3X85Ts	N1:	0.23X85Ts
N2:	0.6X6Ts	N2:	0.6X10Ts	N2:	0.6X5Ts	N2:	0.6X5Ts
N3:	0.23X19Ts	N3:	0.23X13Ts	N3:	0.23X16Ts	N3:	0.23X7Ts
Lp:	1.8mH	Lp:	1.8mH	Lp:	1mH	Lp:	1mH

■ TYPICAL CHARACTERISTICS

Fig 1. Feedback Voltage During Loadjump From 10% Up To 100% Load ($V_{DCIN}=120V$)

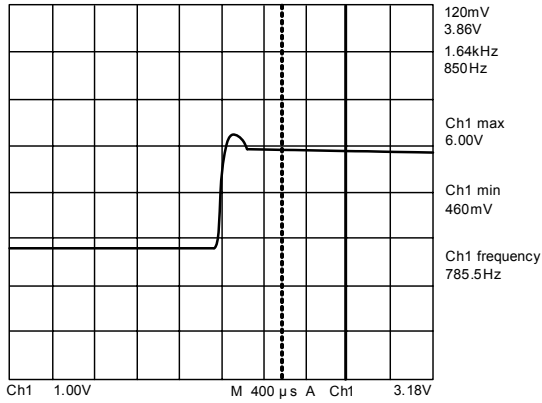


Fig 2. Feedback Voltage During Loadjump From 10% Up To 100% Load ($V_{DCIN}=350V$)

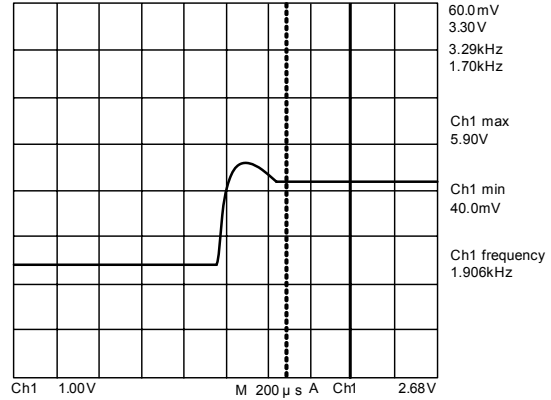


Fig 3. Startup With Full Load Condition At $V_{DCIN}=120V$, V_{c4} and V_{out}

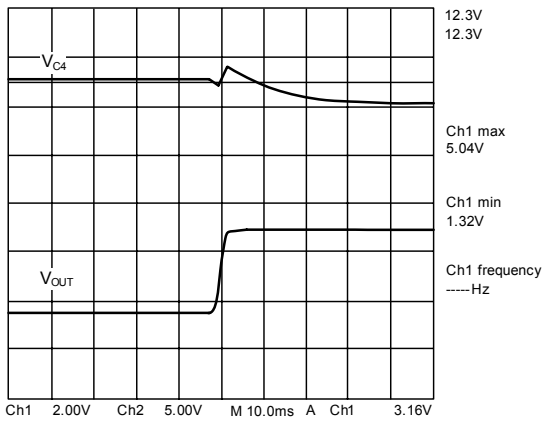


Fig 4. Startup With Full Load Condition At $V_{DCIN}=350V$, V_{c4} and V_{out}

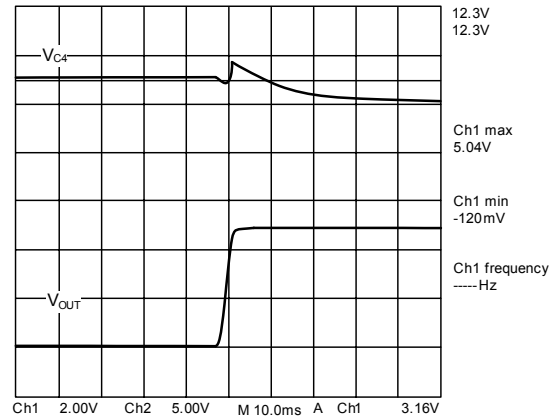


Fig 5. Startup Behavior At Nominal Load Condition $V_{DCIN}=120V$




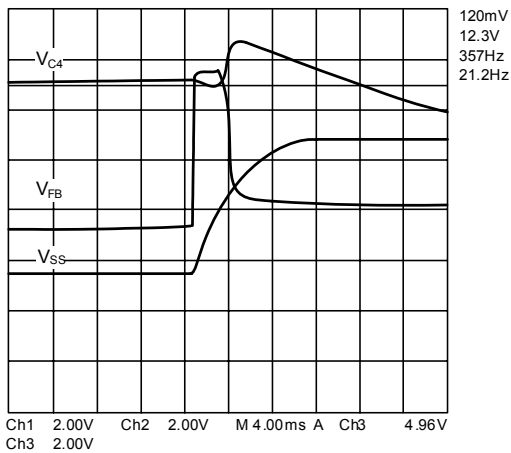


Fig 6. Startup Behavior At Nominal Load Condition $V_{DCIN}=350V$

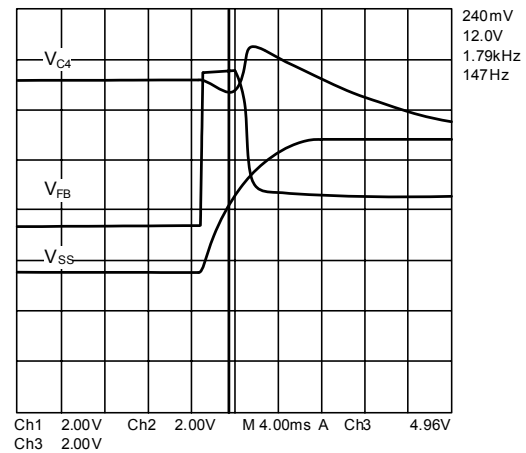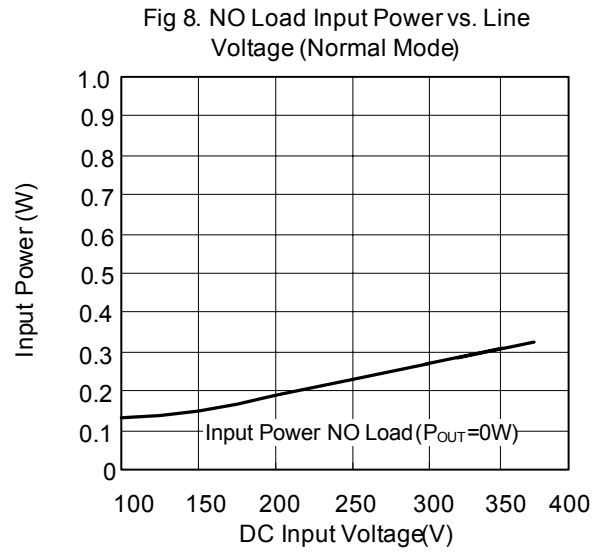

■ TYPICAL CHARACTERISTICS(Cont.)

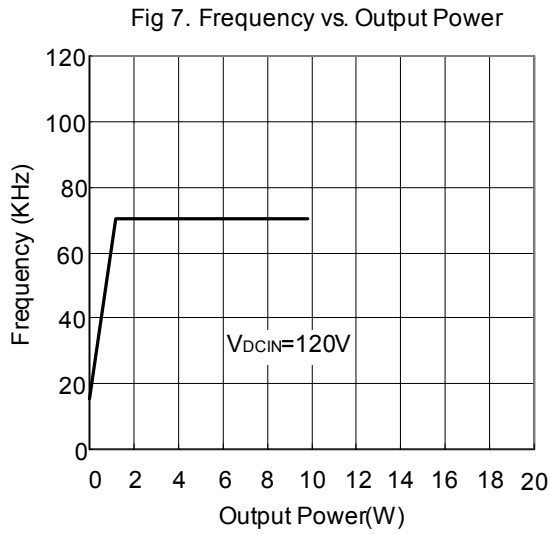

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.