


5-channel Switching Regulator Controller BD9730KV

● Description

The BD9730KV is a 5-channel switching regulator controller IC designed for digital still cameras. This IC can be operated at 2.5V. (Min.). The 5-channel (4 channel for step-down and 1 channel for step-up) switching regulator controllers are integrated into a VQFP48 package. This IC can operate both external Bipolar and FET transistors. A triangle wave oscillator, a reference voltage, PWM comparator, a CMOS type driver, and a short protection circuit are all integrated in this single IC.

● Dimension (Unit : mm)

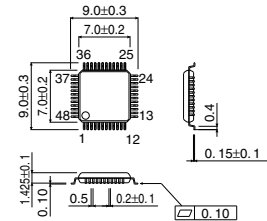

● Features

- 1) Operates at a supply voltage of 2.5V (Min.)
- 2) High-precision reference voltage of $1.0V \pm 1.2\%$
- 3) Can operate both external transistors of FET and Bipolar (Base current can be set by resistance.)
- 4) All channels have dead time control
- 5) Built-in output shutdown circuit (timer latch) when overloaded
- 6) Channels 1 and 5 can externally set the reference voltage
- 7) Channels 1, 4 and 5 can control independently the ON/OFF

VQFP48

● Applications

Digital still camera, portable DVD player, digital movie camera, PDA, W-CDMA

● Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Maximum applied voltage	Vmax	-0.3 ~ +12	V
Power dissipation	Pd	400 ^{*1}	mW
		900 ^{*2}	
Operating temperature range	Topr	-20 ~ +85	°C
Storage temperature range	Tstg	-55 ~ +125	°C

*1 When only IC is used. Derating : 4.0mW/°C for operation above Ta=25°C

*2 PCB (70mmx70mm, t=1.6mm) glass epoxy mounting.
Derating : 9.0mW/°C for operation above Ta=25°C

● Recommended Operating Conditions (Ta=25°C)


Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage ^{*3}	Vcc	2.5	—	11	V
Oscillating frequency	fosc	100	—	700	kHz
Output current	IOUT	—	—	30	mA

*3 REG output voltage is derated when Vcc is less than 2.6V-2.5V.

● Electrical characteristics (Unless otherwise noted; Ta=25°C, Vcc=6V, fosc=0.20MHz, STB1~5=3V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Circuit current at standby	Ist	—	—	10	μA	STB1~5=0V
Circuit current at operating	Icc	—	4.8	9.5	mA	
(Reference voltage)						
Output voltage	Vref	0.988	1.0	1.012	V	Iref=-1mA
(Internal regulator)						
Output voltage REGA	VREGA	2.4	2.5	2.6	V	Ireg=-1mA
(Shutdown at overload)						
CH1~5 threshold voltage	Vsc1~5	0.90	1.0	1.10	V	VSCP1~5=1.5V~0.5V
(Protection circuit)						
SCP pin detection voltage	Vtsc	0.90	1.0	1.10	V	VSCP=0V~1.5V
Triangular oscillator						
Oscillating frequency	fosc1	0.179	0.200	0.221	MHz	RT=24kΩ, CT=220pF
(Output)						
Output voltage "H" at operating	VSATH	Vcc-0.4	Vcc-0.2	—	V	Io=10mA
Output voltage "L" at operating	VSATL	—	0.2	0.4	V	Io=-10mA
Maximum output source current	Iosource	30	—	—	mA	
Maximum output sink current	Iosink	—	—	-30	mA	
(STB1~5)						
STB pin control voltage	Operating	VSTBL	2.0	—	—	V
	Non-operating	VSTBH	-0.3	—	0.3	V

● Application Circuit

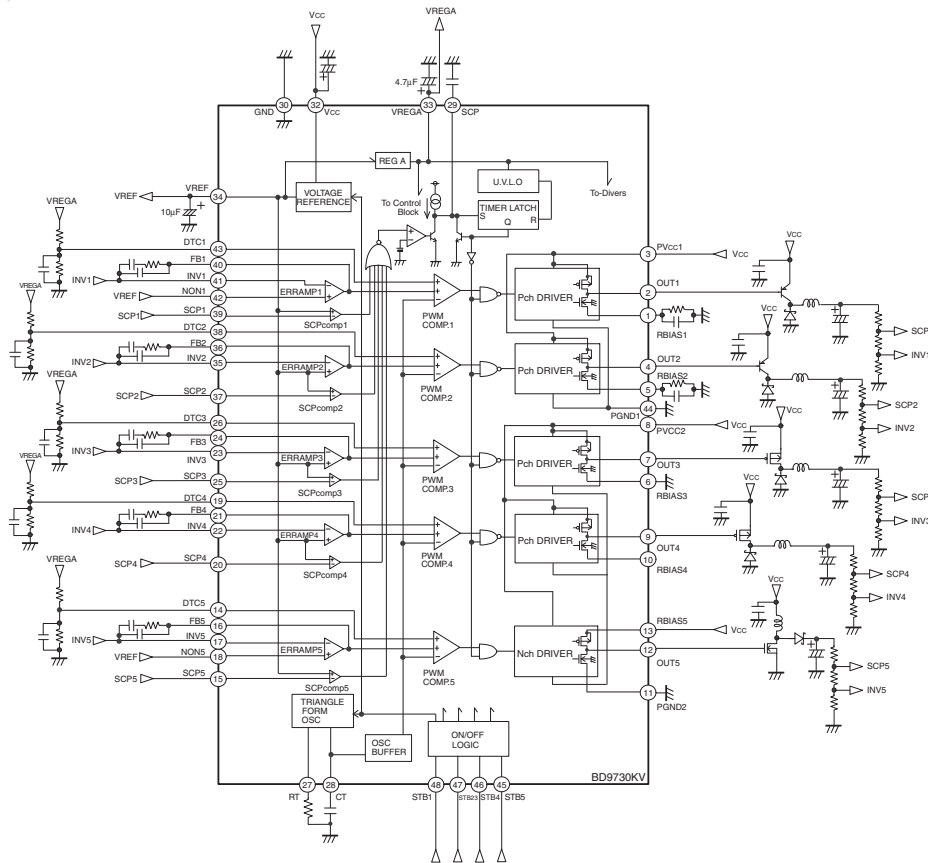

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.