

GENERAL DESCRIPTION


The N3862 is the low cost integrated PWM primary switcher , it combines a current mode PWM controller with a high voltage power MOSFET, specifically designed for use in the low power output , any universal and single input AC / DC converters, DC / DC converters, battery chargers, AC adapters or stand-by switching power supplies.

The N3861 features a burst mode function at light load condition, when output power works at light load and the duty of gate driver is under 1us, the N3860 will enter the burst mode condition to reduce operating frequency , this special function helps decrease power consumption to be Green Mode Requirement .

The N3862 is capable of powers to 18W maximum for a universal line input.

FEATURES

- Low Start-up Current
- Low Operating Supply Current
- Current Mode Control
- 10V~30V Range For VCC Voltage
- Fixed 50KHz Operating Frequency
- Over Power & Short Circuit Protection
- Pulse Output For Driving MOSFET
- Green Mode Requirement
- Burst Mode at Light Load Condition
- Built-in Power MOSFET
- Built-in Resistor of Gate Connection
- Very Low Cost Solution
- DIP-8 package

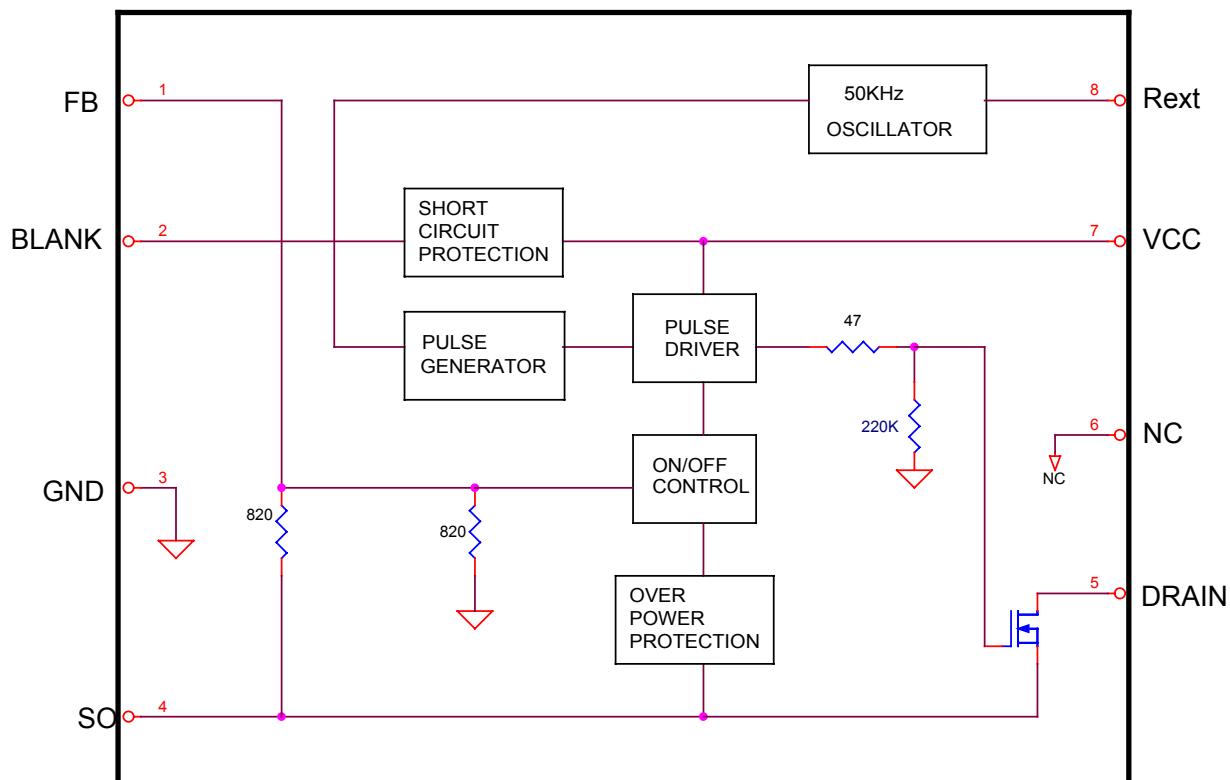BLOCK DIAGRAM

NIKO-SEM
**LOW POWER OFF LINE SMPS
PRIMARY SWITCHER**
**N3862P
DIP-8**
ABSOLUTE MAXIMUM RATINGS

	SYMBOL	LIMITS	UNITS
Power supply voltage	V _{CC}	30	V
Switching Drain-Source Voltage	V _{DS}	-0.3 to 600	V
Continuous Drain Current	I _D	2	A
Source to GND Voltage	V _{SOURCE}	-0.3 to 5	V
Power Dissipation at T _a =50 , SOP / DIP	P _{TOT}	1000 /1200	mW
Junction Temperature	T _j	- 25~ 150	
Storage Temperature	T _{STG}	- 55 ~ 150	
Lead Temperture(Soldering) 10S	T _{LEAD}	300	

THERMAL DATA

PARAMETER	SYMBOL	DIP-8	UNIT
Thermal Resistance Junction to Ambient	θ _{JA}	53	/W
Thermal Resistance Junction to Case	θ _{JC}	23	/W

ELECTRICAL SPECIFICATIONS
(V_{CC} =15V ,T_a = - 25 to 125 ;unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
SUPPLY VOLTAGE SECTION						
Operating Voltage Range	V _{CC}		10	15	30	V
Operating Supply Current	I _{CC}			1.4		mA
Turn-off threshold	V _{CC(th)}	T _a = 25	9	9.5	10	V
OSCILLATOR SECTION						
Frequency Range	f _s		45	50	55	KHz
POWER SECTION						
Drain-Source Voltage	V _{DS}	I _D =1mA	600			V
Off State Drain Current	I _{DSS}	V _{DS} =600V, T _j =25 V _{DS} =600V, T _j =125			0.1 0.3	mA
Drain-Source On State Resistance	R _{DSON}	T _j =25 ,I _D =2A,	-	-	4	Ω
Drain Capacitance		V _{DS} =25V		56		pF
Rise Time	t _r			300		nS
Fall Time	t _f			300		nS
Max.Current Sense Voltage	V _{CS(max)}			1.3		V
Minimum Turn On Time	T _{ONmin}			1		uS


NIKO-SEM

LOW POWER OFF LINE SMPS PRIMARY SWITCHER

N3862P
DIP-8

TYPICAL APPLICATION

N3862P---- OUTPUT<18W

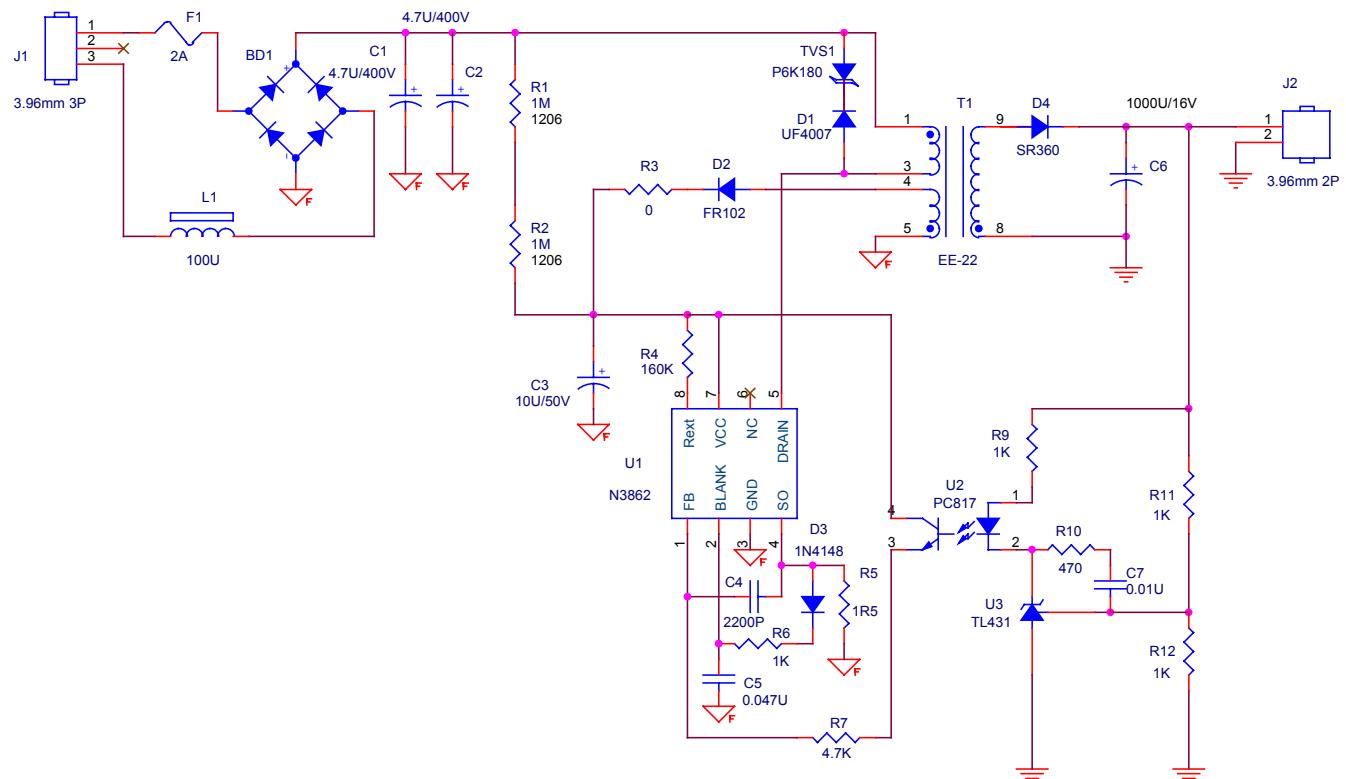


The maximum peak switch current is :

$$I_{PK} = 1.3 / R_s$$

DEVICE SELECTION GUIDE


SnPb	Pb Free
N3862P	N3862PG

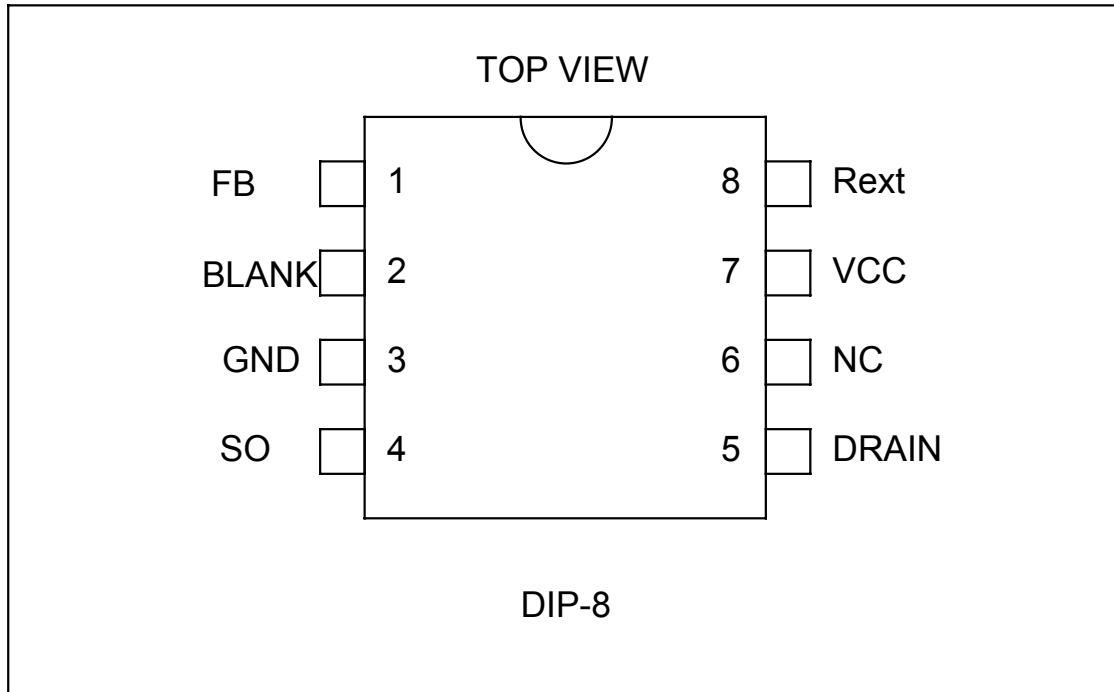NIKO-SEM**LOW POWER OFF LINE SMPS
PRIMARY SWITCHER****N3862P
DIP-8****PIN CONFIGURATION****PIN FUNCTIONS**

NO	FUNCTION	DESCRIPTION
1	FB	Voltage feedback input .
2	BLANK	Set the blanking time to blank the OPP operation when power turn on.
3	GND	Ground , Current return for both the signal and drive circuit .
4	SO	Source of the internal power MOSFET.
5	DRAIN	Drain of the internal power MOSFET.
6	NC	Not connect.
7	VCC	Supply Voltage of this IC .
8	Rext	External resistor,connects 160KΩ resistor to VCC pin(recommend for 1%).

NIKO-SEM**LOW POWER OFF LINE SMPS
PRIMARY SWITCHER****N3862P
DIP-8****SOP-8 (D) MECHANICAL DATA**

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	4.8	4.9	5.0	H	0.5	0.715	0.83
B	3.8	3.9	4.0	I	0.18	0.254	0.25
C	5.8	6.0	6.2	J		0.22	
D	0.38	0.445	0.51	K	0°	4°	8°
E		1.27		L			
F	1.35	1.55	1.75	M			
G	0.1	0.175	0.25	N			

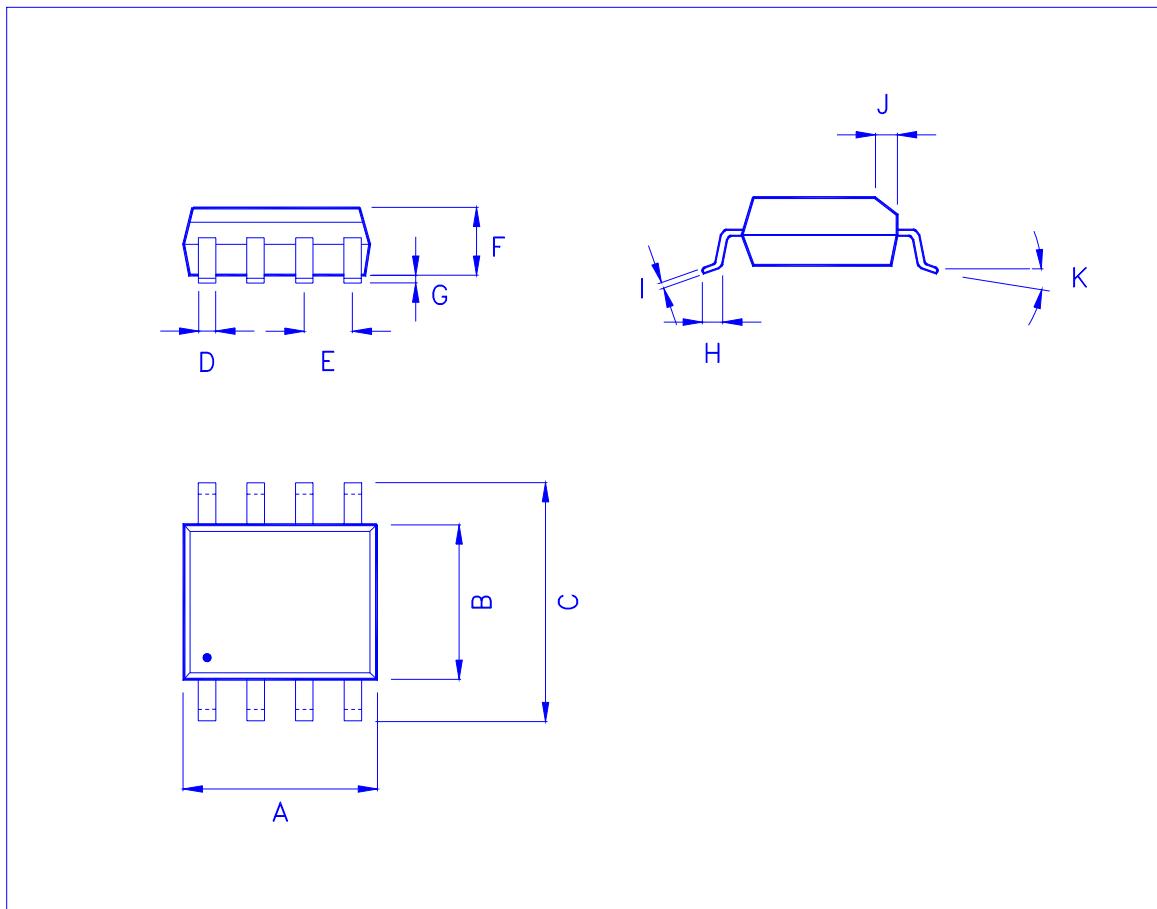

NIKO-SEM**LOW POWER OFF LINE SMPS
PRIMARY SWITCHER****N3862P
DIP-8****DIP-8 MECHANICAL DATA**

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	8.8		9.6	H	7.95		9.75
B	6.2		7.0	I			
C	0.35	0.45	0.55	J			
D		2.54		K			
E	0.5		0.8	L			
F	3.05	3.28	3.56	M			
G	7.48	7.62	8.13	N			

