




**Subminiature Fuses  
Type 172593  
quick-acting F**

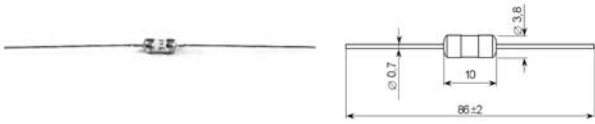

**Standards**

UL 248-14

**Approvals**

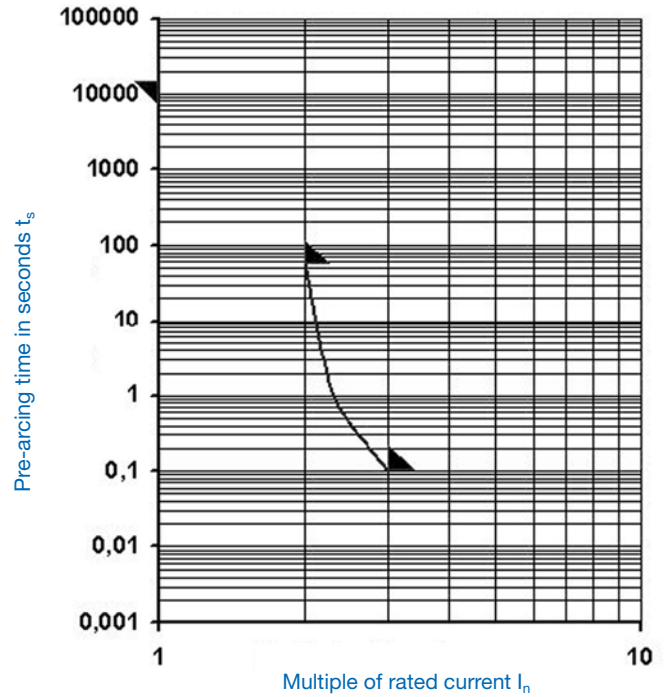

**Pre-arcing time/current characteristic (at T<sub>a</sub> 23 °C)**

Rated current I <sub>n</sub>	n · I <sub>n</sub>		
	1 · I <sub>n</sub>	2 · I <sub>n</sub>	3 · I <sub>n</sub>
Time	t > 4 h	t ≤ 60 s	t ≤ 0,1 s

Order No.	Rated current I <sub>n</sub>		Breaking capacity	Voltage drop		Pre-arcing I <sup>2</sup> t	Approvals
	Rated voltage U <sub>n</sub> /			at I <sub>n</sub>			
				mV		A <sup>2</sup> s	
7010.1740.XX	50	mA / 250 V	50 A / 250 V AC p.f. / cos φ 0,95	1150	0,00011	• • • • • • • • • •	
7010.1750.XX	63	mA / 250 V		735	0,00035		
7010.1760.XX	80	mA / 250 V		950	0,00039		
7010.1770.XX	100	mA / 250 V		875	0,00079		
7010.1780.XX	125	mA / 250 V		870	0,0013		
7010.1790.XX	150	mA / 250 V		545	0,0029		
7010.1910.XX	200	mA / 250 V		520	0,0071		
7010.1920.XX	300	mA / 250 V		920	0,021		
7010.1930.XX	400	mA / 250 V		725	0,057		
7010.1800.XX	500	mA / 250 V		50 A / 125 V DC p.f. / cos φ 0,95	725		0,069
7010.1810.XX	600	mA / 250 V	205		0,059		
7010.1820.XX	800	mA / 250 V	150		0,095		
7010.1830.XX	1	A / 250 V	185		0,12		
7010.1840.XX	1,25	A / 250 V	125		0,29		
7010.1850.XX	1,6	A / 250 V	135		0,48		
7010.1860.XX	2	A / 250 V	110		0,95		
7010.1870.XX	2,5	A / 250 V	145		1,2		
7010.1880.XX	3	A / 250 V	220		1,8		
7010.1890.XX	4	A / 250 V	130		3,4		
7010.1900.XX	5	A / 250 V	300 A / 125 V DC p.f. / cos φ 1	105	7,7	• •	

XX Index for packaging  
Packaging see page 81