

TEST

Test equipment: EMI TEST RECEIVER(05-556)/AMH(05-557)

EUT:

Manufacturer:

Operating Condition: Temperature: C; Moisture: %

Test Site: Qingdao Supervision&Inspection Institute of Product Quality

Operator:


Test Specification: Mains: V, 50Hz; Wooden Table: m ; EUT Operating condition

Comment: Terminal:

Start of Test: 1/17/05 / 4:28:05PM

SCAN TABLE: "55014 Voltjydg-2"

Short Description:	EN 55014 Voltage					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	1.6 %	QuasiPeak	100.0 ms	9 kHz	ESH3-Z5
Average						
500.0 kHz	5.0 MHz	3.1 %	QuasiPeak	50.0 ms	9 kHz	ESH3-Z5

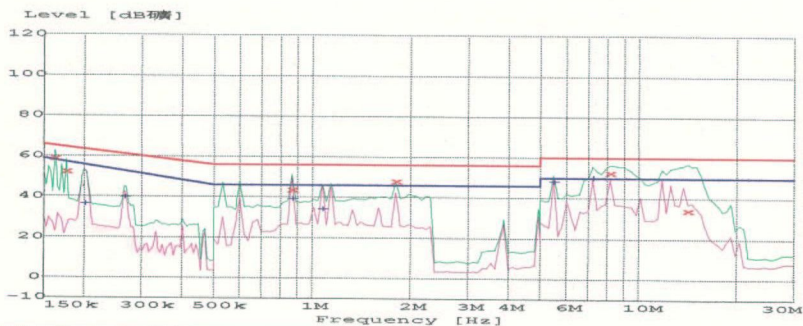

MEASUREMENT RESULT: "vol_jydg_fin QP"

1/17/05 4:38PM

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.162390	58.90	9.8	65	6.4	L1	GND
0.175804	52.40	9.8	65	12.3	L1	GND
0.866216	43.60	9.7	56	12.4	L1	GND
1.802328	48.00	10.0	56	8.0	L1	GND
8.149081	52.60	10.2	60	7.4	L1	GND
14.117722	34.10	10.4	60	25.9	L1	GND

MEASUREMENT RESULT: "vol_jydg_fin AV"

1/17/05 4:38PM

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.199608	36.50	9.8	56	19.4	L1	GND
0.265622	39.90	9.8	53	12.9	L1	GND
0.866216	39.30	9.7	46	6.7	L1	GND
1.072597	34.20	9.7	46	11.8	L1	GND
5.479564	48.30	10.0	50	1.7	L1	GND
7.212303	50.20	10.1	50	-0.2	L1	GND