



LC1920 WIDE RANGE, LINEAR LED DRIVER

DESCRIPTION

The LEADCHIP LC1920 is a high-voltage adjustable current source with accurate temperature compensation. The device is designed to provide a constant current source determined by an external sense resistor R_{sense} . The current is regulated with less than 10% error while input changes from 5V to 90V. With an external resistor (R1 in Figure 1) between VA and IS pin, the heat in the IC can be significantly reduced while keeping the summation of IC and R1 current to be constant. This is extremely useful in the area that power lines are not very stable. A typical application for the LC1920 is to drive LEDs with a constant current set by R_{sense} . They can also be used in parallel to provide higher current according to the bias. This device is available in TO-92, SOT89-3 and SOT-223 package.


FEATURES

- Wide operation range: from 5V to 90V(V_A to V_B)
- I_{LED} can be programmed via changing R_{sense}
- Power dissipation can be adjusted
- Easy to use, only 3 pins and very little external components are needed
- Can be paralleled for higher current
- Temperature compensated

APPLICATIONS

- Industrial lamp indicators
- LED driver
- Accent lighting
- Automotive
- Constant current source
- Constant current sink

TYPICAL APPLICATION CIRCUIT

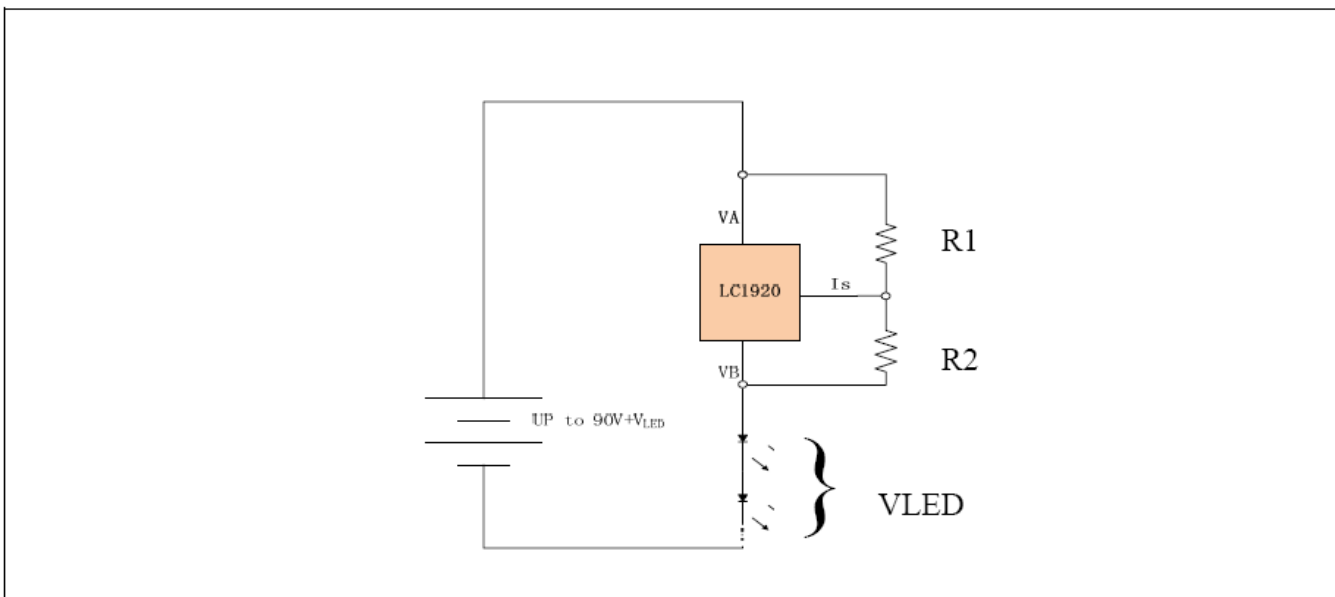






MARKING INFORMATION

Marking information		
Marking	Description	
1920 LLBYW	1920	Product code
	LL	Lot NO.
	B	FAB code
	Y	Date Code: Year
	W	Date Code: Week

ORDERING INFORMATION

LC1920 [1][2][3]	
Code	Description
[1]	Temperature & Rohs: C: -40~85°C,Pb Free Rohs Std.
[2]	Package type: H: TO-92 C3: SOT-89-3 L : SOT-223
[3]	Packing type: BG: Bag (TO-92) TR: Tape & Reel(standard)

PIN CONFIGURATION

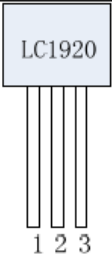Ordering Information		PIN Description	
Package	TO-92		1: IS 2: VB 3: VA
Product code	LC1920C HBG		
Package	SOT-89-3		1: VA 2: VB 3: IS
Product code	LC1920C C3TR		
Package	SOT-223		1: VA 2: VB 3: IS
Product code	LC1920C LTR		

ABSOLUTE MAXIMUM RATING


Name	Symbol	Value	Unit
Max Supply Voltage	V_{A-B}	90	V
Thermal resistance	θ_{JA}	TO-92	170
		SOT-223	70
		SOT-89-3	80
Maximum Junction temperature	T_J	150	°C
Storage temperature	T_{st}	-55 to 150	°C

ELECTRICAL CHARACTERISTICS

Symbol	Item	Conditions	Min	Typ	Max	Unit
V_{A-B}	Operating Input Voltage		5		90	V
I_{A-B}	Current regulation	$V_{A-B}=5-90V,$ $I_{SET}=20mA$	-10		+10	%
V_{IS}	Current sense voltage			0.66		V
T_J	Operating junction temperature		-45		125	°C



BLOCK DIAGRAM

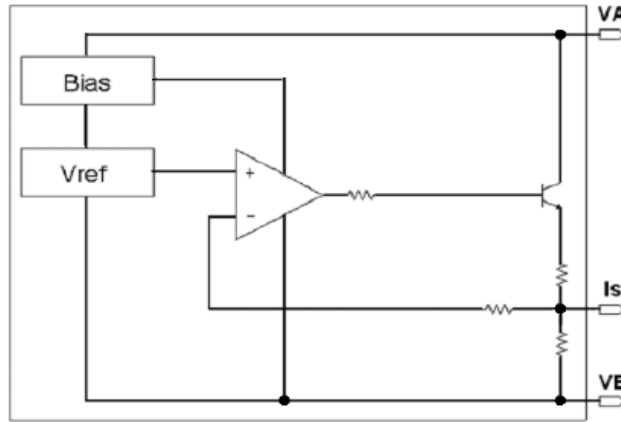

OPERATION

The LC1920 is a high voltage integrated constant current driver. It can operate in a wide range from 5V to 90V, and the output current can be programmed just by change the sense resistor. This module provides a precise regulated output current, the typical application is showed in figure 1.

As the LC1920 is a linear power supply, with high input voltage, the power dissipation should be considered. For example, if the set current is 20mA, when the V_{A-B} is 5V, the module dissipation

$$P_D = V_{A-B} \times I_{SET} \Rightarrow P_D = 0.1W$$

If the V_{A-B} is 90V, the power dissipation is as high as 1.8W. An external resistor R1 can be added to reduce the power dissipation of the LC1920. Then the power dissipation on the IC becomes

$$P_D \cong V_{A-B} \times \left(I_{SET} - \frac{V_{A-B} - V_{Sense}}{R_1} \right)$$

When the ambient temperature is fixed, from thermal resistance value, the maximum power dissipation of the IC can be calculated. Say the maximum allowed temperature increase is 50°C, with TO-92 package (170°C/W thermal resistance), the maximum allowed power dissipation is 0.29W. Assume the maximum V_{A-B} is 50V, $I_{set} = 20mA$, and $V_{sense} = 0.66V$. Then

$$R_1 = (V_{A-B} - V_{sense}) / \left(I_{SET} - \frac{P_D}{V_{A-B}} \right) = 3.5k\Omega$$

R1's power requirement can be calculated by

$$P_{R_1} \cong \frac{V_{A-B}^2}{R_1} = 0.71W$$

Rsense can be calculated from sense voltage and current set:

$$R_{sense} = \frac{V_{IS}}{I_{SET}} = 33\Omega$$

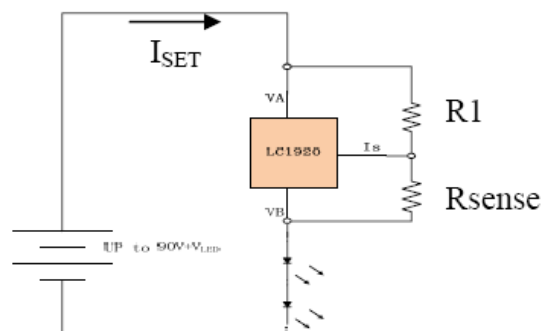



Figure1




PERFORMANCE CHARACTERISTICS

(All the test done at $I_{SET}=20\text{mA}$)

Output current VS V_{A-B}



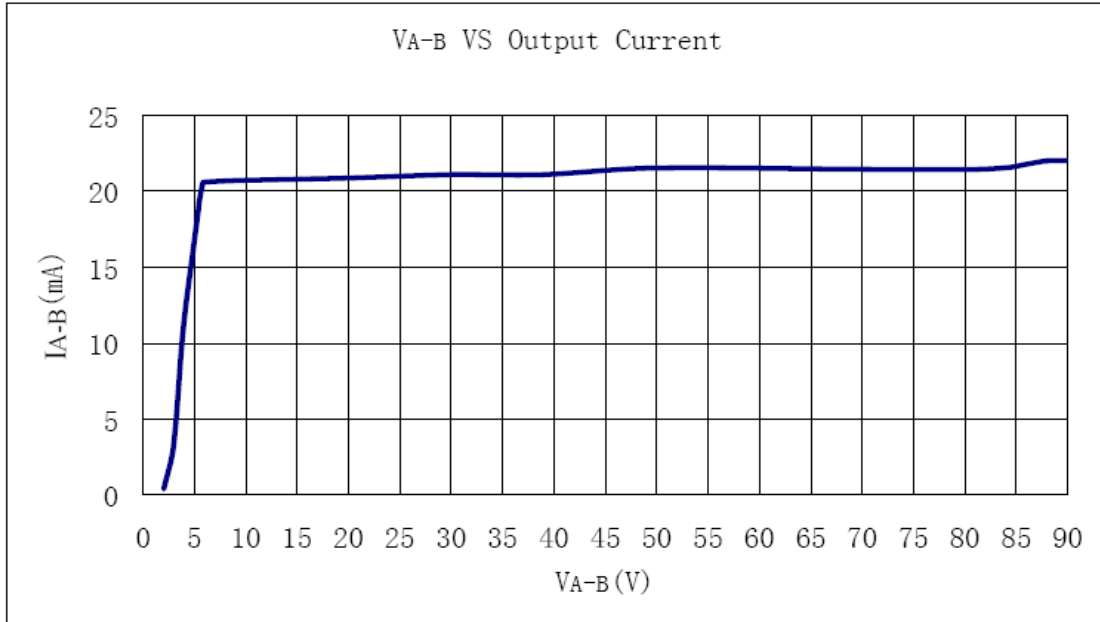


Temperature characteristics

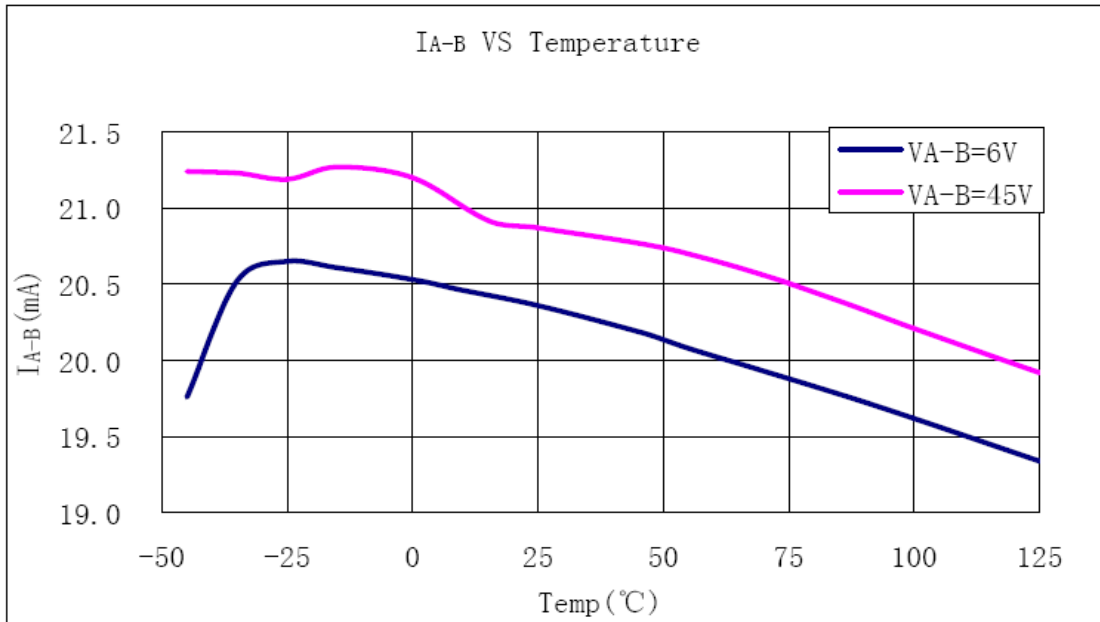



APPLICATION CIRCUITS

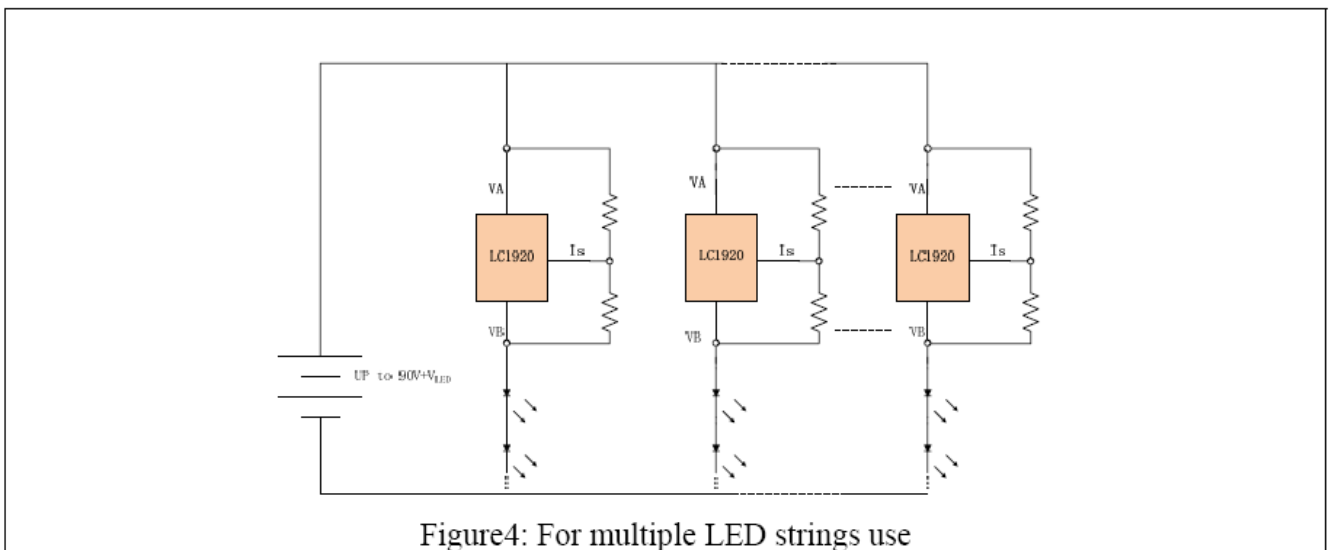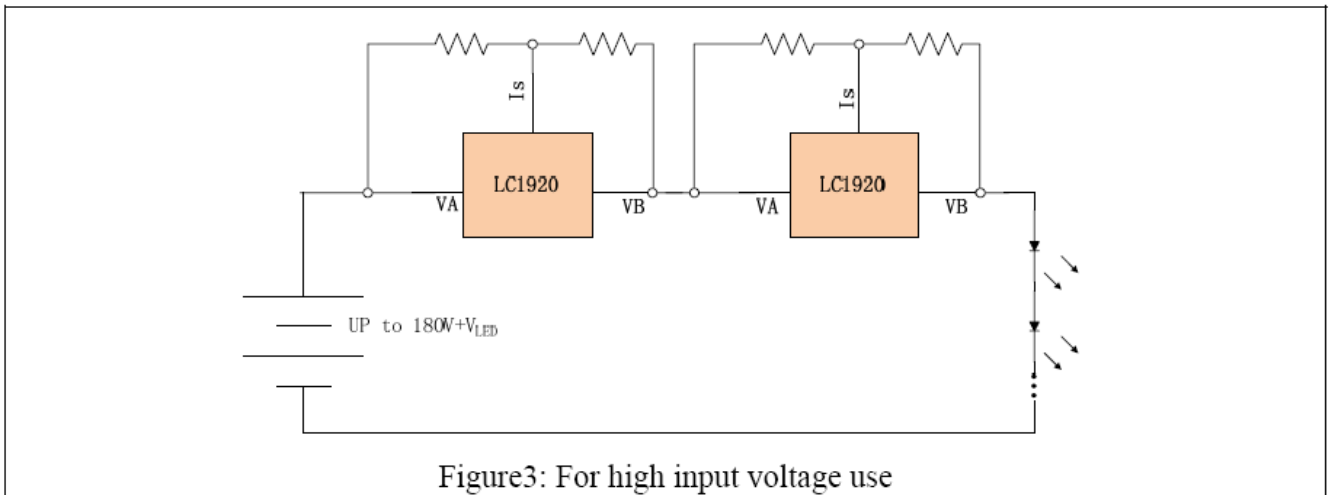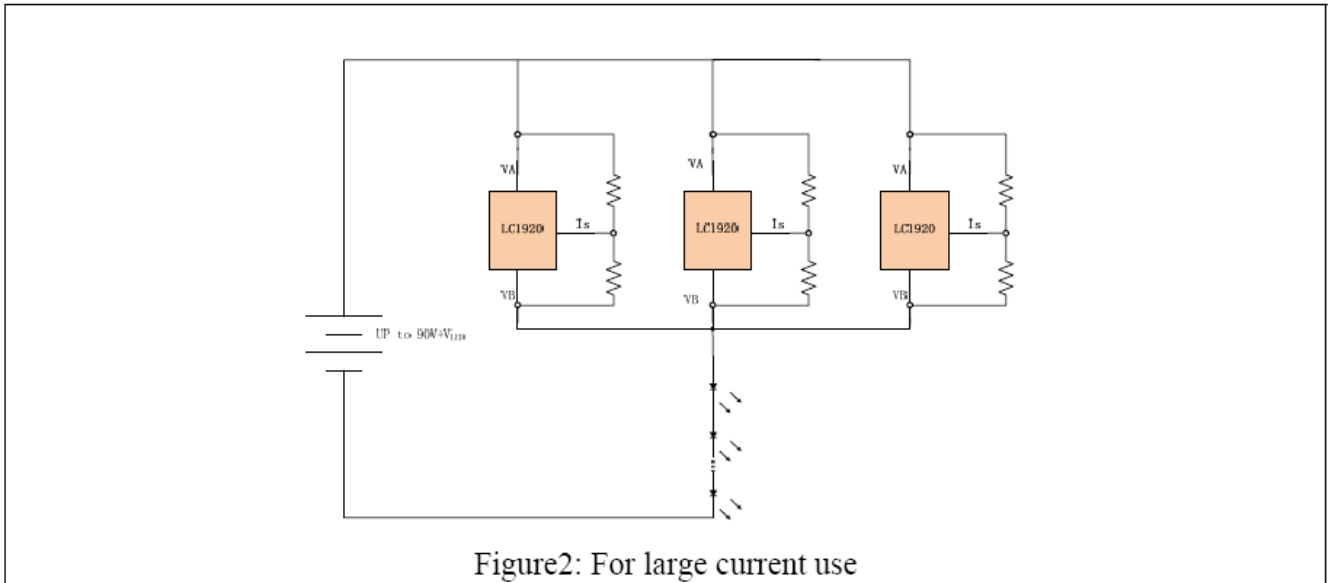



PACKAGE INFORMATION

Package	TO-92	Devices per bag	3000Pcs	Unit	mm
Package dimension: <div style="text-align: center;"> <p> Top view dimensions: 2.54, 3.5±0.1, 1.25±0.1, 0.38, Φ1.5×0.2 Side view dimensions: Φ4.5±0.1, 4.95±0.35, 0.46, 1.5, 0.5, 14.3±0.1, 0.38 Front view dimensions: 0.38 </p> </div>					

Package	SOT-89-3	Devices per reel	1000Pcs	Unit	mm
Package dimension: <div style="text-align: center;"> <p> Top view dimensions: 4.5±0.1, 1.6±0.2, 0.4, 2.5±0.1, 4.25MAX., 0.8 MIN., Ø1.0 Side view dimensions: 1.5±0.1, 0.4±0.1, 0.4±0.1 Bottom view dimensions: 0.42±0.2, 0.47±0.1, 0.42±0.2, 1.5±0.1, 1.5±0.1 </p> </div>					



深圳市凯利恩(佳联)电子有限公司 SZ Calen Electronic Co.,Ltd.

TEL:0755-27932311,27932985 Fax:0755-29668272 www.calentech.com

ADD:Room405, KingMangTang Building, LiuTang Road, No.80 district, BaoAn ShenZhen City, China

Package	SOT223	Devices per reel	2500Pcs	Unit	mm
Package dimension:					
<p>The technical drawing illustrates the SOT223 package dimensions in millimeters. It includes three views: a top view, a side view, and a perspective view. The top view shows a central rectangular body with a width of 6.50 ± 0.20 mm and a height of 7.00 ± 0.30 mm. A narrower top section has a width of 3.00 ± 0.15 mm and a height of 3.50 ± 0.20 mm. The distance from the left edge to the center of the top section is 2.30 ± 0.10 mm, and the distance from the right edge to the center is 0.71 ± 0.10 mm. The side view shows a thickness of 0.25 mm and a lead height of 0.90 ± 0.15 mm. The lead width is 0.30 ± 0.05 mm, with a radius of $R0.15 \pm 0$. The lead angle is $12^\circ \pm 2^\circ$. The perspective view shows a lead angle of $11^\circ \pm 2^\circ$ and a lead height of 0.05 ± 0.04 mm. The lead angle is also indicated as $12^\circ \pm 2^\circ$ and $6^\circ \pm 3^\circ$.</p>					