


(a)

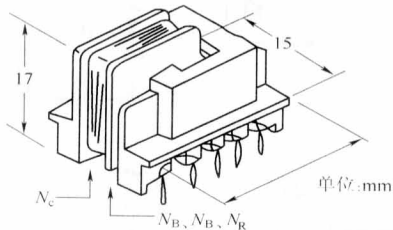

$\phi 0.2\text{mm}$ } \rightarrow $\begin{cases} N_B=5\text{T} \\ N_R=1\text{T} \end{cases}$
 (TEX-E)
 $\phi 60\mu\text{m}$ \rightarrow $N_c=1000$

铁氧体磁心 \rightarrow BH-2 材料

$G_{\text{ap}} \rightarrow 25\mu\text{m}$
 $L_B = 10 \sim 1\mu\text{H}$
 $I_c = 0 \sim 20\text{mA}$

(b)

图 3-68 自激式开关频率控制方式的复谐振变换器

(a) 电路结构; (b) PRT 结构