

Version 1.0 , Aug 2004

# Datasheet

DS-CoreControl-TDA21107

TDA21107

Authors: Edward Chang

Published by Infineon Technologies AG

<http://www.infineon.com/DCDC>

**Power Management & Supply**



Never stop thinking.



## Contents:

Features.....	3
Application.....	3
Pinout Drawing and Description.....	3
General Description.....	4
Block Diagram.....	4
Application Circuit.....	5
Absolute Maximum Rating.....	6
Thermal Characteristic.....	7
Operation Condition.....	7
Electrical Characteristic.....	8
Outline Dimension.....	9
Revision Histroy.....	10
Sales Office Worldwide.....	11

## High speed Driver with bootstrapping for dual Power MOSFETs



P-DSO-8

### Features :


- Fast rise and fall times for frequencies up to 1 MHz
- Adjustable High Side MOSFET gate drive voltage via external voltage supply to BOOT for optimizing ON losses and gate drive losses ( 5V to 12V is recommended )
- Prevents from cross-conducting by adaptive gate drive control
- Supports shut-down mode for very low quiescent current through three-state input
- Compatible to standard PWM controller ICs (IFX, Intersil, Analog Devices, Richtek)
- Floating High Side MOSFET drive
- Power-on Overvoltage Protection
- Footprint compatible to ADP3418
- Ideal for multi-phase Desktop CPU supplies on motherboards and VRM's

### Application :

- Voltage Regulator Modules
- Low Output Voltage High Output Current DC-DC Converters
- Half-Bridge Class D Amplifier

Type	Package	Marking	Ordering Code
TDA21107	P-DSOP-8	21107	Q67042-S4251

### Pinout Drawing and Description :

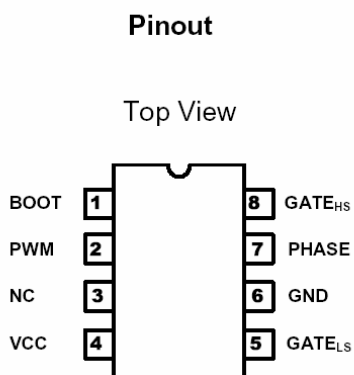

Number	Name	Description
1	BOOT	Floating bootstrap pin. To be connected to the external bootstrap capacitor to generate the gate drive voltage for the high side N-Channel MOSFET
2	PWM	Input for the PWM signal from controller
3	NC	No Connection
4	VCC	Supply voltage
5	GATE <sub>LS</sub>	Gate drive output for the N-Channel Low Side MOSFET
6	GND	Ground
7	PHASE	To be connected to the junction of the High Side and the Low Side MOSFET
8	GATE <sub>HS</sub>	Gate drive output for the N-Channel High side MOSFET


## General Description

The dual high speed driver is designed to drive a wide range of N-Channel low side and N-Channel high side MOSFETs with varying gate charges. It has a small propagation delay from PWM input pin to GATE<sub>HS</sub> and GATE<sub>LS</sub>, short rise and fall times and the same pin configuration as the ADP3418. In addition it provides several protection features as well as a shut down mode for efficiency reasons.


## Target application

The dual high speed driver is designed to work well in half-bridge type circuits where dual N-Channel MOSFETs are utilized. A circuit designer can fully take advantage of the driver's capabilities in high-efficiency, high-density synchronous DC/DC converters that operate at high switching frequencies, e.g. in multi-phase converters for CPU supplies on motherboards and VRM's but also in motor drive and half bridge class-D amplifier type applications.

## Block Diagram

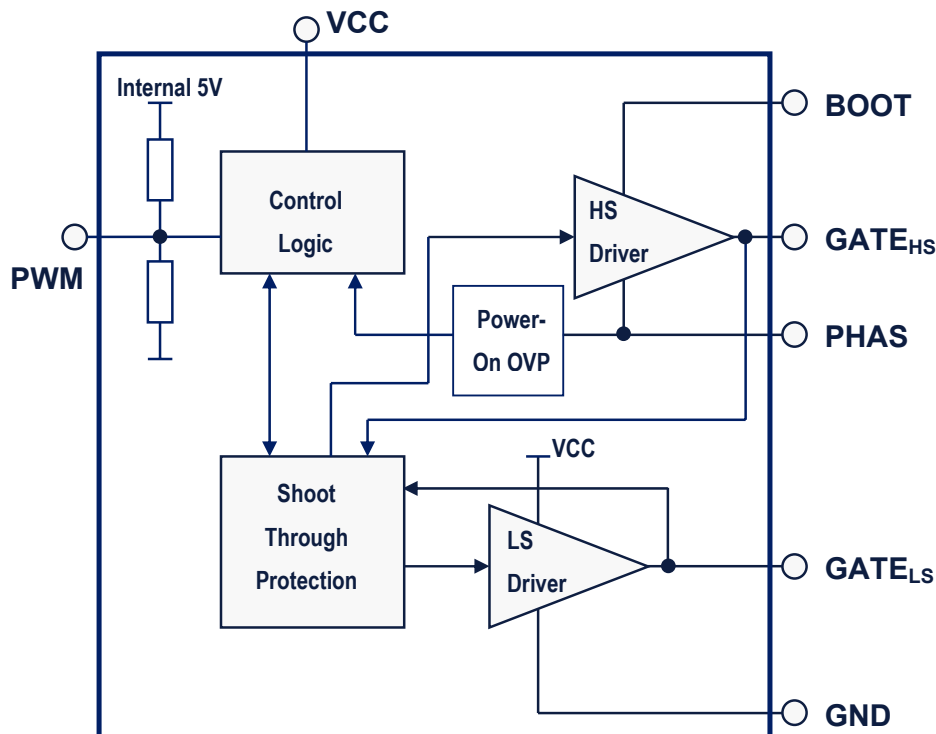

# Application Circuit

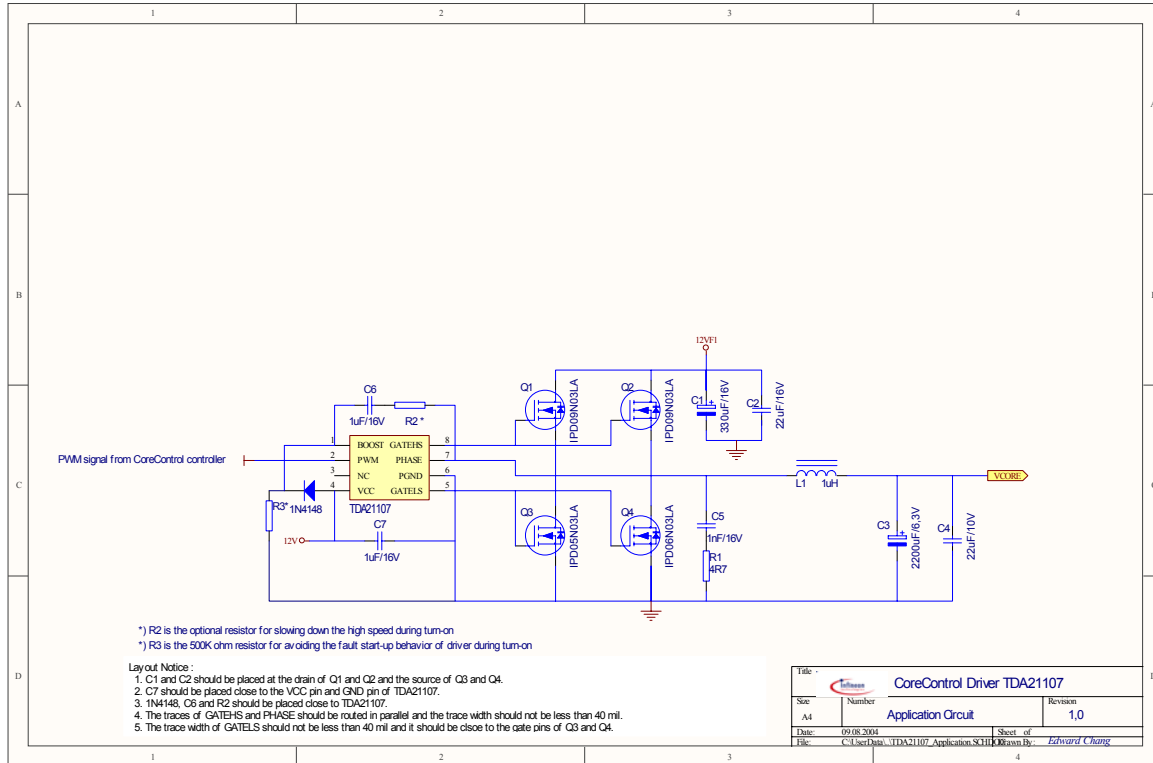

## Absolute Maximum Ratings

At  $T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Value		Unit
		Min	MAX	
Voltage supplied to 'VCC' pin; DC	$V_{VCC}$	-0,3	15	V
Voltage supplied to 'PWM' pin	$V_{PWM}$	-0,3	7	
Voltage supplied to 'BOOT' pin referenced to 'PHASE'	$V_{BOOT} - V_{PHASE}$	-0,3	15	
Voltage supplied to 'BOOT' pin referenced to 'GND'	$V_{BOOT}$	-0,3	30	
Voltage rating at 'PHASE' pin,	$V_{PHASE}$	-4	15	
Voltage supplied to $GATE_{HS}$ pin referenced to 'PHASE'	$V_{GATEHS}$	$V_{PHASE}$ - 0,3	$V_{BOOT}$ +0,3	
Voltage supplied to $GATE_{LS}$ pin referenced to 'GND'	$V_{GATELS}$	-0,3	$V_{VCC}$ +0,3	
Junction temperature	$T_J$	0	125	°C
Storage temperature	$T_S$	-40	150	
Lead temperature ( Soldering, 10 seconds )			260	
ESD Rating; Human Body Model			2	KV
Machine Mode			200	V
IEC climatic category; DIN EN 60068-1	55/150/56			

## Thermal Characteristic

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Thermal resistance, junction-soldering point			90		K/W
Thermal resistance, junction-ambient			125		

## Operating Conditions

At  $T_J = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Voltage supplied to 'VCC' pins	$V_{VCC}$		10,8	12,0	13,2	V
Input signal transition frequency	f		50		500	KHz
Power dissipation	$P_{TOT}$	$T_A = 25\text{ °C}, T_J = 125\text{ °C}$		0,8		W
Junction temperature	$T_J$		0		125	°C
Ambient temperature	$T_A$		0		70	°C

## Electrical Characteristic

At T<sub>j</sub> = 25 °C, unless otherwise specified


Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
<b>Supply Characteristic</b>						
VCC supply current	I <sub>VCC</sub>	V <sub>VCC</sub> = 12 V V <sub>PWM</sub> = 0V		5	7	mA
Under-voltage lockout		V <sub>VCC</sub> rising threshold	8,6	9,4	10,2	V
Under-voltage lockout		V <sub>VCC</sub> falling threshold	7,25	8,05	8,85	
<b>Input Characteristic</b>						
Current in 'PWM' pin	I <sub>PWM_L</sub>	V <sub>PWM</sub> = 0 V	-80	-110	-140	μA
Current in 'PWM' pin	I <sub>PWM_H</sub>	V <sub>PWM</sub> = 5 V	80	110	140	
PWM pin open	V <sub>PWM_O</sub>		2,2	2,5	2,8	V
PWM Low level	V <sub>PWM_L</sub>		1,2	1,4	1,5	
PWM High level	V <sub>PWM_H</sub>		3,0	3,5	3,8	



At  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Dynamic Characteristic						
Turn-on propagation Delay High Side	$t_{d(ON\_HS)}$	$P_{PVCC} = V_{VCC} = 12\text{ V}$ $C_{ISS} = 3000\text{ pF}$		40		ns
Turn-off propagation delay High Side	$t_{d(OFF\_HS)}$					
Rise time High Side	$t_{r\_HS}$			30		
Fall time High Side	$t_{f\_HS}$			40		
Turn-on propagation Delay Low Side	$t_{d(ON\_LS)}$			35		
Turn-off propagation delay Low Side	$t_{d(OFF\_LS)}$					
Rise time Low Side	$t_{r\_LS}$			30		
Fall time Low Side	$t_{f\_LS}$			30		


### Timing diagram

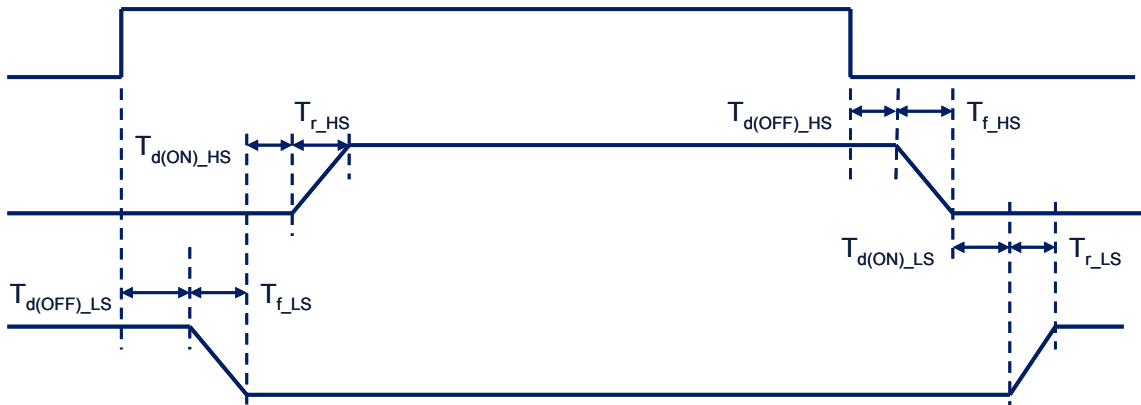

At  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Parameter	Conditions	Values			Unit	
		Min.	Typ.	Max.		
<b>Output Characteristic High Side (HS) and Low Side (LS), ensured by design</b>						
Output Resistance	HS; Source	$V_{VCC} = 12\text{ V}$		2		$\Omega$
	HS; Sink			1,5		
	LS; Source			1,6		
	LS; Sink			1,2		


## Package Drawing P-DSO-8

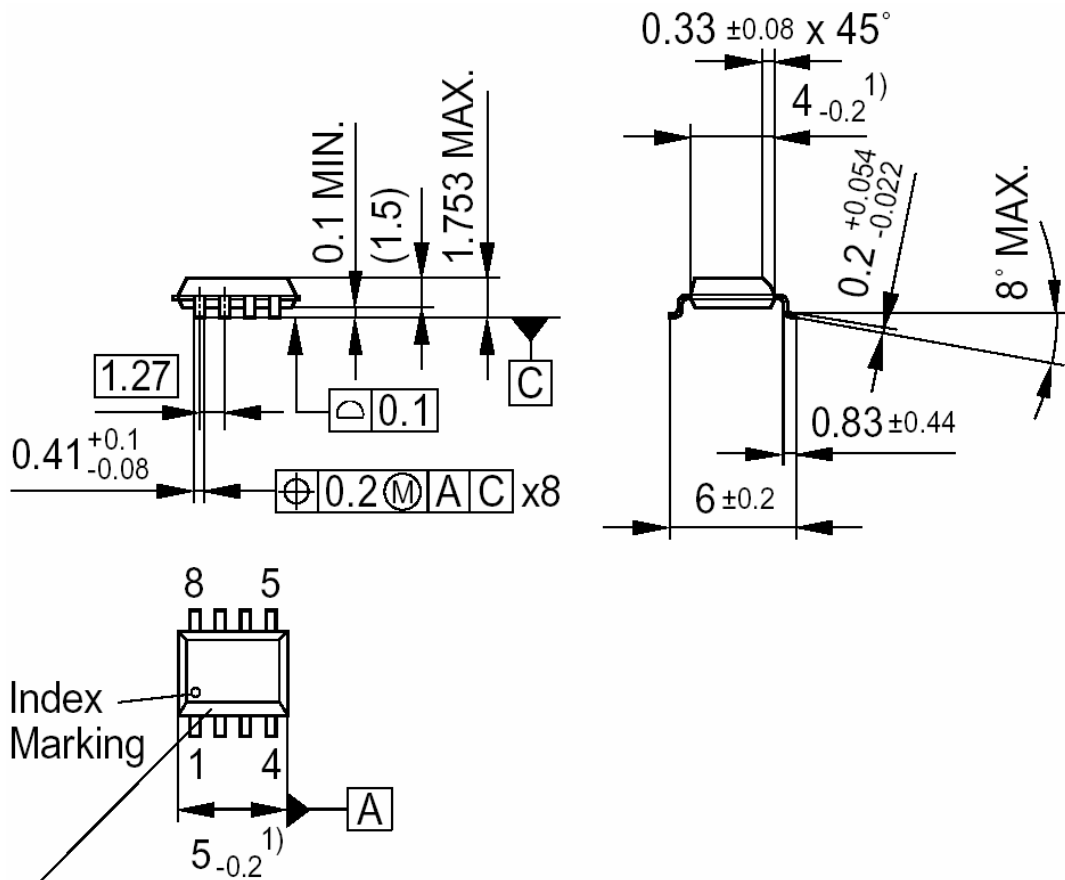

Index Marking (Chamfer)

1) Does not include plastic or metal protrusion of 0.15 max. per side

## Footprint Drawing P-DSO-8

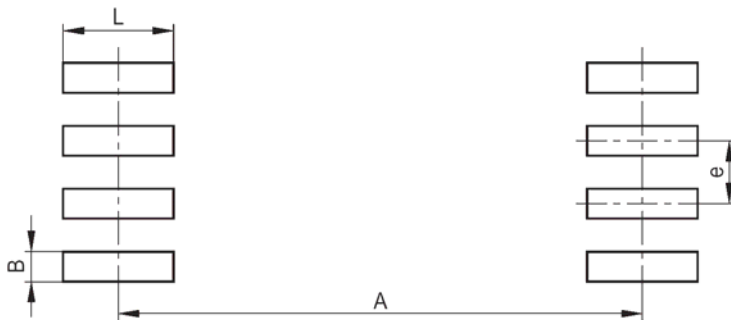


e	A	L	B
1,27 mm	5,69 mm	1,31 mm	0,65 mm

Revision History		
Datasheet DS-CoreControl-TDA21107		
Actual Release: V1.0 Date: 10.08.2004		Previous Release: Date:
Page of actual Rel.	Page of prev. Rel.	Subjects changed since last release

For questions on technology, delivery and prices please contact the Infineon Technologies Offices in Germany or the Infineon Technologies Companies and Representatives worldwide: see the address list on the last page or our webpage at

<http://www.infineon.com/DCDC>

**CoreControl™**, **OptiMOS™** and **OptiMOS II™** are trademarks of Infineon Technologies AG.

<p><b>We listen to Your Comments</b></p> <p>Any information within this dokument that you feel is wrong, unclear or missing at all?          Your feedback will help us to continuously improve the quality of this dokument.          Please send your proposal (including a reference to this dokument) to:  <b><a href="mailto:mcdoku.comment@infineon.com">mcdoku.comment@infineon.com</a></b></p>	
--	--

**Edition 2004-08-10**

Published by Infineon Technologies AG,  
 St.-Martin-Strasse 53,  
 D-81541 München

© Infineon Technologies AG 2004.  
 All Rights Reserved.

**Attention please!**

The information herein is given to describe certain components and shall not be considered as warranted characteristics.  
 Terms of delivery and rights to technical change reserved.  
 We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.  
 Infineon Technologies is an approved CECC manufacturer.

**Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

**Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.  
 Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

## Infineon Technologies AG sales offices worldwide – partly represented by Siemens AG

<p><b>A</b>  <b>Siemens AG Österreich</b>            Erdberger Lände 26  <b>A-1031 Wien</b>            T (+43)1-17 07-3 56 11            Fax (+43)1-17 07-5 59 73</p> <p><b>AUS</b>  <b>Siemens Ltd.</b>            885 Mountain Highway            Bayswater, <b>Victoria 3153</b>            T (+61)3-97 21 21 11            Fax (+61)3-97 21 72 75</p> <p><b>B</b>  <b>Siemens Electronic Components</b>            Benelux            Charleroiesteenvweg 116/            Chaussée de Charleroi 116  <b>B-1060 Brussels/Bruxelles</b>            T (+32)2-5 36 69 05            Fax (+32)2-5 36 28 57            Email: components@siemens.nl</p> <p><b>BR</b>  <b>Siemens Ltda.</b>  <b>Semiconductores</b>            Avenida Mutinga, 3800-Pirituba  <b>05110-901 São Paulo-SP</b>            T (+55)11-39 08 25 64            Fax (+55)11-39 08 27 28</p> <p><b>CDN</b>  <b>Infineon Technologies Corporation</b>            320 March Road, Suite 604  <b>Canada, Ontario K2K 2E2</b>            T (+1)6 13-5 91 63 86            Fax (+1)6 13-5 91 63 89</p> <p><b>CH</b>  <b>Siemens Schweiz AG</b>            Bauelemente            Freilagerstrasse 40  <b>CH-8047 Zürich</b>            T (+41)1-4 953065            Fax (+41)1-4 955050</p> <p><b>D</b>  <b>Infineon Technologies AG</b>            Völklinger Str.2  <b>D-40219 Düsseldorf</b>            T (+49)2 11-3 99 29 30            Fax (+49)2 11-3 99 14 81</p> <p><b>Infineon Technologies AG</b>            Werner-von-Siemens-Platz 1  <b>D-30880 Laatzen (Hannover)</b>            T (+49)5 11-8 77 22 22            Fax (+49)5 11-8 77 15 20</p> <p><b>Infineon Technologies AG</b>            Von-der-Tann-Straße 30  <b>D-90439 Nürnberg</b>            T (+49)9 11-6 54 76 99            Fax (+49)9 11-6 54 76 24</p> <p><b>Infineon Technologies AG</b>            Weissacher Straße 11  <b>D-70499 Stuttgart</b>            T (+49)7 11-1 37 33 14            Fax (+49)7 11-1 37 24 48</p> <p><b>D</b>  <b>Infineon Technologies AG</b>            Halbleiter Distribution            Richard-Strauss-Straße 76  <b>D-81679 München</b>            T (+49)89-92 21 40 86            Fax (+49)89-92 21 20 71</p> <p><b>DK</b>  <b>Siemens A/S</b>            Borupvang 3  <b>DK-2750 Ballerup</b>            T (+45)44 77-44 77            Fax (+45)44 77-40 17</p> <p><b>E</b>  <b>Siemens S.A.</b>            Dpto. Componentes            Ronda de Europa, 5  <b>E-28760 Tres Cantos-Madrid</b>            T (+34)91-5 14 71 51            Fax (+34)91-5 14 70 13</p>	<p><b>F</b>  <b>Infineon Technologies France,</b>            39/47, Bd.Ornano  <b>F-93527 Saint-Denis CEDEX2</b>            T (+33)1-49 22 31 00            Fax (+33)1-49 22 28 01</p> <p><b>FIN</b>  <b>Siemens Components Scandinavia</b>            P.O. Box 6 0  <b>FIN-02601 Espoo (Helsinki)</b>            T (+3 58)10-5 11 51 51            Fax (+3 58)10-5 11 24 95            Email:            scs@components.siemens.se</p> <p><b>GB</b>  <b>Infineon Technologies</b>            Siemens House            Oldbury  <b>GB-Bracknell, Berkshire</b>  <b>RG12 8FZ</b>            T (+44)13 44-39 66 18            Fax (+44)13 44-39 66 32</p> <p><b>H</b>  <b>Simacomp Kft.</b>            Lajos u.103  <b>H-1036 Budapest</b>            T (+36)1-4 57 16 90            Fax (+36)1-4 57 16 92</p> <p><b>HK</b>  <b>Infineon Technologies</b>  <b>Hong Kong Ltd.</b>            Suite 302, Level 3,            Festival Walk,            80 Tat Chee Avenue,            Yam Yat Tsuen,            Kowloon Tong  <b>Hong Kong</b>            T (+8 52)28 32 05 00            Fax (+8 52)28 27 97 62</p> <p><b>I</b>  <b>Siemens S..A.</b>            Semiconductor Sales            Via Piero e Alberto Pirelli, 10  <b>I-20126 Milano</b>            T (+39)02-66 76 -1            Fax (+39)02-66 76 43 95</p> <p><b>IND</b>  <b>Siemens Ltd.</b>            Components Division            No.84 Keonics Electronic City            Hosur Road  <b>Bangalore 561 229</b>            T (+91)80-8 52 11 22            Fax (+91)80-8 52 11 80</p> <p><b>Siemens Ltd.</b>            CMP Div, 5th Floor            4A Ring Road, IP Estate  <b>New Delhi 110 002</b>            T (+91)11-3 31 99 12            Fax (+91)11-3 31 96 04</p> <p><b>Siemens Ltd.</b>            CMP Div, 4th Floor            130, Pandurang Budhkar Marg,            Worli  <b>Mumbai 400 018</b>            T (+91)22-4 96 21 99            Fax (+91)22-4 96 22 01</p> <p><b>IRL</b>  <b>Siemens Ltd.</b>            Electronic Components Division            8, Raglan Road  <b>IRL-Dublin 4</b>            T (+3 53)1-2 16 23 42            Fax (+3 53)1-2 16 23 49</p> <p><b>IL</b>  <b>Nisko Ltd.</b>            2A, Habarzel St.            P.O.Box 58151  <b>61580 Tel Aviv –Isreal</b>            T (+9 72)3 -7 65 73 00            Fax (+9 72)3 -7 65 73 33</p>	<p><b>J</b>  <b>Siemens Components K.K.</b>            Talanawa Park Tower 12F &amp; 17F            3-20-14, Higashi-Gotanda,  <b>Shinagawa-ku, Tokyo</b>            T (+81)3-54 49 64 11            Fax (+81)3 -54 49 64 01</p> <p><b>MAL</b>  <b>Infineon Technologies AG</b>            Sdn Bhd            Bayan Lepas Free Industrial Zone1  <b>11900 Penang</b>            T (+60)4 -6 44 99 75            Fax (+60)4 -6 41 48 72</p> <p><b>N</b>  <b>Siemens Components</b>            Scandinavia            Østre Aker vei 24            Postboks 10, Veitvet  <b>N-0518 Oslo</b>            T (+47)22-63 30 00            Fax (+47)22-68 49 13            Email:            scs@components.siemens.se</p> <p><b>NL</b>  <b>Siemens Electronic Components</b>            Benelux            Postbus 16068  <b>NL-2500 BB Den Haag</b>            T (+31)70-3 33 20 65            Fax (+31)70-3 33 28 15            Email: components@siemens.nl</p> <p><b>NZ</b>  <b>Siemens Auckland</b>            300 Great South Road  <b>Greenland, Auckland</b>            T (+64)9-5 20 30 33            Fax (+64)9-5 20 15 56</p> <p><b>P</b>  <b>Siemens S.A.</b>            an Componentes Electronicos            R.Irmaos Siemens,1            Alfragide  <b>P-2720-093 Amadora</b>            T (+351)1-4 17 85 90            Fax (+351)1-4 17 80 83</p> <p><b>PK</b>  <b>Siemens Pakistan Engineering</b>  <b>Co.Ltd.</b>            PO Box 1129, Islamabad 44000            23 West Jinnah Ave  <b>Islamabad</b>            T (+92)51-21 22 00            Fax (+92)51-21 16 10</p> <p><b>PL</b>  <b>Siemens SP.z.o.o.</b>            ul.Zupnicza 11  <b>PL-03-821 Warszawa</b>            T (+48)22-8 70 91 50            Fax (+48)22-8 70 91 59</p> <p><b>ROK</b>  <b>Siemens Ltd.</b>            Asia Tower, 10th Floor            726 Yeoksam-dong, Kang-nam Ku            CPO Box 3001  <b>Seoul 135-080</b>            T (+82)2-5 27 77 00            Fax (+82)2-5 27 77 79</p> <p><b>RUS</b>  <b>INTECH electronics</b>            ul.Smolnaya, 24/1203  <b>RUS-125 445 Moskva</b>            T (+7)0 95 -4 51 97 37            Fax (+7)0 95 -4 51 86 08</p> <p><b>S</b>  <b>Siemens Components Scandinavia</b>            Österögatan 1, Box 46  <b>S-164 93 Kista</b>            T (+46)8-7 03 35 00            Fax (+46)8-7 03 35 01            Email:            scs@components.siemens.se</p>	<p><b>ROC</b>  <b>Infineon Technologies</b>  <b>Taiwan.Ltd.</b>            12F-1, No.3-2 Yuan Qu. St., Nan            Kang Software Park,  <b>Taipei, 115</b>            T (+8 86)2-2655 7500            Fax (+8 86)2-2655 7501</p> <p><b>SGP</b>  <b>Infineon Technologies Asia</b>  <b>Pacific,Pte.Ltd.</b>            168 Kallang Way  <b>Singapore 349 253</b>            T (+65)8 40 06 10            Fax (+65)7 42 62 39</p> <p><b>USA</b>  <b>Infineon Technologies Corporation</b>            1730 North First Street  <b>San Jose, CA 95112</b>            T (+1)4 08-5 01 60 00            Fax (+1)4 08-5 01 24 24</p> <p><b>Siemens Components, Inc.</b>            Optoelectronics Division            19000 Homestead Road  <b>Cupertino, CA 95014</b>            T (+1)4 08-2 57 79 10            Fax (+1)4 08-7 25 34 39</p> <p><b>Siemens Components, Inc.</b>            Special Products Division            186 Wood Avenue South  <b>Iselin, NJ 08830-2770</b>            T (+1)7 32-9 06 43 00            Fax (+1)7 32-6 32 28 30</p> <p><b>VRC</b>  <b>Infineon Technologies</b>  <b>Hong Kong Ltd.</b>  <b>Beijing Office</b>            Room 2106, Building A            Vantone New World Plaza            No.2 Fu Cheng Men Wai Da Jie Jie  <b>100037 Beijing</b>            T (+86)10 -68 57 90 -06,-07            Fax (+86)10 -68 57 90 08</p> <p><b>Infineon Technologies</b>  <b>Hong Kong Ltd.</b>  <b>Chengdu Office</b>            Room14J1, Jinyang Mansion            58 Tidu Street,  <b>Chengdu,</b>  <b>Sichuan Province 610 016</b>            T (+86)28-6 61 54 46 /79 51            Fax (+86)28 -6 61 01 59</p> <p><b>Infineon Technologies</b>  <b>Hong Kong Ltd.</b>  <b>Shanghai Office</b>            Room1101, Lucky Target Square            No.500 Chengdu Road North  <b>Shanghai 200003</b>            T (+86)21-63 6126 18 /19            Fax (+86)21-63 61 11 67</p> <p><b>Infineon Technologies</b>  <b>Hong Kong Ltd.</b>  <b>Shenzhen Office</b>            Room 1502, Block A            Tian An International Building            Renim South Road  <b>Shenzhen 518 005</b>            T (+86)7 55 -2 28 91 04            Fax (+86)7 55-2 28 02 17</p> <p><b>ZA</b>  <b>Siemens Ltd.</b>            Components Division            P.O.B.3438  <b>Halfway House 1685</b>            T (+27)11-6 52 -27 02            Fax (+27)11-6 52 20 42</p>
---	--	---	--