





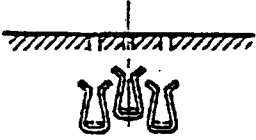
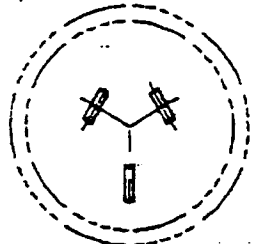



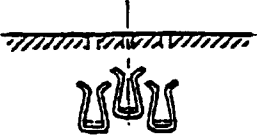







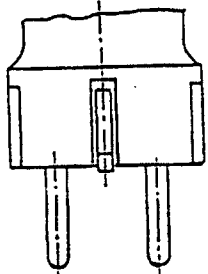


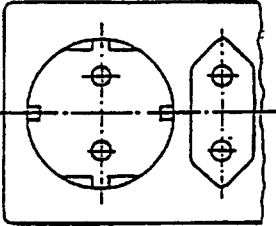
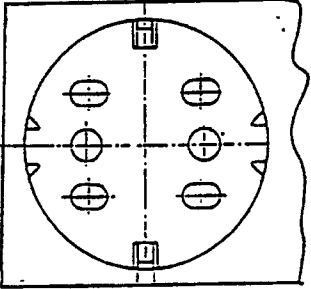
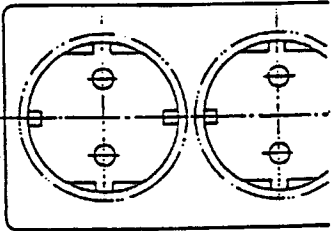
IEC 60083	NATIONAL SYSTEM USED IN AUSTRALIA		AU 1 OF AU 2	
			Date: 1998-11-01	
Number of poles	Rated values of accessory		Sketch designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P+ 	250	10	  Portable	 
2P+ 	250	10	  Fixed	 

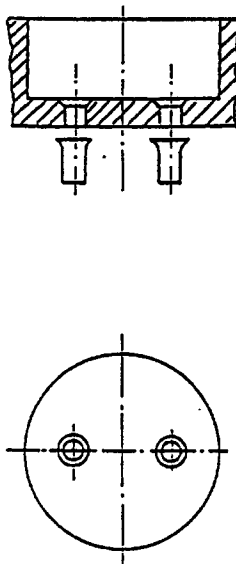
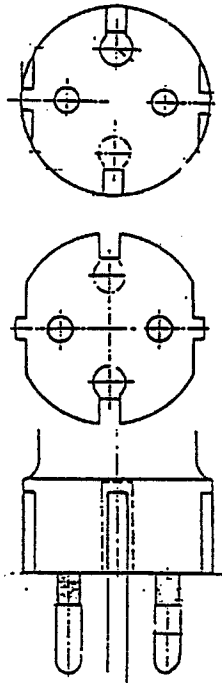
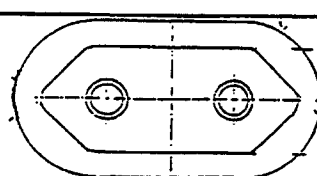
Portable socket-outlets for cards are specified in AS/NZS 3120. AS/NZS 3112 provides for a two pin 10A plug which has the same shape as the three pin 10A plug but no earth pin. A 10A plug is compatible with a 15A socket-outlet. A 15A plug is prevented from entering a 10A socket-outlet by the size of the earth pin.

For reference and further information, see AU 2





IEC 60083	NATIONAL SYSTEM USED IN AUSTRALIA		AU 2 OF AU 2	
			Date: 1996-11-01	
Number of poles	Rated values of accessory		Sketch designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P+ 	250	15	  Portable and fixed	 
Reference of National Standard or Regulation: AS/NZS 3112 Figures 2.1 and 3.5 AS/NZS 3120 Figure 1				
Further information obtainable from:		Standards Australia PO Box 1055 Strathfield NSW 2135 Australia		Telephone: +61 29748 4700 Telefax: +61 29748 8450 Telex:
Distribution and subscription from:		Standards Australia PO Box 1055 Strathfield NSW 2135 Australia		Telephone: +61 29748 4700 Telefax: +61 29748 8450 Telex:





IEC 60083	NATIONAL SYSTEM USED IN AUSTRIA		AT 1 of AT 5 Date: 1994-06-13	
	Number of Poles	Rated Values of Accessory		Sketch Designations
		Voltage V	Current A	Socket-outlets
2P + T	250	10/16 or 16~		
			 <p> ÖNORM E 6622 part 1 Typ A ÖNORM E 6622 part 2 Typ B ÖNORM E 6622 part 4 (portable) ÖNORM E 6622 part 9 (shutter) ÖNORM E 6622 part 10 (for incorporating) </p>	  <p>ÖNORM E 6623</p>
2P+T	250	10/16 or 16~	ÖNORM E 6622 part 8 splashproof portable	ÖNORM E 6622 part 7 (splashproof, portable)
For reference and further information, see AT 5				

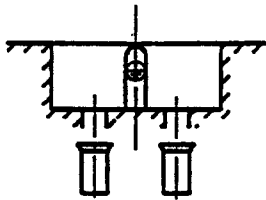





IEC 60083	NATIONAL SYSTEM USED IN AUSTRIA		AT 2 of AT 5	
			Date: 1994-06-13	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P+T	250	2,5+ 10/16 or 16~	 <p>ÖNORM E 6622 part 3</p>	
	250	2,5+ 10/16 or 16~	 <p>ÖNORM E 6622 part 3</p>	
	250	10/16 or 16~	 <p>ÖNORM E 6622 part 3</p>	
PORTABLE SOCKET OUTLET				
For reference and further information, see AT 5				

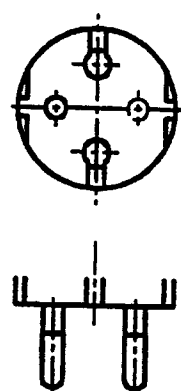
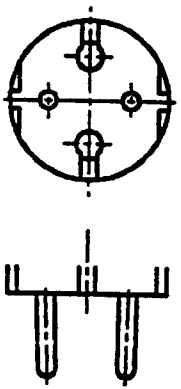
IEC 60083	NATIONAL SYSTEM USED IN AUSTRIA		AT 3 of AT 5 Date: 1994-06-13		
	Number of Poles	Rated Values of Accessory		Sketch Designations	
Voltage V		Current A	Socket-outlets	Plugs	
2P	250	10/16 or 16~	 <p>ÖNORM E 6621 part 1</p>	 <p>ÖNORM E 6624</p>	
2P	250	10/16 or 16~		<p>ÖNORM E 6622 part 6 (splashproof, portable)</p>	
2P	250	2,5		<p>Ö NORME 6622-11 (portable)</p>	

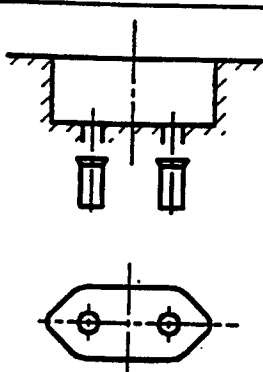
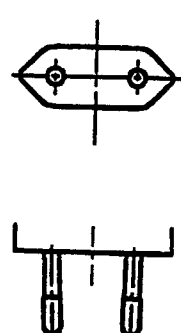
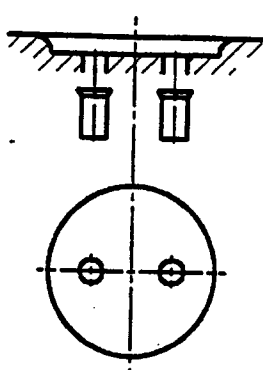
For reference and further information, see AT 5

IEC 60083	NATIONAL SYSTEM USED IN AUSTRIA		AT 4 of AT 5	
			Date: 1994-06-13	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P	250	2,5		  ÖVE-IG EN 50075
				  ÖNORM E 6620
plug of page 4 is compatible with socket outlet of page 1				
For reference and further information, see AT 5				

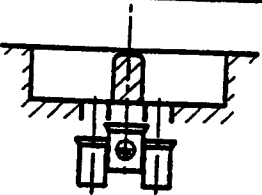



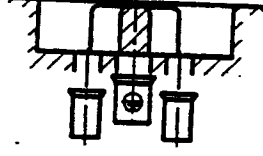



IEC 60083	NATIONAL SYSTEM USED IN AUSTRIA		AT 5 of AT 5	
			Date: 1994-06-13	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
3P+N+T	230/400	16	 ÖNORM E 6610	 ÖNORM E 6611
		25	 ÖNORM E 6612	 ÖNORM E 6613
Reference of National Standard or Regulation: ÖVE-IG 31				
Further Information Obtainable From :				
		ÖEK Eschenbachgasse 9 A-1010 Wien	Telephone: +43 1 587 63 73 Telefax: +43 1 586 74 08 Telex:	
Distribution and Subscription From :				
		ÖEK Eschenbachgasse 9 A-1010 Wien	Telephone: +43 1 587 63 73 Telefax: +43 1 586 74 08 Telex:	

IEC 60083	NATIONAL SYSTEM USED IN BELGIUM		BE 1 of BE 5	
			Date: 1994-03-09	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P+⊕	250	16	  NBN C 61-112-1 V Fixed and portable 1)	  NBN C 61-112-1 VI
2P+⊕	250	16		  NBN C 61-112-1 VII
1) The socket-outlets also accept plugs according to Standard Sheet VII, XVI and XVII of NBN C 61-112-1.				
For reference and further information, see BE 5				





IEC 60083	NATIONAL SYSTEM USED IN BELGIUM		BE 2 of BE 5	
			Date: 1994-03-09	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P	250	16		 <p>NBN C 61-112-1 XVII</p>
2P	250	2,5		 <p>NBN C 61-112-1 XVI</p>
<p>For reference and further information, see BE 5</p>				












IEC 60083	NATIONAL SYSTEM USED IN BELGIUM		BE 3 of BE 5	
	Rated Values of Accessory		Date: 1994-03-09	
Number of Poles	Voltage V	Current A	Sketch Designations	
			Socket-outlets	Plugs
2P	250	2,5	 <p>NBN C 61-112-1 XXIII</p>	 <p>NBN C 61-112-1 XVI</p>
2P	250	16	 <p>NBN C 61-112-1 I</p>	

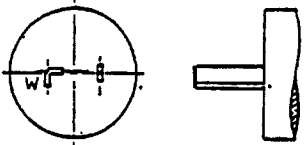
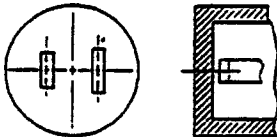
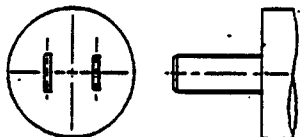
For reference and further information, see BE 5

IEC 60083	NATIONAL SYSTEM USED IN BELGIUM		BE 4 of BE 5	
			Date: 1994-03-09	
	Number of Poles	Rated Values of Accessory		Sketch Designations
Voltage V		Current A	Socket-outlets	Plugs
2P+⊕	415	16		
		32		
			NBN C 61-112-1 XXI	NBN C 61-112-1 XXII
3P+⊕	415	16		
		32		
			NBN C 61-112-1 XXI	NBN C 61-112-1 XXII

For reference and further information, see 'BE 5













IEC 60083	NATIONAL SYSTEM USED IN BELGIUM		BE 5 of BE 5		
	Number of Poles	Rated Values of Accessory		Sketch Designations	
		Voltage V	Current A	Socket-outlets	Plugs
	3P+N+⊕	415	16 32	  NBN C 61-112-1 XXI	  NBN C 61-112-1 XXII
Reference of National Standard or Regulation:					
NBN C 61-112-1 Plugs and socket-outlets for domestic and similar purposes.					
Further Information Obtainable From:		BELGIAN ELECTROTECHNICAL COMMITTEE GALERIE RAVENSTEIN 28, Bte 2 1000 BRUSSELS		Telephone: +32 2 5120028 Telefax: +32 2 5024921 Telex:	
Distribution and Subscription From:		INSTITUT BELGE DE NORMALISATION AVENUE DE LA BRABANCONNE, 29 1040 BRUXELLES		Telephone: +32 2 7349205 Telefax: +32 2 7334264 Telex:	

IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 1 of CA 11 Date: 1993-04-01	
	Number of POLES	Rated Values of Accessory		SKETCH DESIGNATIONS 
V Voltage		A Current	SOCKET - OUTLETS.	
1P + N	125	15	  <p>NEMA 1-15 R Fixed and Portable</p>	  <p>NEMA 1-15 P</p>
2 P	250	15	No socket-outlet configuration	  <p>NEMA 2-15 P.</p>
2 P	250	20	  <p>NEMA 2-20 R Fixed and Portable</p>	  <p>NEMA 2-20 P</p>
<p>NOTES : 1) X, Y, Z = POLES ; W = N (Neutral) ; G (or ⊕) = Ground 2) Plug 'NEMA 1-15 P' CAN BE POLARIZED, OR NON - POLARIZED 3) Plug 'NEMA 1-15 P' also mates with Socket-Outlet 'NEMA 5-15 R' (on page 3) 4) Plug 'NEMA 2-15 P' mates with Socket-Outlet 'NEMA 6-15 R' (on page 3)</p>				
For reference and further information, see CA 11				

IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 2 of CA 11 Date: 1993-04-01		
	Number of POLES	Rated Values of Accessory		SKETCH DESIGNATIONS	
V Voltage		A Current	SOCKET - OUTLETS	PLUGS	
1P + N	125	30	No socket-outlet configuration	 NEMA 1-30 P	
2 P	250	30	 NEMA 2-30 R Fixed and Portable	 NEMA 2-30 P	



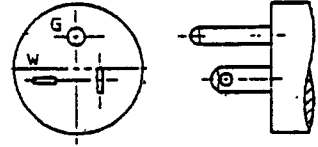

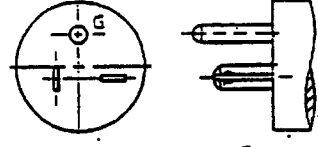

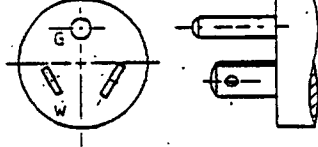

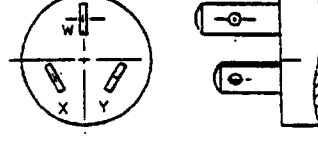
NOTES : 1) X, Y, Z = POLES . W = N (Neutral) . G (or ⊕) = Ground
 2) Plug 'NEMA 1-30 P' mates with Socket-Outlet 'NEMA 5-30 R' (on page 5)

For reference and further information, see CA 11

IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 3 of CA 11	
			Date: 1993-04-01	
Number of POLES	Rated Values of Accessory		SKETCH DESIGNATIONS	
	V Voltage	A Current	SOCKET - OUTLETS.	PLUGS
1P+N+⊕	125	15	  <p>NEMA 5-15 R Fixed and Portable</p>	  <p>NEMA 5-15 P</p>
2P+⊕	250	15	  <p>NEMA 6-15 R Fixed and Portable</p>	  <p>NEMA 6-15 P</p>
1P+N+⊕	277 AC	15	  <p>NEMA 7-15 R Fixed and Portable</p>	  <p>NEMA 7-15 P</p>

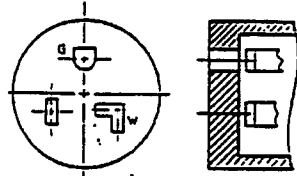
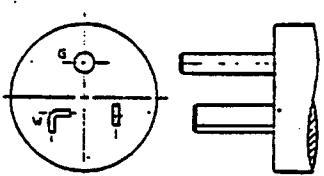
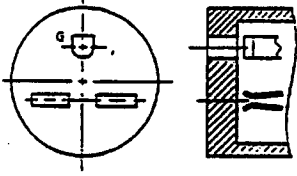
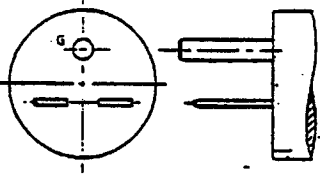
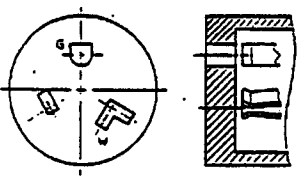
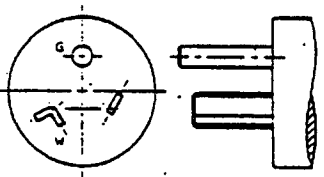
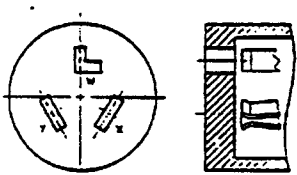
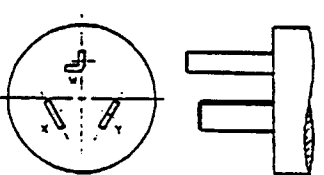
NOTES : 1) X, Y, Z = POLES . W = N (Neutral) . G (or ⊕) = Ground
 2) Socket-Outlet 'NEMA 5-15 R' also mates with Plug 'NEMA 1-15 P' (on page 1)
 3) Socket-Outlet 'NEMA 6-15 R' also mates with Plug 'NEMA 2-15 P' (on page 1)

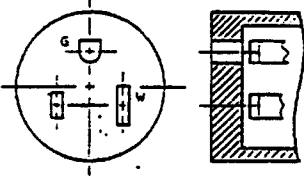
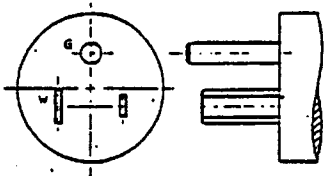
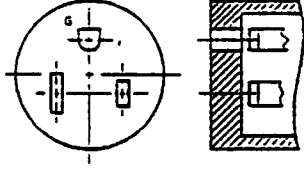
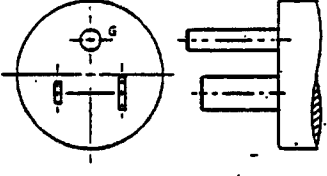
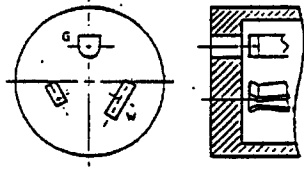
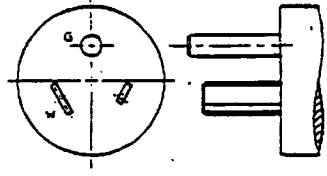
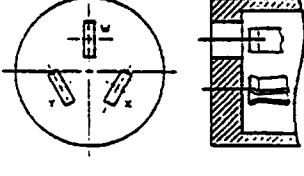
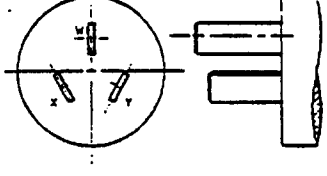
For reference and further information, see CA 11


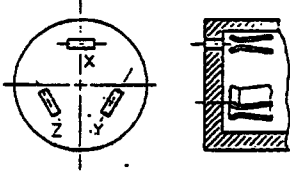
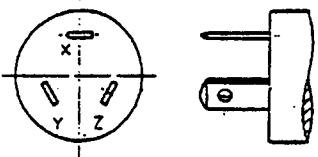
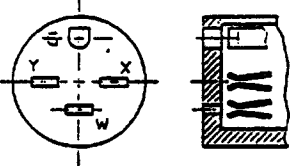
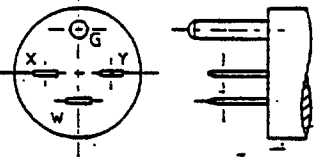
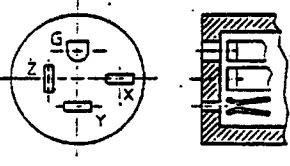
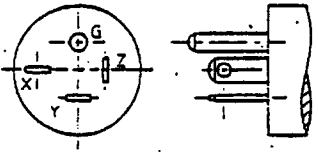
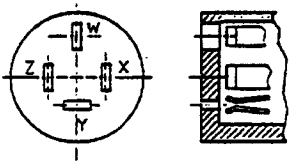
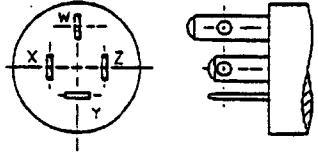
IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 4 of CA 11 Date: 1993-04-01	
	Number of POLES	Rated Values of Accessory V. Voltage	A Current	SKETCH DESIGNATIONS 
			SOCKET - OUTLETS	PLUGS
1P+N+⊕	125	20	 CSA 5-20 R Fixed and Portable	 NEMA 5-20 P
2P+⊕	250	20	 CSA 6-20 R Fixed and Portable	 NEMA 6-20 P
1P+N+⊕	277 AC	20	 NEMA 7-20 R Fixed and Portable	 NEMA 7-20 P
2P+N	125 / 250	20	 NEMA 10-20 R Fixed and Portable	 NEMA 10-20 P

NOTES : 1) X, Y, Z = POLES . W = N (Neutral) . G (or ⊕) = Ground

For reference and further information, see CA 11

















IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 5 of CA 11	
	Rated Values of Accessory		SKETCH DESIGNATIONS	
Number of POLES	V Voltage	A Current	Projection	
			SOCKET - OUTLETS	PLUGS
1P+N+⊕	125	30	 NEMA 5-30 R Fixed and Portable	 NEMA 5-30 P
2P+⊕	250	30	 NEMA 6-30 R Fixed and Portable	 NEMA 6-30 P
1P+N+⊕	277 AC	30	 NEMA 7-30 R Fixed and Portable	 NEMA 7-30 P
2P+N	125 / 250	30	 NEMA 10-30 R Fixed and Portable	 NEMA 10-30 P
NOTES : 1) X, Y, Z = POLES. W = N (Neutral). G (or ⊕) = Ground 2) Socket-Outlet 'NEMA 5-30 R' also mates with Plug 'NEMA 1-30 P' (on page 2.)				
For reference and further information, see CA 11				

















IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 6 of CA 11	
			Date: 1993-04-01	
Number of POLES	Rated Values of Accessory		SKETCH DESIGNATIONS	
	V Voltage	A Current	SOCKET - OUTLETS	PLUGS
1P+N+⊕	125	50	 NEMA 5-50 R Fixed and Portable	 NEMA 5-50 P
2P+⊕	250	50	 NEMA 6-50 R Fixed and Portable	 NEMA 6-50 P
1P+N+⊕	277 AC	50	 NEMA 7-50 R Fixed and Portable	 NEMA 7-50 P
2P+N	125 / 250	50	 NEMA 10-50 R Fixed and Portable	 NEMA 10-50 P
NOTES : 1) X, Y, Z = Poles . W = N (Neutral) . G (or ⊕) = Ground				
For reference and further information, see CA 11				

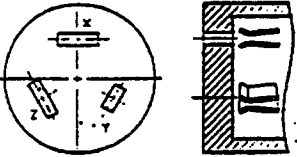
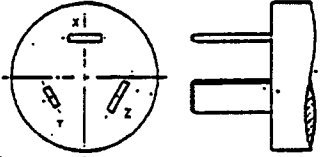
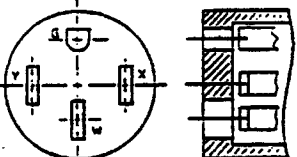
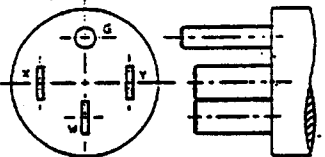
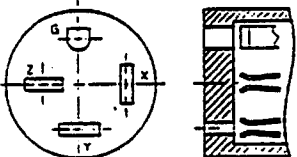
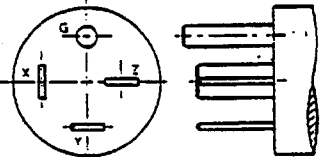
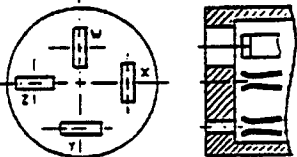
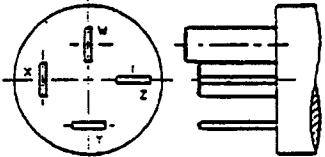
IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 7 of CA 11 Date: 1993-04-01		
	Number of POLES	Rated Values of Accessory		SKETCH DESIGNATIONS 	
V Voltage		A Current	SOCKET - OUTLETS	PLUGS	
3 P	250 3 PHASE	15	 NEMA 11-15 R Fixed and Portable	 NEMA 11-15 P	
2P+N ⊕	125 / 250	15	 NEMA 14-15 R Fixed and Portable	 NEMA 14-15 P	
3P ⊕	250 3 PHASE	15	 NEMA 15-15 R Fixed and Portable	 NEMA 15-15 P	
3P+N	120 / 208 3 PHASE Y	15	 NEMA 18-15 R Fixed and Portable	 NEMA 18-15 P	














NOTES : 1) X, Y, Z = POLES . W = N (Neutral) . G (or ⊕) = Ground
 2) Plug 'NEMA 11-15 P' also mates with Socket-Outlet 'NEMA 11-20 R' (on page 8)

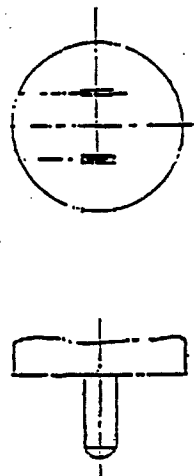
For reference and further information, see CA 11


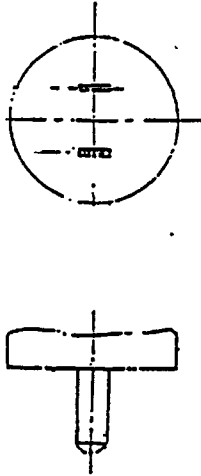
IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 8 of CA 11	
			Date: 1993-04-01	
Number of POLES	Rated Values of Accessory		SKETCH DESIGNATIONS	
	V Voltage	A Current	SOCKET - OUTLETS	PLUGS
3 P	250 3 PHASE	20	  <p>NEMA 11-20 R Fixed and Portable</p>	  <p>NEMA 11-20 P</p>
2P+N+⊕	125 / 250	20	  <p>NEMA 14-20 R Fixed and Portable</p>	  <p>NEMA 14-20 P</p>
3P+⊕	250 3 PHASE	20	  <p>NEMA 15-20 R Fixed and Portable</p>	  <p>NEMA 15-20 P</p>
3P+N	120 / 208 3 PHASE Y	20	  <p>NEMA 18-20 R Fixed and Portable</p>	  <p>NEMA 18-20 P</p>
NOTES: 1) X, Y, Z = POLES ; W = N (Neutral) ; G (or ⊕) = Ground 2) Socket-Outlet 'NEMA 11-20 R' also mates with Plug 'NEMA 11-15 P' (on page 7)				
For reference and further information, see CA 11				

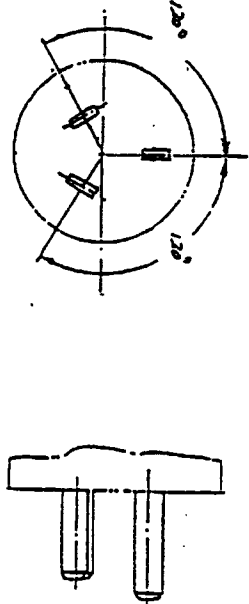
IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 9 of CA 11	
			Date: 1993-04-01	
Number of POLES	Rated Values of Accessory		SKETCH DESIGNATIONS	
	V Voltage	A Current	SOCKET - OUTLETS	PLUGS
3 P	250 3 PHASE	30	  <p>NEMA 11-30 R Fixed and Portable</p>	  <p>NEMA 11-30 P</p>
2P-N+⊕	125 / 250	30	  <p>NEMA 14-30 R Fixed and Portable</p>	  <p>NEMA 14-30 P</p>
3 P+⊕	250 3 PHASE	30	  <p>NEMA 15-30 R Fixed and Portable</p>	  <p>NEMA 15-30 P</p>
3P+N	120 / 208 3 PHASE Y	30	  <p>NEMA 18-30 R Fixed and Portable</p>	  <p>NEMA 18-30 P</p>
NOTES : 1) X, Y, Z = POLES ; W = N (Neutral) ; G (or ⊕) = Ground				
For reference and further information, see CA 11				

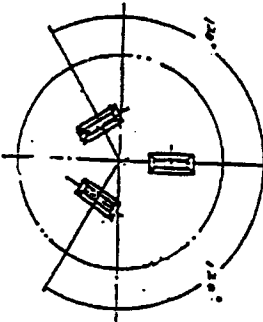
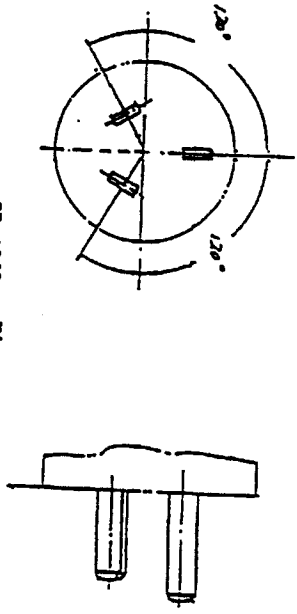
IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 10 of CA 11	
			Date: 1993-04-01	
Number of POLES	Rated Values of Accessory		SKETCH DESIGNATIONS	
	V Voltage	A Current	SOCKET - OUTLETS	PLUGS
3 P	250 3 PHASE	50	 <p>NEMA 11-50 R Fixed and Portable</p>	 <p>NEMA 11-50 P</p>
2P+N+⊕	125 / 250	50	 <p>NEMA 14-50 R Fixed and Portable</p>	 <p>NEMA 14-50 P</p>
3 P+⊕	250 3 PHASE	50	 <p>NEMA 15-50 R Fixed and Portable</p>	 <p>NEMA 15-50 P</p>
3P+N	120 / 208 3 PHASE Y	50	 <p>NEMA 18-50 R Fixed and Portable</p>	 <p>NEMA 18-50 P</p>
NOTES : 1) X, Y, Z = POLES . W = N (Neutral) . G (or ⊕) = Ground				
For reference and further information, see CA 11				

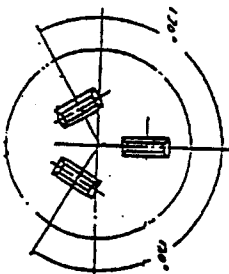
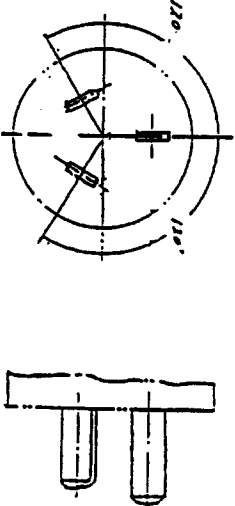
IEC 60083	NATIONAL SYSTEM USED IN CANADA		CA 11 of CA 11 Date: 1993-04-01		
	Number of POLES	Rated Values of Accessory		SKETCH DESIGNATIONS 	
V Voltage		A Current	SOCKET - OUTLETS	PLUGS	
2P+N+⊕	125 / 250	60	  NEMA 14-60 R Fixed and Portable	  NEMA 14-60 P	
3P+⊕	250 3 PHASE	60	  NEMA 15-60 R Fixed and Portable	  NEMA 15-60 P	
3P+N	120 / 208 3 PHASE Y	60	  NEMA 18-60 R Fixed and Portable	  NEMA 18-60 P	
Reference of National Standard or Regulation :					
NOTES : 1) X, Y, Z = POLES ; W = N (Neutral) ; G (or ⊕) = Ground 2) For Wiring Devices Dimensional Requirements, see Std Publication NEMA WD 6					
Further Information Obtainable From :		E.E.M.A.C. 10 Carlson Ct, Suite 210 Etobicoke, ON, Canada M9W6L2		Telephone +1-416-6747410 Telex : +1-416-6747412 Telex :	
Distribution and Subscription From :				Telephone : Telex : Telex :	


IEC 60083	NATIONAL SYSTEM USED IN		CN 1 of CN 7	
	CEINA		Date: 1995-07-30	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P	250	6 ¹⁾		 <p>DB 1002 . FIG. 1²⁾</p>
<p>1) For non-rewirable plugs only. 2) This 6A plug is compatible with the 10A socket outlet of Fig. 2.</p>				
For reference and further information, see CN 7				


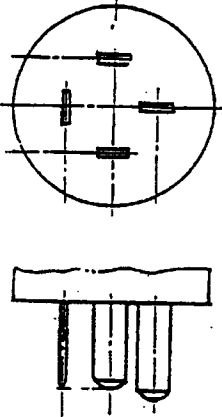
IEC 60083	NATIONAL SYSTEM USED IN CHINA		CN 2 of CN 7 Date: 1995-07-30		
	Number of Poles	Rated Values of Accessory		Sketch Designations	
Voltage V		Current A	Socket-outlets	Plugs	
2P	250	10			
			GB 1002 FIG. 2 Fixed and Portable	GB 1002 FIG. 1	
For reference and further information, see CN 7					

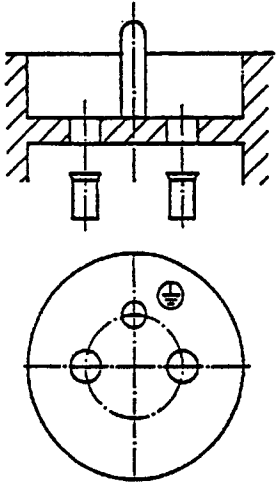
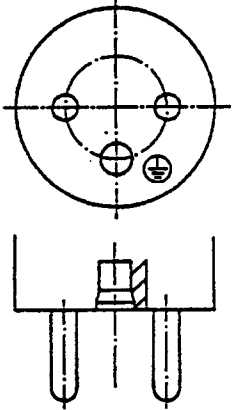
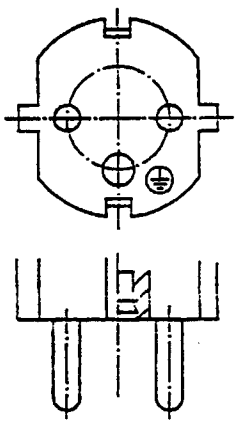
IEC 60083	NATIONAL SYSTEM USED IN CHINA		CN 3 of CN 7	
			Date: 1995-07-30	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P+ ⊕	250	6 ¹⁾		 <p>GB 1002 FIG. 3.2)</p>
<p>1) For non-rewirable plugs only.</p> <p>2) This 6A plug is compatible with the 10A socket outlet of Fig. 4.</p>				
For reference and further information, see CN 7				

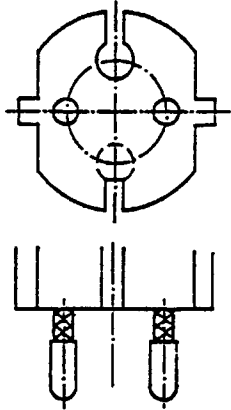
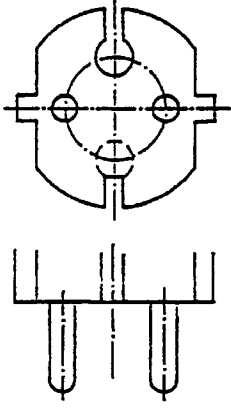
IEC 60083	NATIONAL SYSTEM USED IN CHINA		CN 4 of CN 7	
			Date: 1995-07-30	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P+⊕	250	10	GB 1002 Fig. 4 Fixed and portable 	GB 1002 FIG. 3 
For reference and further information, see CN 7				

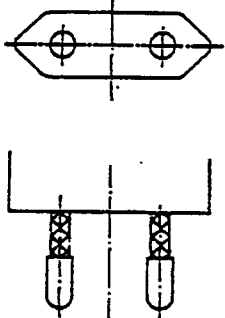
IEC 60083	NATIONAL SYSTEM USED IN CHINA		CN 5 of CN 7	
			Date: 1995-07-30	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P+⊕	250	16	GB 1002 Fig. 6 Fixed and Portable 	GB 1002 Fig. 5 
For reference and further information, see CN 7				

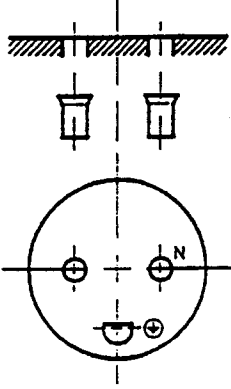

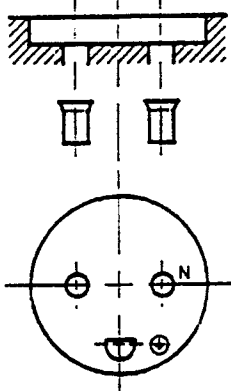

IEC 60083	NATIONAL SYSTEM USED IN CHINA		CN 6 of CN 7 Date: 1995-07-30		
	Number of Poles	Rated Values of Accessory		Sketch Designations	
Voltage V		Current A	Socket-outlets	Plugs	
2P	250	10	<p style="writing-mode: vertical-rl; transform: rotate(180deg);">GB 1002 Fig. 7 Fixed and Portable</p> 		
<p>For reference and further information, see CN 7</p>					

IEC 60083	NATIONAL SYSTEM USED IN CHINA		CN 7 of CN 7	
			Date: 1995-07-30	
Number of poles	Rated values of accessory		Sketch designations	
	Voltage V	Current A	Socket-outlets	Plugs
3P+⊕	440	16/32	GB 1003 FIG. 2 	GB 1003 FIG. 1 
Reference of National Standard or Regulation:				
Further information obtainable from:	GEARI 204 Xingangxi Rd Guangzhou, China		Telephone: 4451171 Telefax: 451516 Telex:	
Distribution and subscription from:	CSBTS 4 Zhichun Rd Beijing, China		Telephone: 2022288 Telefax: 01-2033737 Telex:	

IEC 60083	NATIONAL SYSTEM USED IN CZECH REPUBLIC		CZ1 of CZ3	
			Date: 1996-03-05	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P + ⊕	250	10/16	 <p>ČSN 35 4516 IEC 83: C 3 a FIXED AND PORTABLE</p> <p>THE SOCKET-OUTLETS ALSO ACCEPT PLUGS ACCORDING TO STANDARD SHEETS C 5/1, C6, AND ČSN EN 50 075</p>	 <p>ČSN 35 4516 IEC 83:1975 C 3·b</p>
			 <p>ČSN 35 4516 IEC 83:1975 C 4</p>	
For reference and further information, see CZ3				

IEC 60083	NATIONAL SYSTEM USED IN CZECH REPUBLIC		CZ2 of CZ3	
			Date: 1996-03-05	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P	250	10/16		 <p>ČSN 35 4516 1) IEC 83 C 6</p>
2P	250	2,5		 <p>ČSN 35 4516 IEC 83 C 5/1</p>
1) ALSO ALTERNATIVE OF PLUG WITH THE MINIMUM OUTLINE.				
For reference and further information, see CZ3				

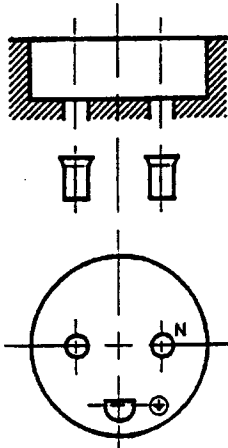
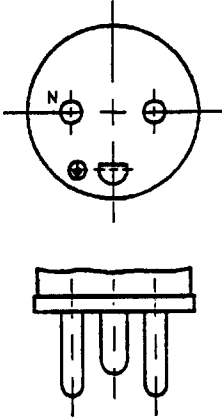
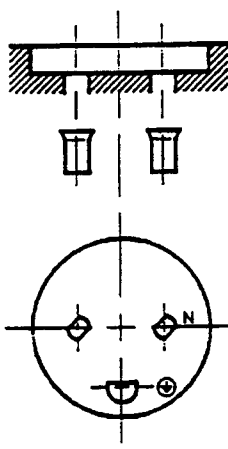
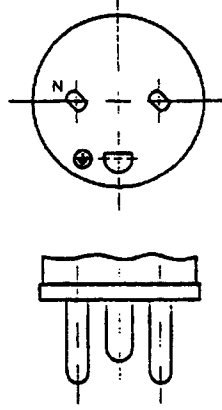
IEC 60083	NATIONAL SYSTEM USED IN CZECH REPUBLIC		CZ3 of CZ3	
			Date: 1996-03-05	
Number of Poles	Rated Values of Accessory		Sketch Designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P	250	2,5		 <p>ČSN 35 4516 ČSN EN 50 075 IEC 83 C 5/II</p>
Reference of National Standard or Regulation:				
National standard of the Czech republic: ČSN 35 4516 ČSN 35 4517				
Further Information Obtainable From:	CZECH STANDARDS INSTITUTE Information division Biskupský dvůr 5 CZ-110 02 PRAHA 1		Telephone: +42-2-21802111 Telefax: +42-2-2328160 Telex:	
Distribution and Subscription From:	CZECH STANDARDS INSTITUTE Hornoměřská 40 102 04 Praha 10		Telephone: +42-2-7862480 Telefax: +42-2-7866951 Telex:	

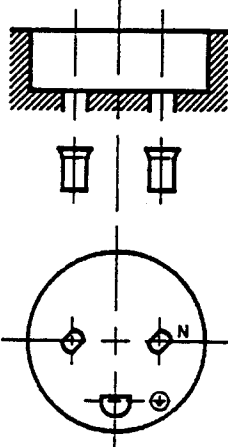
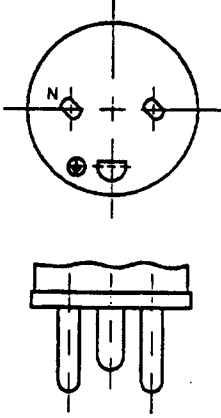
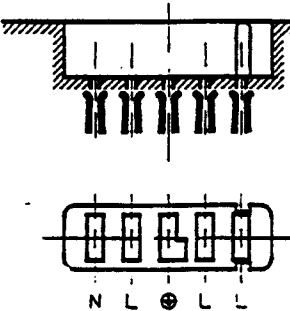

IEC 60083	NATIONAL SYSTEM USED IN DENMARK		Page: DK 1 of DK 6 Date: 1996-03-22	
Number of poles	Rated values of accessory		Sketch designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P + ⊕	250	10	 <p data-bbox="665 888 816 975">SR 107-2-D1 DK 1-1a Fixed only</p>	
2P + ⊕	250	10	 <p data-bbox="665 1458 816 1545">SR 107-2-D1 DK 1-1b Fixed only</p>	 <p data-bbox="1035 1275 1186 1333">SR 107-2-D1 DK 2-1a</p>

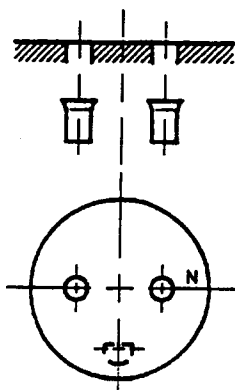

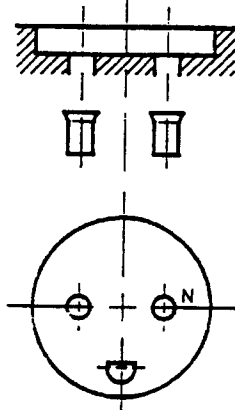

¹⁾ The socket-outlets are only intended to be used as a part of switched socket-outlets or in two-way socket-outlets with the outlets individually switched.

²⁾ The socket-outlets also accept plugs according to Standard Sheets DK 2-5a, DKA 2-1a, DKA 2-1b, EN 50 075 and IEC 83, Standard Sheets C 1b, C 2b, C 3b, C 4, C5 and C 6. The underlined types are for limited use only as they do not establish earth continuity.

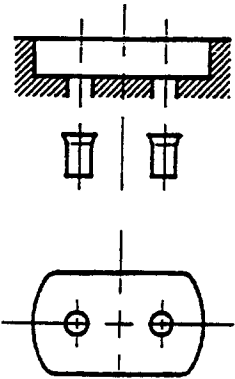
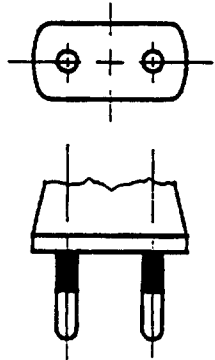
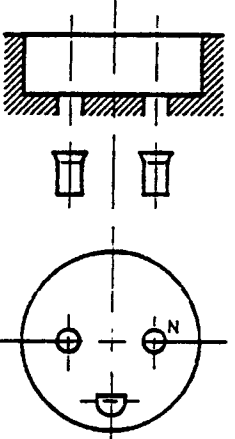
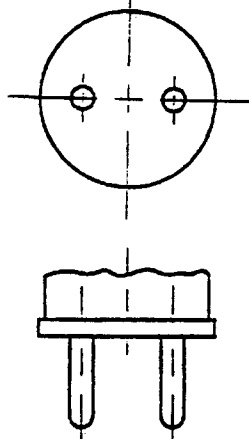
For reference and further information, see DK 6

IEC 60083	NATIONAL SYSTEM USED IN DENMARK		Page: DK 2 of DK 6 Date: 1996-03-22	
Number of poles	Rated values of accessory		Sketch designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P + ⊕	250	10	 <p data-bbox="658 879 823 966">SR 107-2-D1 DK 1-3a Portable only</p>	 <p data-bbox="1029 879 1179 937">SR 107-2-D1 DK 2-1a</p>
2P + ⊕	250	10	 <p data-bbox="658 1458 823 1535">SR 107-2-D1 DK 1-5b Fixed and portable</p>	 <p data-bbox="1029 1458 1179 1516">SR 107-2-D1 DK 2-5a</p>
<p data-bbox="192 1555 960 1584">1) The socket-outlets are also used for integration in adaptors and equipment.</p> <p data-bbox="192 1593 480 1622">2) Note 2 on page 1 applies.</p> <p data-bbox="192 1632 1097 1661">3) For Information Technology. Only plugs according to Standard Sheet DK 2-5a can enter.</p>				
<p data-bbox="192 1709 658 1738">For reference and further information, see DK 6</p>				

IEC 60083	NATIONAL SYSTEM USED IN DENMARK		Page: DK 3 of DK 6 Date: 1996-03-22	
Number of poles	Rated values of accessory		Sketch designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P + ⊕	250	10	 <p data-bbox="665 888 816 966">SR 107-2-D1 DK 1-7a Portable only</p>	 <p data-bbox="1035 888 1186 946">SR 107-2-D1 DK 2-5a</p>
3P+N+⊕	250/440	16	 <p data-bbox="665 1468 816 1526">SR 107-2-D1 DK 5-1a</p>	 <p data-bbox="1035 1468 1186 1526">SR 107-2-D1 DK 6-1a</p>
<p data-bbox="198 1561 1097 1593">1) For Information Technology. Only plugs according to Standard Sheet DK 2-5a can enter.</p>				
<p data-bbox="198 1719 665 1748">For reference and further information, see DK 6</p>				

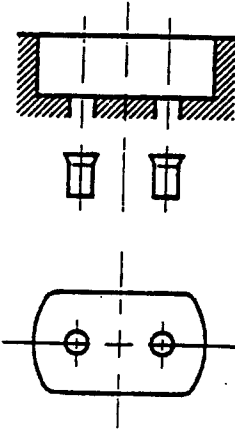
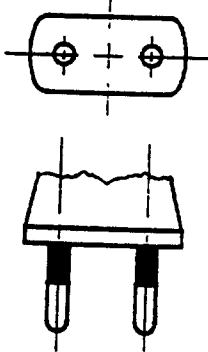
IEC 60083	NATIONAL SYSTEM USED IN DENMARK		Page: DK 4 of DK 6 Date: 1996-03-22		
	Number of poles	Rated values of accessory		Sketch designations	
		Voltage V	Current A	Socket-outlets	Plugs
2P	250	10	 <p>SR 107-2-D1 DKA 1-1a 1) 2) 3)</p>		
2P	250	10	 <p>SR 107-2-D1 DKA 1-1b 4)</p>	 <p>SR 107-2-D1 DKA 2-1a</p>	
<p>1) The socket-outlets are only intended for use as a part of switched socket-outlets or in two-way socket-outlets with the outlets individually switched.</p> <p>2) The socket-outlets may be provided with a dummy hole for the earthing pin.</p> <p>3) The socket-outlets also accept plugs according to Standard Sheets DKA 2-1b, EN 50 075 and IEC 83, Standard Sheets C 1b, C 2b, C 3b, C 4, C5 and C 6 as well as DK 2-1a and DK 2-5a, if provided with a dummy hole.</p> <p>4) Note 2 on page 1 applies. Earth continuity is never established.</p>					

For reference and further information, see DK 6

IEC 60083	NATIONAL SYSTEM USED IN DENMARK		Page: DK 5 of DK 6 Date: 1996-03-22	
Number of poles	Rated values of accessory		Sketch designations	
	Voltage V	Current A	Socket-outlets	Plugs
2P + ⊕	250	10	 <p data-bbox="651 908 898 985">SR 107-2-D1 DKA 1-1c Fixed only</p>	 <p data-bbox="1022 908 1173 966">SR 107-2-D1 DKA 2-1b</p>
2P + ⊕	250	10	 <p data-bbox="651 1477 898 1564">SR 107-2-D1 DKA 1-3a Portable only</p>	 <p data-bbox="1022 1477 1173 1535">SR 107-2-D1 DKA 2-1a</p>

1) The socket-outlets shall only be used in socket-outlets with two or more outlets, one of which being constructed according to Standard Sheet DKA 1-1b.
 2) The socket-outlets also accept plugs according to EN 50 075.
 3) Note 2 on page 1 applies. Earth continuity is never established.

For reference and further information, see DK 6

IEC 60083	NATIONAL SYSTEM USED IN DENMARK		Page: DK 6 of DK 6 Date: 1996-11-19		
	Number of poles	Rated values of accessory		Sketch designations	
		Voltage V	Current A	Socket-outlets	Plugs
2P	250	10	 <p>SR 107-2-D1 DKA 1-3b Portable only</p>	 <p>SR 107-2-D1 DKA 2-1b</p>	
Reference of National Standard or Regulation: SR 107-1 and SR 107-2-D1.					
<p>1) Socket-outlets according to this standard sheet are accepted in multiway adaptors and multiple portable socket-outlets only.</p> <p>2) The socket-outlets also accept plugs according to EN 50 075.</p> <p>General: Accessories according to Standard Sheets DKA 1-1a, DKA 1-1b, DKA 1-1c, DKA 1-3a, DKA 1-3b, DKA 2-1a and DKA 2-1b shall have a degree of protection not higher than IPXO.</p>					
Further information obtainable from:		DEMKO Postbox 514 Lyskær 8 DK-2730 Herlev		Telephone: +45 44 85 65 65 Telefax: +45 44 85 65 00 e-mail: demko@demko.dk	
Distribution and subscription from:		Schultz Information Elektricitetsrådets udgivelser Herstedvang 10-12 DK-2620 Albertslund		Telephone: +45 43 63 23 00 Telefax: +45 43 63 19 69 e-mail: schultz@schultz.dk	