

Miniature fuses —

Part 3: Specification for sub-miniature fuse-links

The European Standard EN 60127-3:1996, with the incorporation of amendment A2:2003 has the status of a British Standard

ICS 29.120.50

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by Technical Committee PEL/32, Fuses, to Subcommittee PEL/32/3, Miniature fuses, upon which the following bodies were represented:

British Electrotechnical Approvals Board
 Department of Trade and Industry (Consumer Safety Unit, CA Division)
 Electrical Installation Equipment Manufacturers Association (BEAMA Ltd.)
 Federation of the Electronics Industry
 Ministry of Defence

This British Standard, having been prepared under the direction of the Electrotechnical Sector Board, was published under the authority of the Standards Board and comes into effect on 15 November 1996

© BSI 3 September 2003

First published July 1991
 Second edition November 1996

The following BSI references relate to the work on this standard:

Committee reference PEL/32/3
 Draft announced in *BSI Update* July 1996

Amendments issued since publication

Amd. No	Date	Comments
14530	3 September 2003	See national foreword

ISBN 0 580 26081 X

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	2
Text of EN 60127-3	3

National foreword

This British Standard has been prepared by Subcommittee PEL/32/3 and is the English language version of EN 60127-3:1996, Miniature fuses.

Part 3: Sub-miniature fuse-links, including amendment A2:2003, published by the European Committee for Electrotechnical Standardization (CENELEC). It is identical with IEC 60127-3:1988, together with its amendment 1:1991 and corrigendum October 1994, including amendment 2:2002, published by the International Electrotechnical Commission (IEC).

The start and finish of text introduced or altered by amendment is indicated in the text by tags $\boxed{A_1}$ $\langle A_1 \rangle$. Tags indicating changes to CENELEC text carry the number of the amendment. For example, text altered by CENELEC amendment A1 is indicated by $\boxed{A_1}$ $\langle A_1 \rangle$.

This British Standard supersedes BS EN 60127-3:1991 which will be withdrawn on 1996-12-01.

This British Standard is one of a series. The other parts are as follows:

- | | |
|---------------|--|
| BS EN 60127-1 | <i>Definitions for miniature fuses and general requirements for miniature fuse-links</i> |
| BS EN 60127-2 | <i>Specification for cartridge fuse-links</i> |
| BS EN 60127-5 | <i>Guide for the quality assessment of miniature fuse-links</i> |
| BS EN 60127-6 | <i>Fuse holders for miniature cartridge fuse-links</i> |

It is anticipated that when IEC 60127-4 is published it will be approved by CENELEC as EN 60127-4.

For the purposes of this British Standard, any reference to IEC page numbers in the text should be ignored.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled "International Standards Correspondence Index", or by using the "Search" facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the EN title page, pages 2 to 23 and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Descriptors: Miniature fuse, sub-miniature fuse, specification, rated characteristic, dimension, test

English version

Miniature fuses — Part 3: Sub-miniature fuse-links

(includes amendment A2:2003)
(IEC 60127-3:1988 + A1:1991 + A2:2002)

Coupe-circuit miniatures —
Partie 3: Eléments de remplacement subminiatures
(inclut l'amendement A2:2003)
(CEI 60127-3:1988 + A1:1991 + A2:2002)

Geräteschutzsicherungen —
Teil 3: Kleinstsicherungseinsätze
(enthält Änderung A2:2003)
(IEC 60127-3:1988 + A1:1991 + A2:2002)

This European Standard was approved by CENELEC on 1996-03-05 and amendment A2 was approved by CENELEC on 2003-02-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovakia, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B-1050 Brussels

Foreword

The text of amendment 1:1991 (with the corrigendum October 1994) to the International Standard IEC 60127-3:1988, prepared by SC 32C, Miniature fuses, of IEC TC 32, Fuses, was submitted to the Unique Acceptance Procedure and was approved by CENELEC as amendment A1 to EN 60127-3:1991 without any modification.

The ratification of this amendment A1 was changed on 1996-03-05 into the ratification of a new edition of EN 60127-3 based on the text of IEC 60127-3:1988 + A1:1991 + corrigendum October 1994.

This European Standard replaces EN 60127-3:1991.

The following dates were fixed:

- latest date by which the EN has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 1996-12-01
- latest date by which the national standards conflicting with the EN have to be withdrawn (dow) 1996-12-01

For products which have complied with EN 60127-3:1991 before 1996-12-01, as shown by the manufacturer or by a certification body, this previous standard may continue to apply for production until 2001-12-01.

Annexes designated “normative” are part of the standard. In this standard, Annex ZA is normative. Annex ZA has been added by CENELEC.

Foreword to amendment A2

The text of document 32C/323/FDIS, future, amendment 2 to IEC 60127-3:1988, prepared by SC 32C, Miniature fuses, of IEC TC 32, Fuses, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as amendment A2 to EN 60127-3:1996 on 2003-02-01.

The following dates were fixed:

- latest date by which the amendment has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2003-11-01
- latest date by which the national standards conflicting with the amendment have to be withdrawn (dow) 2006-02-01

Contents

	Page
Foreword	2
Introduction	3
Section 1. Additional requirements and test equipment	3
1 Scope	3
2 Object	3
3 Definitions	3
4 General requirements	3
5 Standard ratings	3
6 Marking	3
7 General notes on tests	4
8 Dimensions and construction	4
9 Electrical requirements	5
Section 2. Standard sheets	15
Annex ZA (normative) Normative references to international publications with their corresponding European publications	23
Figure 1 — Standard printed wiring test board (for rated currents up to 5 A) (see Subclause 7.3)	12
Figure 2 — Standard test base for printed wiring board (see Subclause 7.3)	13
Figure 3 — Typical circuit for breaking capacity tests for low breaking capacity sub-miniature fuse-links (see Subclause 9.3)	14
Table 1 — Testing schedule for individual ampere ratings, standard sheets 1 and 2	7
Table 2 — Testing schedule for individual ampere ratings, standard sheets 3 and 4	8
Table 3 — Testing schedule for maximum ampere rating of a homogeneous series, standard sheets 1 and 2	9
Table 4 — Testing schedule for maximum ampere rating of a homogeneous series, standard sheets 3 and 4	10
Table 5 — Testing schedule for minimum ampere rating of a homogeneous series, standard sheets 1 to 4	11

Section 1. Additional requirements and test equipment

Introduction

The users of miniature fuses express the wish that all standards, recommendations and other documents relating to miniature fuses should have the same publication number in order to facilitate reference to fuses in other specifications, e.g. equipment specifications.

Furthermore a single publication number and subdivision into parts would facilitate the establishment of new standards, because paragraphs containing general requirements need not be repeated.

The new IEC Publication 60127 series is intended to be subdivided as follows:

Publications Nos.	60127:	Miniature fuses (general title)
	60127-1:	Part 1: Definitions for miniature fuses and general requirements for miniature fuse-links.
	60127-2:	Part 2: Cartridge fuse-links.
	60127-3:	Part 3: Sub-miniature fuse-links.
	60127-4:	Part 4: Universal modular fuse-links.
	60127-5:	Part 5: Guidelines for quality assessment of miniature fuse-links.
	60127-6:	Part 6: Fuse-holders (until now IEC 60257).
	60127-7:	(free for further documents).
	60127-8:	(free for further documents).
	60127-9:	Part 9: Test-holders and test circuits.
	60127-10:	Part 10: User guide.

The third part of this standard covers additional requirements, test equipment and Standard Sheets.

1 Scope

This standard relates to special requirements applicable to sub-miniature fuse-links adapted to printed circuits and used for the protection of electric appliances, electronic equipment and component parts thereof, normally intended to be used indoors.

It does not apply to sub-miniature fuse-links for appliances intended to be used under special conditions, such as in a corrosive or explosive atmosphere.

NOTE Electrical and electronic circuit designers and printed circuit board manufacturers are advised to allow a 10 mm cube space for all sub-miniature fuse-links.

This standard applies in addition to the requirements of Part 1.

2 Object

The object of this standard is:

to define special and additional test methods for sub-miniature fuse-links applying in addition to the requirements of Part 1.

3 Definitions (see Part 1)

4 General requirements (see Part 1)

5 Standard ratings (see Part 1)

6 Marking

Additionally to the requirements of Clause 6 in Part 1, the following criterion is to be observed.

6.4 Sub-miniature fuse-links according to standard sheets 3 and 4 may be provided with markings for the rated current, the rated voltage and the time/current characteristic on the top so that they are visible when the fuse-link is mounted.

7 General notes on tests

Additionally to the requirements of Clause 7 in Part 1 the following criteria are to be observed.

7.2.1 For testing individual fuse ratings according to standard sheets 1 and 2, the number of sub-miniature fuse-links required is 66, of which 12 are kept as spares. The testing schedule is shown in Table 1.

For testing individual fuse ratings according to standard sheets 3 and 4, the number of fuse-links required is 51, of which 12 are kept as spares. The testing schedule is shown in Table 2.

For the maximum ampere rating of a homogeneous series, the number of fuse-links required in the case of fuse-links in accordance with standard sheets 1 and 2 is 56, of which 22 are kept as spares. The testing schedule is shown in Table 3. The number of fuse-links required in the case of fuse-links in accordance with standard sheets 3 and 4 is 51, of which 22 are kept as spares. The testing schedule is shown in Table 4.

For the minimum ampere rating of a homogeneous series the number of fuse-links required is 38, of which 16 are kept as spares. The test schedule is shown in Table 5.

Additionally to the test mentioned in subclause 7.2.1 of Part 1, sub-miniature fuse-links shall be taken and shall be tested or inspected in accordance with the following subclause:

5. Sub-miniature fuse-link terminations (subclause 8.3)

7.3 Fuse-bases for testing

For tests that require a printed wiring board for mounting and connection of the sub-miniature fuse-link, a standard test board as shown in Figure 1, page 20, shall be used. This standard printed wiring board shall be mounted on the standard test base of Figure 2, page 21. The base material for the board shall be phenolic cellulose paper, copperclad, laminated sheet.

The nominal sheet thickness shall be 1,6 mm.

The nominal thickness of the copper layer shall be 0,035 mm.

Metal parts of the fuse-base shall be made of brass with copper content between 58 % and 70 %. Contact parts shall be silver-plated.

When two or more sub-miniature fuse-links are tested in series, the fuse-bases shall be located so that there will be a spacing of not less than 50 mm between any two sub-miniature fuse-links under test. The conductor connecting the fuse-bases together and connecting the fuse-bases to the ammeter and the source of supply shall be insulated copper wire. The length of each conductor shall be 250 mm and the diameter of the wire shall be approximately 0,64 mm.

NOTE Fuse-bases for testing having equivalent electrical and thermal properties and providing for quick insertion of sub-miniature fuse-links are under consideration.

7.4 Schedule for testing sub-miniature fuse-links according to standard sheets 1 and 2, Table 1, page 17, and according to standard sheets 3 and 4, Table 2, page 19.

8 Dimensions and construction

Additionally to the requirements of Clause 8 in Part 1 the following criteria are to be observed.

8.2 Construction

The sub-miniature fuse-link shall be resistant to heat according to subclause 9.7 of Part 1 and to fire in accordance with IEC 60695.

Compliance is checked by inspection.

This standard is based on the assumption that the case of the sub-miniature fuse-link is made of glass, ceramic or similar non-combustible material. For other material, such as the optional insulating sleeve or epoxy coating or similar material shown on standard sheet 2, additional tests are under consideration.

8.3 Sub-miniature fuse-link terminations

The sub-miniature fuse-link terminations should be firmly attached so that it is not possible to remove them without damaging the sub-miniature fuse-link.

The samples are pre-conditioned by immersion in water for 24 h at a temperature between 15 °C and 35 °C.

Terminations shall withstand the mechanical forces likely to be encountered during normal use. With the sub-miniature fuse-link held in a fixed position, each terminal in turn is subjected at ambient temperature to the forces laid down in this standard. These forces shall be exerted in the direction of the axis of the terminal and applied progressively without jerks. Test sample groups shall be equally divided among the specific termination tests stipulated in the relevant standard sheets.

Present test methods are to be performed in accordance with IEC 60068-2-21.

- For the tensile test (U_{a1}), the force applied shall be 10 N.
- For the thrust test (U_{a2}), the force applied shall be 2 N.
- For the bending test (U_b), if applicable, the force applied shall be 5 N and the number of bends shall be one.

At the conclusion of testing, the sub-miniature fuse-link terminations shall remain firmly attached and the voltage drop shall not exceed the maximum allowed in the relevant standard sheet.

8.4 Termination configuration

The sub-miniature fuse-link terminations shall be designed to permit easy installation on printed circuit wiring boards having a grid system of holes located on 2,54 mm centres, or into fuse-bases having a spacing between the terminations which is compatible with the 2,54 mm grid system.

NOTE Electrical and electronic circuit designers are advised to note that grid systems for holes located on 2,54 mm centres may result in spacings between conductive tracks, in some applications, which do not provide sufficient creepage or clearance for open-circuit conditions. In such circumstances, it may be necessary to modify the land area around the mounting hole to ensure an acceptable minimum distance between conductive tracks or select a sub-miniature fuse-link with longer terminations which can be formed to fit into hole spacings offering the necessary degree of protection.

More details are given in the User Guide (under consideration as Part 10).

9 Electrical requirements

Additionally to the requirements of Clause 9 in Part 1 the following criteria are to be observed.

9.1 Voltage drop

The use of a high impedance voltmeter is recommended for measuring the voltage drop. Voltage drop shall be measured at the points marked with U in Figure 1, page 20.

9.3 Breaking capacity

9.3.1 Additionally to the requirements of subclause 9.3.1 in Part 1 the following is to be observed.

Typical test circuits for a.c. and d.c. are given in Figure 3, page 22.

When alternating current is stipulated by the relevant standard sheets, the circuit power factor shall be larger than 0,95. To obtain this result, the circuit shall be adjusted by the use of resistors with negligible inductance.

9.3.2 In addition to the criteria of failure prescribed in Part 1, in each of the tests, the sub-miniature fuse-link shall operate satisfactorily without any of the following phenomena:

- fusing together of the contacts or terminations;
- illegibility of marking after test;
- piercing of the external surfaces visible to the naked eye.

The following phenomena are neglected:

- black spots on the sub-miniature fuse-link terminations;
- small deformations of the sub-miniature fuse-link terminations;
- cracking of the sub-miniature fuse-link.

9.4 Endurance tests

9.4.1 Endurance test at normal ambient temperature

Compliance is checked by subjecting the sub-miniature fuse-links to test method A or B as required in the relevant standard sheets.

9.4.2 Test method A

As specified in Part 1, subclause 9.4 a) to d).

9.4.3 Test method B

a) A direct current as specified in the relevant standard sheets is passed through the sub-miniature fuse-link for a period of 100 h. The current stability during the test shall be maintained within ± 1 % of the adjustable value.

A current of $1 I_n$ is then passed through the sub-miniature fuse-link for 1 h.

b) Finally, the voltage drop across the sub-miniature fuse-link is measured again according to subclause 9.1. The voltage drop across the sub-miniature fuse-link at the end of this test is measured and used for the calculation of the maximum sustained power dissipation.

The value measured before the test and shall not exceed the maximum allowed value in the relevant standard sheet.

c) After the test, the marking shall still be legible and soldered joints on end caps etc. shall not show any appreciable deterioration.

9.8 Additional tests (under consideration)

Additional tests under consideration including environmental, physical and electrical characteristics are as follows.

- a) Flammability.
- b) Solderability (IEC Publication 60068-2-20).
- c) Resistance to soldering heat.
- d) Resistance to solvents.
- e) Dielectric withstand voltage.
- f) Environmental test.

Table 1 — **Testing schedule for individual ampere ratings, standard sheets 1 and 2**

Subclause	Description	Sub-miniature fuse-link number																					
		1	4	7	10	13	16	19	22	25	28	31	34	37	40	43	46	49	52	55	58	61	64
9.7	Sub-miniature fuse-link temperature																						
9.4	Endurance tests	X	X																				
9.2.1	Time/current characteristics at 10 I_n						X																
	normal ambient temperature								X														
	4.0 I_n																						
	2.75 I_n																		X				
	2.0 I_n																						X
	1.0 I_n		X																				X
9.3	Breaking capacity					X																	
	Rated breaking capacity																						
	Rated breaking capacity						X																
	5 times the rated current							X															
	5 times the rated current								X														
	10 times the rated current												X										
	10 times the rated current													X									
	50 times the rated current														X								
	50 times the rated current															X							
	250 times the rated current																X						
	250 times the rated current																X						
9.3.3	Insulation resistance					X		X		X		X		X		X		X		X		X	
8.3	Fuse-link terminations	X	X																				
8.5	Soldered joints	X	X								X									X		X	
6.2	Legibility and indelibility of marking									X									X		X	X	

Table 3 — Testing schedule for maximum ampere rating of a homogenous series, standard sheets 1 and 2

Subclause	Description	Fuse-link numbers in decreasing value of voltage drop																			
		1-6	7	10	13-17	18-22	23-32	33	36	39	42	45	48	51	54	55	56				
9.7 ^a	Temperature																				
9.4	Endurance test	X																			
9.2.1 ^a	Time/current characteristics					X															
		10 I_n							X												
		4 I_n									X										
		2,75 I_n										X									
9.3	Rated breaking capacity				X																
9.3.3 ^a	Insulation resistance				X																
8.3	Terminations	X																			
8.5 ^a	Soldered joints	X	X													X					X
6.2 ^a	Legibility and indelibility of marking															X					X

^a Subclause to be found in IEC 60127-1.

Table 4 — Testing schedule for maximum ampere rating of a homogenous series, standard sheets 3 and 4

Subclause	Description	Fuse-link numbers in decreasing value of voltage drop																			
		1-6	7	10	13-17	18-27	28	31	34	37	40	43	46	49							
9.7 ^a	Temperature																				
9.4	Endurance tests	X																			
9.2.2 ^a	Test at elevated temperature ^b			X																	
9.2.1 ^a	Time/current characteristics	10 I _n				X															
		4 I _n						X													
		2,75 I _n									X										
		2,1 I _n													X						X
9.3	Rated breaking capacity						X														
9.3.3 ^a	Insulation resistance						X														
8.3	Terminations			X																	
8.5 ^a	Soldered joints		X												X						X
6.2 ^a	Legibility and indelibility of marking														X						X




^a Subclause to be found in IEC 60127-1.^b Applicable only when specified in the relevant standard sheet.

Table 5 — Testing schedule for minimum ampere rating of a homogeneous series, standard sheets 1 to 4

Subclause	Description	Fuse-link in decreasing value of voltage drop											
		1-6	7	10	13-17	18-22	23-32	33	36				
9.4	Endurance test	X											
9.2.1 ^a	Time/current characteristics		X										
	10 I_n												
	2,0 I_n or 2,1 I_n									X			
9.3	Rated breaking capacity				X								
	a.c.												
	d.c. (if applicable)					X							

^a This subclause is to be found in IEC 60127-1.

42

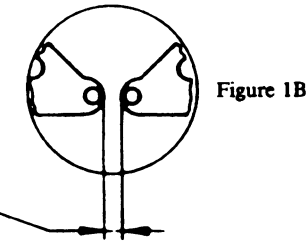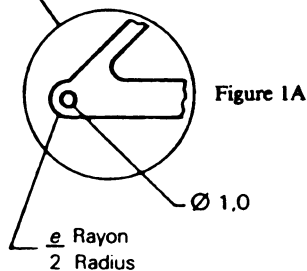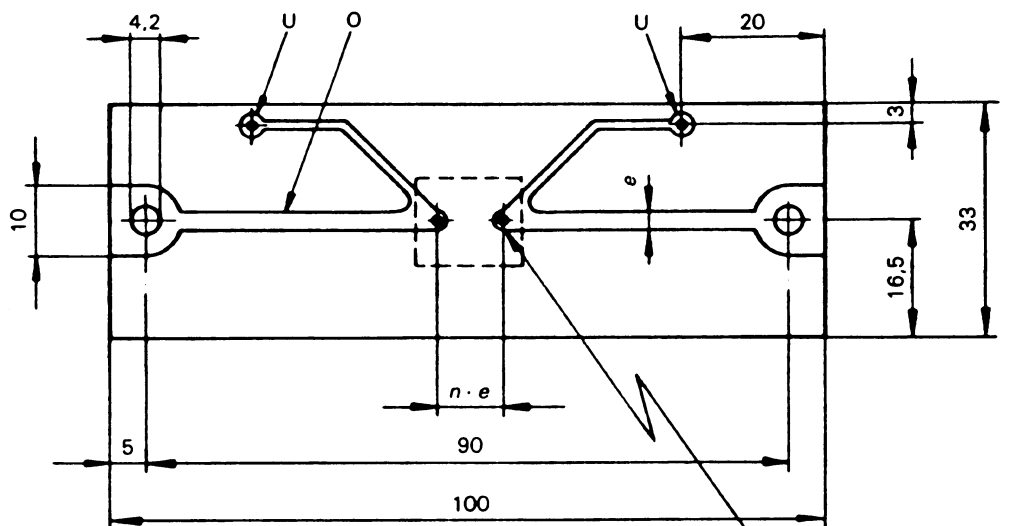

Note. — La zone minimale de passage est à l'étude (applicable lorsque n est inférieur à 2).
 On renvoie également à l'alinéa 2 du paragraphe 8.4.
 Minimum land spacing is under consideration (applicable when n is less than 2).
 Also, reference is made to Sub-clause 8.4, paragraph 2.

157/84

Dimensions en millimètres


Dimensions in millimetres


O = couche de cuivre
 U = connexion pour mesurer la chute de tension
 $e = 2,54$ mm
 $n = 1, 2, 3, 4$ ou 5
Note. — Des socles d'essai améliorés sont à l'étude.

O = copper layer
 U = connection for voltage drop measurement
 $e = 2.54$ mm
 $n = 1, 2, 3, 4$ or 5
Note. — Improved fuse-bases for testing are under consideration.


**Figure 1— Standard printed wiring test board
 (for rated currents up to 5 A) (see Subclause 7.3)**

Licensed Copy: Sun Yat-Sen University User, Sun Yat-Sen University, Mon Sep 26 09:15:37 BST 2005, Uncontrolled Copy, (c) BSI

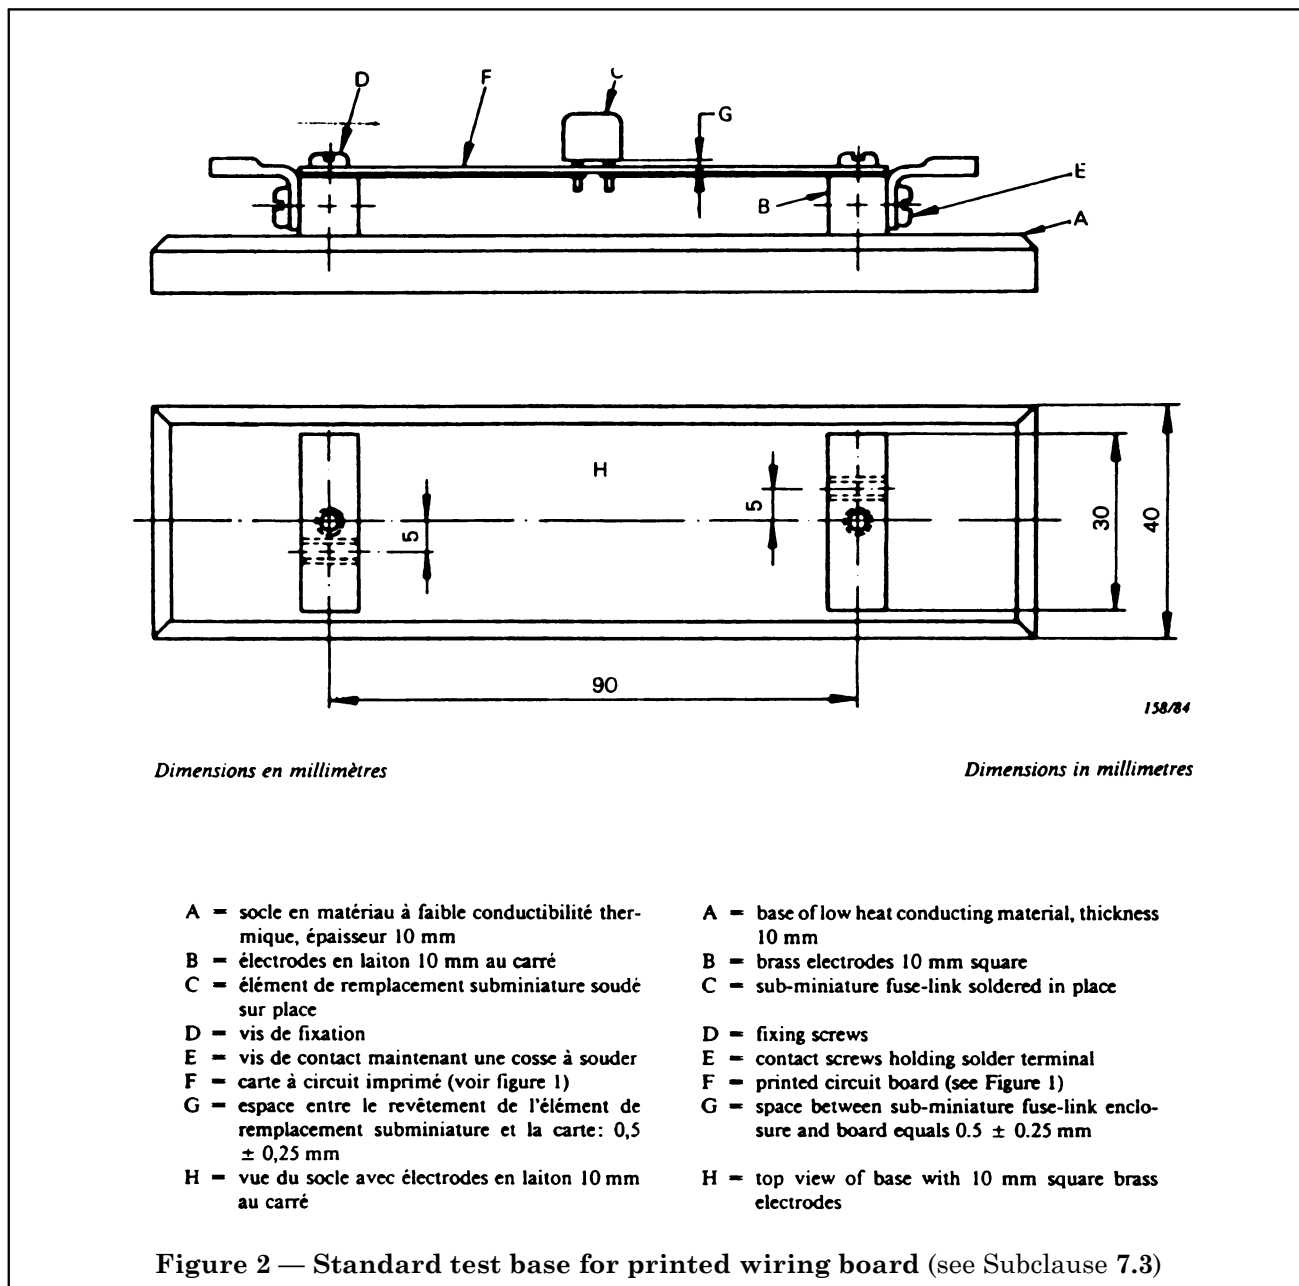

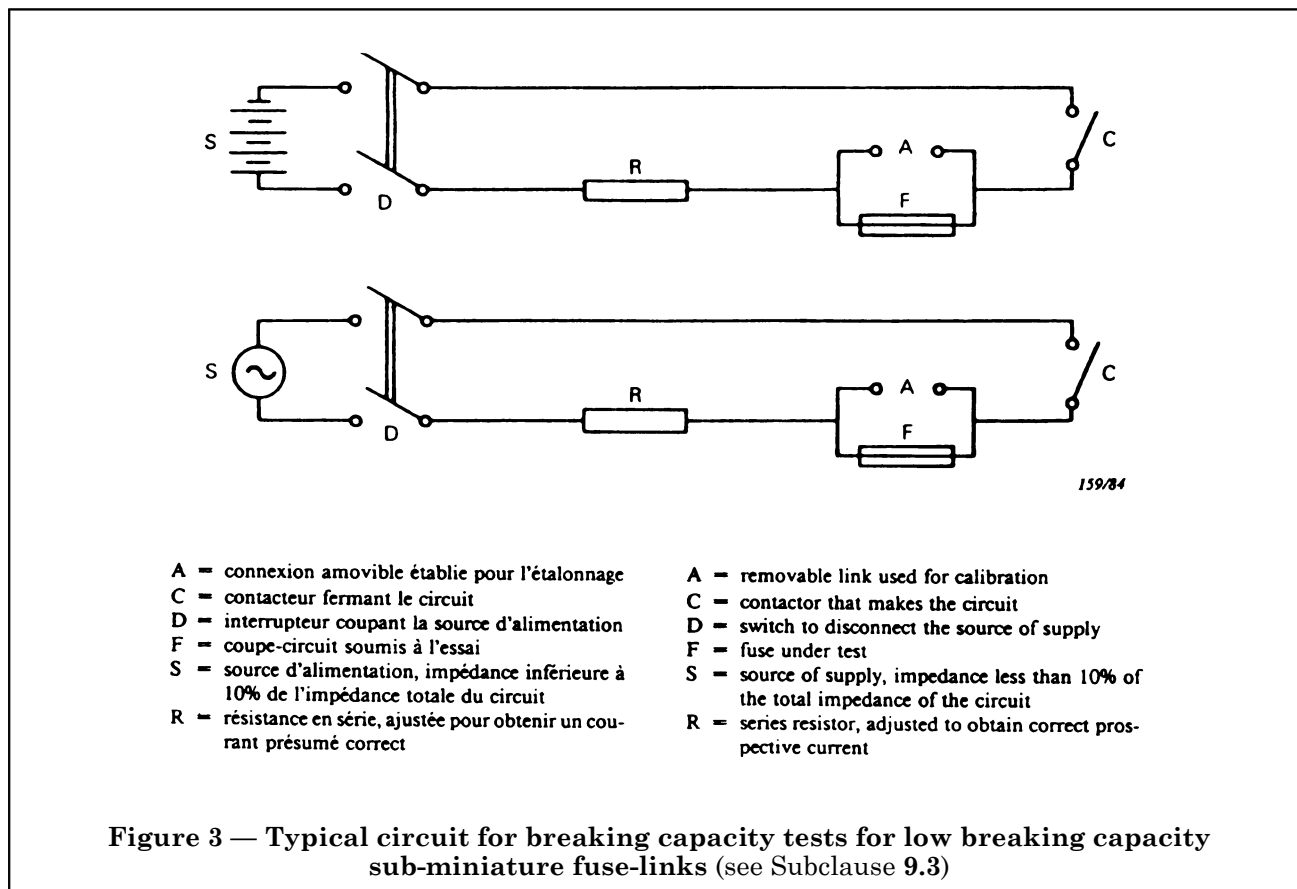

Section 2. Standard sheets

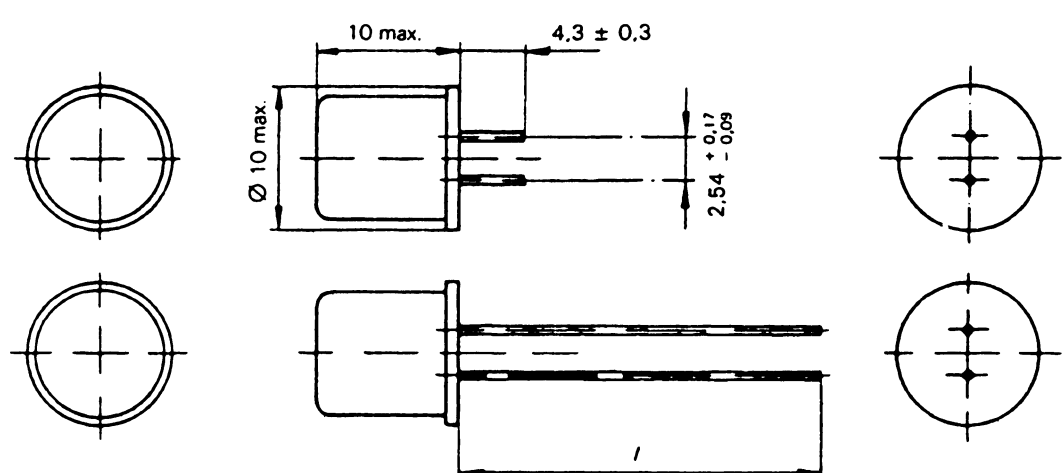	Sub-miniature fuse-links Quick-acting, low breaking capacity	Standard Sheet 1 Page 1																																																																																							
<p><i>Dimensions in millimetres</i></p>  <p style="text-align: right;"><i>IEC 879/91</i></p>																																																																																									
<p><i>Terminations</i></p> <p>a) The length <i>l</i> of the terminations may be adapted for a lead taping type of packaging.</p> <p>b) The termination must go through a 1 mm hole and have a rated minimum cross-sectional area of 0,150 mm².</p> <p>c) The cross-sectional shape of the termination is optional.</p>																																																																																									
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="width: 15%;">Rated current*</th> <th style="width: 15%;">Rated voltage</th> <th style="width: 15%;">Maximum voltage drop</th> <th style="width: 15%;">Maximum sustained dissipation</th> </tr> <tr> <td></td> <td>V</td> <td>mV</td> <td>mW**</td> </tr> </thead> <tbody> <tr><td>2 mA</td><td rowspan="20" style="vertical-align: middle;">125</td><td>6 000</td><td>14</td></tr> <tr><td>5 mA</td><td>3 000</td><td>17</td></tr> <tr><td>10 mA</td><td>2 200</td><td>25</td></tr> <tr><td>16 mA</td><td>1 500</td><td>27</td></tr> <tr><td>32 mA</td><td>1 500</td><td>53</td></tr> <tr><td>50 mA</td><td>1 000</td><td>55</td></tr> <tr><td>63 mA</td><td>1 000</td><td>70</td></tr> <tr><td>80 mA</td><td>1 000</td><td>88</td></tr> <tr><td>100 mA</td><td>1 000</td><td>110</td></tr> <tr><td>125 mA</td><td>1 000</td><td>138</td></tr> <tr><td>160 mA</td><td>1 000</td><td>176</td></tr> <tr><td>200 mA</td><td>700</td><td>140</td></tr> <tr><td>250 mA</td><td>700</td><td>193</td></tr> <tr><td>315 mA</td><td>700</td><td>243</td></tr> <tr><td>400 mA</td><td>400</td><td>176</td></tr> <tr><td>500 mA</td><td>400</td><td>220</td></tr> <tr><td>630 mA</td><td>400</td><td>277</td></tr> <tr><td>800 mA</td><td>400</td><td>372</td></tr> <tr><td>1 A</td><td>190</td><td>209</td></tr> <tr><td>1,25 A</td><td>190</td><td>261</td></tr> <tr><td>1,6 A</td><td>190</td><td>334</td></tr> <tr><td>2 A</td><td>190</td><td>418</td></tr> <tr><td>2,5 A</td><td>190</td><td>523</td></tr> <tr><td>3,15 A</td><td>190</td><td>658</td></tr> <tr><td>4 A</td><td>190</td><td>836</td></tr> <tr><td>5 A</td><td>190</td><td>1 045</td></tr> </tbody> </table>			Rated current*	Rated voltage	Maximum voltage drop	Maximum sustained dissipation		V	mV	mW**	2 mA	125	6 000	14	5 mA	3 000	17	10 mA	2 200	25	16 mA	1 500	27	32 mA	1 500	53	50 mA	1 000	55	63 mA	1 000	70	80 mA	1 000	88	100 mA	1 000	110	125 mA	1 000	138	160 mA	1 000	176	200 mA	700	140	250 mA	700	193	315 mA	700	243	400 mA	400	176	500 mA	400	220	630 mA	400	277	800 mA	400	372	1 A	190	209	1,25 A	190	261	1,6 A	190	334	2 A	190	418	2,5 A	190	523	3,15 A	190	658	4 A	190	836	5 A	190	1 045
Rated current*	Rated voltage	Maximum voltage drop	Maximum sustained dissipation																																																																																						
	V	mV	mW**																																																																																						
2 mA	125	6 000	14																																																																																						
5 mA		3 000	17																																																																																						
10 mA		2 200	25																																																																																						
16 mA		1 500	27																																																																																						
32 mA		1 500	53																																																																																						
50 mA		1 000	55																																																																																						
63 mA		1 000	70																																																																																						
80 mA		1 000	88																																																																																						
100 mA		1 000	110																																																																																						
125 mA		1 000	138																																																																																						
160 mA		1 000	176																																																																																						
200 mA		700	140																																																																																						
250 mA		700	193																																																																																						
315 mA		700	243																																																																																						
400 mA		400	176																																																																																						
500 mA		400	220																																																																																						
630 mA		400	277																																																																																						
800 mA		400	372																																																																																						
1 A		190	209																																																																																						
1,25 A		190	261																																																																																						
1,6 A	190	334																																																																																							
2 A	190	418																																																																																							
2,5 A	190	523																																																																																							
3,15 A	190	658																																																																																							
4 A	190	836																																																																																							
5 A	190	1 045																																																																																							
<p>* Intermediate values shall be chosen from the R 20 or R 40 series.</p> <p>** Measured after 1 h at 1 <i>I_n</i>.</p>																																																																																									

Sub-miniature fuse-links
Quick-acting, low breaking capacity

**Standard
Sheet 1**
Page 2

Marking

Sub-miniature fuse-links shall be marked with:

- a) rated current
- b) rated voltage
- c) manufacturer's name or trade mark

Pre-arcing time/current characteristic

The pre-arcing time shall be within the following limits:

Rated current	I_n	$2 I_n$	$2,75 I_n$	$4 I_n$	$10 I_n$
	minimum	maximum	maximum	maximum	maximum
2 mA to 5 A inclusive	4 h	5 s	300 ms	30 ms	4 ms

Breaking capacity

Rated breaking capacity: 50 A, tested with a.c. and d.c. using the circuit given in Figure 3 for the breaking capacity test.

Endurance test

100 h minimum at a continuous current of 0,8 times the rated current, according to test method B of subclause 9.4.3.

Sub-miniature fuse-link contact test

The contact leads shall be evaluated in accordance with subclause 8.3 for:

- a) tensile
- b) thrust
- c) bending (applicable only if the length of the terminations is over 5 mm)

Sub-miniature fuse-link temperature-rise test

The initial current according to subclause 9.7 shall be I_n .

NOTE 1 For design information relative to minimum spacing between conductive tracks, refer to the second paragraph of subclause 8.4.

NOTE 2 The maximum operating ambient temperature is +85 °C. When the sub-miniature fuse-link is operating under these conditions the current load should be reduced to 0,9 I_n .

Sub-miniature fuse-links Quick-acting, low breaking capacity		Standard Sheet 2 Page 1	
<p style="text-align: right;">NOTE - Optional insulating sleeve</p> <p style="text-align: right;">IEC 95694</p>			
<i>Dimensions in millimetres</i>			
<i>Terminations</i>			
a) The termination must go through a 1 mm hole and have a rated minimum cross-sectional area of 0,150 mm ² .			
b) The cross-sectional shape of the termination is optional.			
Rated current*	Rated voltage V	Maximum voltage drop mV	Maximum sustained dissipation mW**
50 mA	125	2 250	123
63 mA		2 230	154
80 mA		2 200	194
100 mA		1 750	193
125 mA		1 500	206
160 mA		1 500	264
200 mA		1 500	330
250 mA		1 000	275
315 mA		1 000	347
400 mA		1 000	440
500 mA		1 000	550
630 mA		500	347
800 mA		275	242
1 A		275	303
1,25 A		275	378
1,6 A		275	484
2 A		250	550
2,5 A		250	688
3,15 A		250	866
4 A		225	990
5 A	225	1 238	
* Intermediate values shall be chosen from the R 20 or R 40 series.			
** Measured after 1 h at 1 I _n .			

Sub-miniature fuse-links
Quick-acting, low breaking capacity

**Standard
Sheet 2**
Page 2

Marking

Sub-miniature fuse-links shall be marked with:

- a) rated current
- b) manufacturer's name or trade mark

NOTE Where colour bands are used, the values for d and s shall be $0,4 \begin{smallmatrix} +0,1 \\ -0 \end{smallmatrix}$ mm.

Pre-arcing time/current characteristic

The pre-arcing time shall be within the following limits:

Rated current	I_n	$2 I_n$	$2,75 I_n$	$4 I_n$	$10 I_n$
	minimum	maximum	maximum	maximum	maximum
50 mA to 5 A inclusive	4 h	5 s	300 ms	30 ms	4 ms

Breaking capacity

Rated breaking capacity: 50 A, tested with a.c. and d.c. using the circuit given in Figure 3 for the breaking capacity test.

Endurance test

100 h minimum at a continuous current of 0,8 times the rated current, according to test method B of subclause 9.4.3.

Sub-miniature fuse-link contact test

The contact leads shall be evaluated in accordance with subclause 8.3 for:

- a) tensile
- b) bending

Sub-miniature fuse-link temperature-rise test

The initial current according to subclause 9.7 shall be I_n .

NOTE The maximum operating ambient temperature is +85 °C. When the sub-miniature fuse-link is operating under these conditions the current load should be reduced to $0.9 I_n$.

	Sub-miniature fuse-links Quick-acting, low breaking capacity	Standard Sheet 3 Page 1																																																																								
<p><i>Dimensions in millimetres</i></p>																																																																										
<p><i>Terminations</i></p> <p>a) The length <i>l</i> of the terminations may be adapted for a lead taping type of packaging.</p> <p>b) The termination must go through a 1 mm hole and have a rated minimum cross-sectional area of 0,150 mm².</p> <p>c) The cross-sectional shape of the termination is optional.</p>																																																																										
IEC 881191																																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Rated current*</th> <th style="text-align: center;">Rated voltage</th> <th style="text-align: center;">Maximum voltage drop</th> <th style="text-align: center;">Maximum sustained dissipation</th> </tr> <tr> <th></th> <th style="text-align: center;">V</th> <th style="text-align: center;">mV</th> <th style="text-align: center;">mW**</th> </tr> </thead> <tbody> <tr><td>50 mA</td><td rowspan="16" style="text-align: center;">250</td><td>850</td><td>112</td></tr> <tr><td>63 mA</td><td>750</td><td>124</td></tr> <tr><td>80 mA</td><td>650</td><td>137</td></tr> <tr><td>100 mA</td><td>600</td><td>158</td></tr> <tr><td>125 mA</td><td>550</td><td>180</td></tr> <tr><td>160 mA</td><td>500</td><td>210</td></tr> <tr><td>200 mA</td><td>480</td><td>252</td></tr> <tr><td>250 mA</td><td>440</td><td>289</td></tr> <tr><td>315 mA</td><td>400</td><td>331</td></tr> <tr><td>400 mA</td><td>370</td><td>389</td></tr> <tr><td>500 mA</td><td>350</td><td>459</td></tr> <tr><td>630 mA</td><td>320</td><td>529</td></tr> <tr><td>800 mA</td><td>300</td><td>630</td></tr> <tr><td>1 A</td><td>280</td><td>735</td></tr> <tr><td>1,25 A</td><td>280</td><td>919</td></tr> <tr><td>1,6 A</td><td>250</td><td>1 050</td></tr> <tr><td>2 A</td><td>240</td><td>1 260</td></tr> <tr><td>2,5 A</td><td>200</td><td>1 313</td></tr> <tr><td>3,15 A</td><td>180</td><td>1 488</td></tr> <tr><td>4 A</td><td>160</td><td>1 680</td></tr> <tr><td>5 A</td><td>150</td><td>1 969</td></tr> </tbody> </table>			Rated current*	Rated voltage	Maximum voltage drop	Maximum sustained dissipation		V	mV	mW**	50 mA	250	850	112	63 mA	750	124	80 mA	650	137	100 mA	600	158	125 mA	550	180	160 mA	500	210	200 mA	480	252	250 mA	440	289	315 mA	400	331	400 mA	370	389	500 mA	350	459	630 mA	320	529	800 mA	300	630	1 A	280	735	1,25 A	280	919	1,6 A	250	1 050	2 A	240	1 260	2,5 A	200	1 313	3,15 A	180	1 488	4 A	160	1 680	5 A	150	1 969
Rated current*	Rated voltage	Maximum voltage drop	Maximum sustained dissipation																																																																							
	V	mV	mW**																																																																							
50 mA	250	850	112																																																																							
63 mA		750	124																																																																							
80 mA		650	137																																																																							
100 mA		600	158																																																																							
125 mA		550	180																																																																							
160 mA		500	210																																																																							
200 mA		480	252																																																																							
250 mA		440	289																																																																							
315 mA		400	331																																																																							
400 mA		370	389																																																																							
500 mA		350	459																																																																							
630 mA		320	529																																																																							
800 mA		300	630																																																																							
1 A		280	735																																																																							
1,25 A		280	919																																																																							
1,6 A		250	1 050																																																																							
2 A	240	1 260																																																																								
2,5 A	200	1 313																																																																								
3,15 A	180	1 488																																																																								
4 A	160	1 680																																																																								
5 A	150	1 969																																																																								
<p>* Intermediate values shall be chosen from the R 20 or R 40 series.</p> <p>** Measured after 1 h at 1,5 <i>I_n</i>.</p>																																																																										

Sub-miniature fuse-links
Quick-acting, low breaking capacity

**Standard
Sheet 3**
Page 2

Marking

Sub-miniature fuse-links shall be marked with:

- a) rated current
- b) rated voltage
- c) manufacturer's name or trade mark
- d) characteristic symbol F

Pre-arcing time/current characteristic

The pre-arcing time shall be within the following limits:

Rated current	2,1 I_n	2,75 I_n		4 I_n		10 I_n
	maximum	minimum	maximum	minimum	maximum	maximum
50 mA at 5 A inclusive	30 min	10 ms	3 s	3 ms	300 ms	20 ms

Breaking capacity

Rated breaking capacity: 35 A or 10 I_n whichever is greater, tested with a.c. using the circuit given in Figure 3 for the breaking capacity test.

Endurance test

100 cycles at rated current according to test method A of subclause 9.4.2 followed by 1 h at 1,5 times the rated current.

Sub-miniature fuse-link contact test

The contact leads shall be evaluated in accordance with subclause 8.3 for:

- a) tensile
- b) thrust
- c) bending (applicable only if the length of the terminations is over 5 mm)

Sub-miniature fuse-link temperature-rise test

The initial current according to subclause 9.7 shall be 1,5 I_n .

NOTE The maximum operating ambient temperature is +85 °C. When the sub-miniature fuse-link is operating under these conditions the current load should be reduced to 0,9 I_n .

		Sub-miniature fuse-links Time lag, low breaking capacity	Standard Sheet 4 Page 1																																																																				
<i>Dimensions in millimetres</i>																																																																							
<i>Terminations</i>																																																																							
<p>a) The length l of the terminations may be adapted for a lead taping type of packaging.</p> <p>b) The termination shall go through a 1 mm hole and have a rated minimum cross-sectional area of 0,150 mm².</p> <p>c) The cross-sectional shape of the termination is optional.</p>																																																																							
<table border="1"> <thead> <tr> <th>Rated current*</th> <th>Rated voltage V</th> <th>Maximum voltage drop mV</th> <th>Maximum sustained dissipation mW**</th> </tr> </thead> <tbody> <tr><td>40 mA</td><td rowspan="19" style="text-align: center;">250</td><td>600</td><td>150</td></tr> <tr><td>50 mA</td><td>550</td><td>155</td></tr> <tr><td>63 mA</td><td>480</td><td>160</td></tr> <tr><td>80 mA</td><td>400</td><td>165</td></tr> <tr><td>100 mA</td><td>350</td><td>170</td></tr> <tr><td>125 mA</td><td>300</td><td>180</td></tr> <tr><td>160 mA</td><td>280</td><td>190</td></tr> <tr><td>200 mA</td><td>260</td><td>200</td></tr> <tr><td>250 mA</td><td>240</td><td>220</td></tr> <tr><td>315 mA</td><td>220</td><td>250</td></tr> <tr><td>400 mA</td><td>200</td><td>280</td></tr> <tr><td>500 mA</td><td>190</td><td>310</td></tr> <tr><td>630 mA</td><td>180</td><td>360</td></tr> <tr><td>800 mA</td><td>160</td><td>430</td></tr> <tr><td>1 A</td><td>140</td><td>500</td></tr> <tr><td>1,25 A</td><td>130</td><td>600</td></tr> <tr><td>1,6 A</td><td>120</td><td>730</td></tr> <tr><td>2 A</td><td>100</td><td>870</td></tr> <tr><td>2,5 A</td><td>100</td><td>1 000</td></tr> <tr><td>3,15 A</td><td>100</td><td>1 200</td></tr> <tr><td>4 A</td><td>100</td><td>1 400</td></tr> </tbody> </table>				Rated current*	Rated voltage V	Maximum voltage drop mV	Maximum sustained dissipation mW**	40 mA	250	600	150	50 mA	550	155	63 mA	480	160	80 mA	400	165	100 mA	350	170	125 mA	300	180	160 mA	280	190	200 mA	260	200	250 mA	240	220	315 mA	220	250	400 mA	200	280	500 mA	190	310	630 mA	180	360	800 mA	160	430	1 A	140	500	1,25 A	130	600	1,6 A	120	730	2 A	100	870	2,5 A	100	1 000	3,15 A	100	1 200	4 A	100	1 400
Rated current*	Rated voltage V	Maximum voltage drop mV	Maximum sustained dissipation mW**																																																																				
40 mA	250	600	150																																																																				
50 mA		550	155																																																																				
63 mA		480	160																																																																				
80 mA		400	165																																																																				
100 mA		350	170																																																																				
125 mA		300	180																																																																				
160 mA		280	190																																																																				
200 mA		260	200																																																																				
250 mA		240	220																																																																				
315 mA		220	250																																																																				
400 mA		200	280																																																																				
500 mA		190	310																																																																				
630 mA		180	360																																																																				
800 mA		160	430																																																																				
1 A		140	500																																																																				
1,25 A		130	600																																																																				
1,6 A		120	730																																																																				
2 A		100	870																																																																				
2,5 A		100	1 000																																																																				
3,15 A	100	1 200																																																																					
4 A	100	1 400																																																																					
* Intermediate values shall be chosen from the R 20 or R 40 series.																																																																							
** Measured after 1 h at 1,5 I_n .																																																																							

Sub-miniature fuse-links
Time lag, low breaking capacity

**Standard
Sheet 4
Page 2**

Marking

Sub-miniature fuse-links shall be marked with:

- a) rated current
- b) rated voltage
- c) manufacturer's name or trade mark
- d) characteristic symbol T

Pre-arcing time/current characteristic

The pre-arcing time/current shall be within the following limits:

Rated current	2,1 I_n	2,75 I_n		4 I_n		10 I_n	
	maximum	minimum	maximum	minimum	maximum	minimum	maximum
40 mA to 4 A inclusive	2 min	400 ms	10 s	150 ms	3 s	20 ms	150 ms

Test at a temperature of 70 ± 2 °C.

A current of $1,0 I_n$ shall be passed through the sub-miniature fuse-links for 1 h and they shall not operate.

Breaking capacity

Rated breaking capacity: 35 A or $10 I_n$ whichever is greater, tested with a.c. using the circuit given in Figure 3 for the breaking capacity test.

Endurance test

100 cycles at rated current according to test method A of subclause 9.4.2 followed by 1 h at 1,5 times the rated current.

Sub-miniature fuse-link contact test

The contact leads shall be evaluated in accordance with subclause 8.3 for:

- a) tensile
- b) thrust
- c) bending (applicable only if the length of the terminations is over 5 mm)

Sub-miniature fuse-link temperature-rise test

The initial current according to subclause 9.7 shall be $1,5 I_n$.

NOTE The maximum operating ambient temperature is +85 °C. When the sub-miniature fuse-link is operating under these conditions the current load should be reduced to $0,9 I_n$.

Annex ZA (normative)**Normative references to international publications with their corresponding European publications**

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

Publication	Year	Title	EN/HD	Year
IEC 60068-2-20	1979	<i>Basic environmental testing procedures Part 2: Tests — Test T: Soldering</i>	HD 323.2.20 S3 ¹⁾	1988
IEC 60068-2-21	1983	<i>Test U: Robustness of terminations and integral mounting devices</i>	HD 323.2.21 S3 ²⁾	1988
IEC 60695	series	<i>Fire hazard testing</i>	EN 60695	series

¹⁾ HD 323.2.20 S3 includes A2:1987 to IEC 60068-2-20.

²⁾ HD 323.2.21 S3 includes A1:1985 to IEC 60068-2-21.

BS EN
60127-3:1996
IEC 60127-3:1988
+ A1:1991

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.

Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.

BSI
389 Chiswick High Road
London
W4 4AL