




**BOOST CONVERT CONTROL IC**
**GENERAL DESCRIPTION**



The **FP5138** is a boost topology switching regulator control IC for battery-used applications field. The FP5138 includes a totem-pole single output stage for driving NPN transistor or N-MOS, high precision reference (0.5V) for comparing output voltage with feedback amplifier, an internal dead-time control for controlling the minimum duty cycle, programmable soft start with short circuit protection function and logic level control for operating mode or standby mode.

**FEATURES**

- Wide supply voltage operating range: 1.8 to 15V
- Reference voltage precision: 4%
- Low current consumption: Operation Mode 5.5mA  
Standby-by Mode 1 $\mu$ A
- High speed oscillator frequency: 1MHz max.
- Programmable Soft Start function (SS)
- Short Circuit Protection function(SCP)
- Totem-pole output with adjustable on/off current  
(for NPN transistors or n-channel MOSFET)
- Logic level control stand-by mode function
- Package: SOP8/TSSOP8/MSOP8/SOP8(EP)


**SOP8**

**TSSOP8**

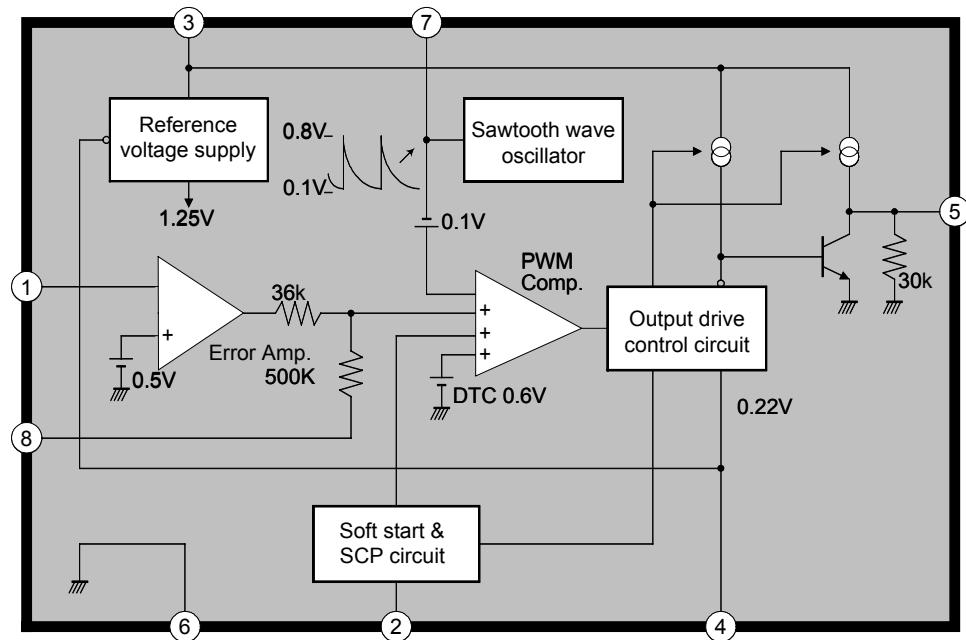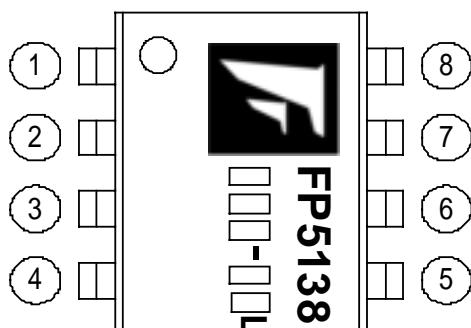**MSOP8**
**TYPICAL APPLICATION**


- Digital Camera
- PDA
- Portable Equipment

**FUNCTIONAL BLOCK DIAGRAM**

**MARK VIEW**

**PIN DESCRIPTION**

Name	No.	I/O	Description
FB	1	I	Error amplifier inverting input pin
SCP	2	I	Connected a capacitor Soft start and SCP function pin
V <sub>CC</sub>	3	P	IC power supply
BR/CTL	4	I	Output current setting and control pin
OUT	5	O	Totem-pole output
GND	6	P	IC ground
OSC	7	I	Capacitor and resistor connected for the frequency of oscillation
COMP	8	O	Error amplifier compensation output

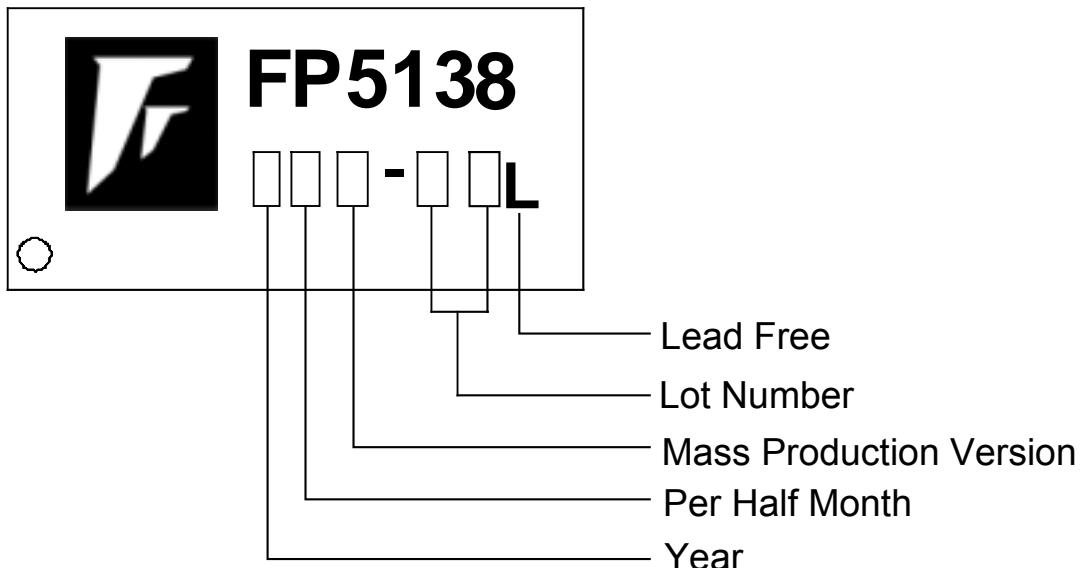**ORDER INFORMATION**

Part Number	Operating Temperature	Package	Description
FP5138D-LF	-10°C ~ +85°C	SOP8	Tube
FP5138DR-LF	-10°C ~ +85°C	SOP8	Tape & Reel
FP5138W-LF	-10°C ~ +85°C	TSSOP8	Tube
FP5138WR-LF	-10°C ~ +85°C	TSSOP8	Tape & Reel
FP5138T-LF	-10°C ~ +85°C	MSOP8	Tube
FP5138TR-LF	-10°C ~ +85°C	MSOP8	Tape & Reel
FP5138X-LF	-10°C ~ +85°C	SOP8-EXPOSED PAD	Tube
FP5138XR-LF	-10°C ~ +85°C	SOP8-EXPOSED PAD	Tape & Reel

**IC DATE CODE DISTINGUISH**

**FOR EXAMPLE:**

January	A (Front Half Month), B (Last Half Month)
February	C, D
March	E, F
	-----And so on

Lot Number is the last two numbers

**For Example:**

A3311C62

→ Lot Number

**ABSOLUTE MAXIMUM RATINGS**

Power supply voltage ----- +15V

Output source current ----- -50mA

Output sink current ----- +50mA

## Allowable dissipation

SOP8 Ta +25 ----- 570mW

MSOP8 Ta +25 ----- 400mW

TSSOP8 Ta +25 ----- 400mW

SOP8-EXPOSED PAD Ta +25 ----- 600mW


Operating temperature ----- -10 +85

Storage temperature ----- -55 +125

SOP8 Lead Temperature (soldering, 10 sec) ----- +260

TSSOP8 Lead Temperature (soldering, 10 sec) ----- +260

MSOP8 Lead Temperature (soldering, 10 sec) ----- +260

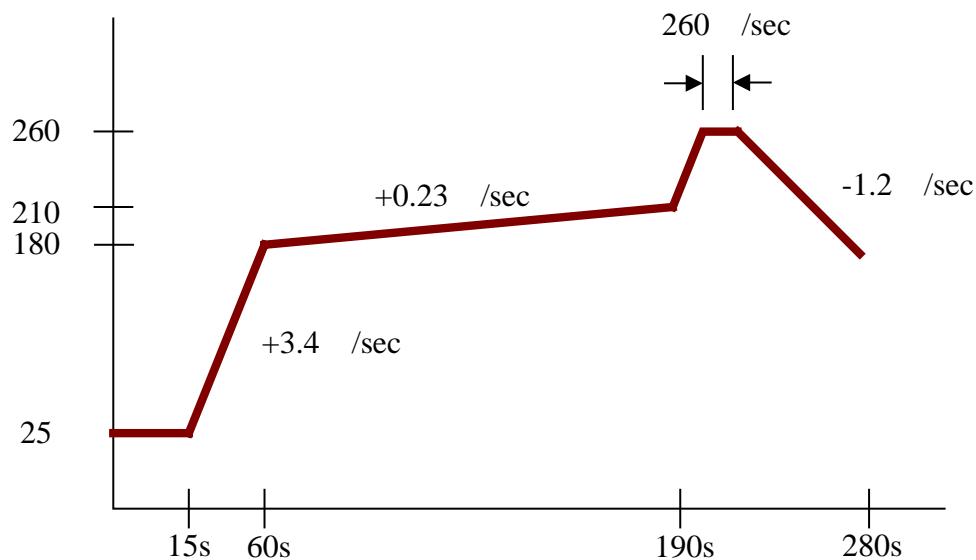

**DC ELECTRICAL CHARACTERISTICS** ( $T_a=25^\circ C$ ,  $V_{CC}=2V$ , unless otherwise noted)

**Under Voltage Lock-Out section (U.V.L.O.)**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Low threshold voltage	$V_{LOW}$	--	-	-	0.9	V
Upper threshold voltage	$V_{UPPER}$	--	1.1	1.3	1.5	V

**Soft Start section (S.S.)**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input source current	$I_{SS}$	$V_{SCP}= 0V$	-1.5	-1.0	-0.7	$\mu A$
Soft start threshold voltage	$V_{SST}$	--	0.8	0.9	1.0	V

**Short Circuit Protection section (S.C.P.)**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input source current	$I_{SCP}$	$V_{SCP}= 0V$	-1.5	-1.0	-0.7	$\mu A$
S.C.P. threshold voltage	$V_{SCP}$	--	0.7	0.8	0.9	V

**Oscillator section**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Oscillation frequency	f	$R_T=3.0k\Omega, C_T=270pF$	400	500	600	KHz
Frequency change with voltage	$\Delta f / \Delta V$	$V_{CC}=2V$ to $15V$	-	2	10	%
Frequency change with temperature	$\Delta f / \Delta T$	$T_a = 0^\circ C$ to $85^\circ C$	-	5	-	%

**Idle Period Adjustment section**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Maximum duty cycle	$T_{DUTY}$	$R_T=3.0k\Omega, C_T=270pF, V_{FB}=0.8V$	75	-	85	%

**Total device section**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Stand-by current	$I_{STANDBY}$	Pin4 is open or $V_{CC}$	-	-	1	$\mu A$
Average supply current	$I_{AVE}$	$R_B=390\Omega, V_{CC}=0\sim 20V$	-	5.0	10	mA

**DC ELECTRICAL CHARACTERISTICS (Cont.)**
**Error Amplifier section**

PARAMETER		SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input threshold voltage	$V_{FB}$		$V_{COMP}=450mV$	495	500	505	mV
$V_T$ change with voltage	$\Delta V_{FB} / \Delta V$		$V_{CC}=2V$ to $15V$	-	5	20	mV
$V_T$ change with temperature	$\Delta V_{FB} / \Delta T$		$T_a = -10$ to $85$	-	1	-	%
Input bias current	$I_B$		--	-1.0	-0.2	1.0	$\mu A$
Voltage Gain	$A_V$		--	-	100	-	V/V
Frequency bandwidth	BW		$A_v=0$ dB	-	6	-	MHz
Output voltage Swing	Positive Negative	$V_{POS}$ $V_{NEG}$	--	0.78	0.87	-	V
Output source current	$I_{SOURCE}$		$V_{COMP}=450mV$	-	-40	-24	$\mu A$
Output sink current	$I_{SINK}$			24	40	-	$\mu A$

**Output section**

PARAMETER		SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output high voltage	$V_{OH1}$		$R_B=390\Omega$ , $I_O=-15mA$	1.0	1.2	-	V
Output high voltage	$V_{OH2}$		$R_B=750\Omega$ , $I_O=-10mA$ , $V_{CC}= 1.8V$	0.8	1.0	-	V
Output saturation voltage	$V_{OL1}$		$R_B=390\Omega$ , $I_O=15mA$	-	0.1	0.2	V
Output saturation voltage	$V_{OL2}$		$R_B=750\Omega$ , $I_O=10mA$ , $V_{CC}= 1.8V$	-	0.1	0.2	V
Output source current	$I_{OSOURCE}$		$R_B=390\Omega$ , $V_o=0.9V$	-	-40	-20	mA
Output sink current	$I_{OSINK}$		$R_B=390\Omega$ , $V_o=0.3V$	30	40	-	mA
Internal pull-down resistor	$R_O$		--	20	30	40	k $\Omega$

**Output Current Setting / Control section**

PARAMETER		SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Pin voltage	$V_{BR}$		$R_B=390\Omega$	0.15	0.22	0.3	V
Input off condition	$I_{OFF}$		--	-20	-	0	$\mu A$
Input on condition	$I_{ON}$		--	-	-	-45	$\mu A$
Pin current range	$I_{BR}$		--	-1.8	-	-0.1	mA

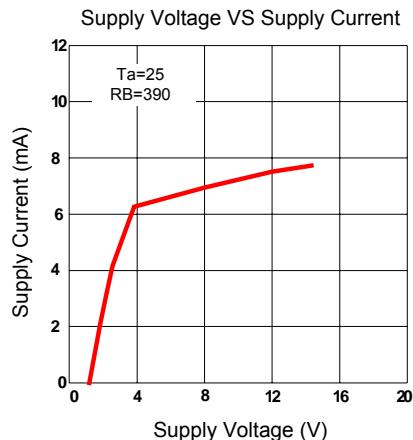
**TYPICAL CHARACTERISTICS**


Figure 1

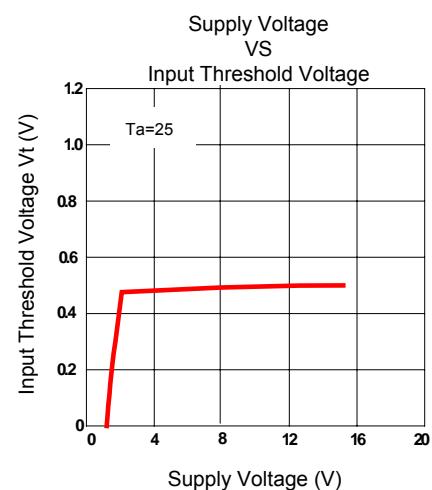


Figure 2

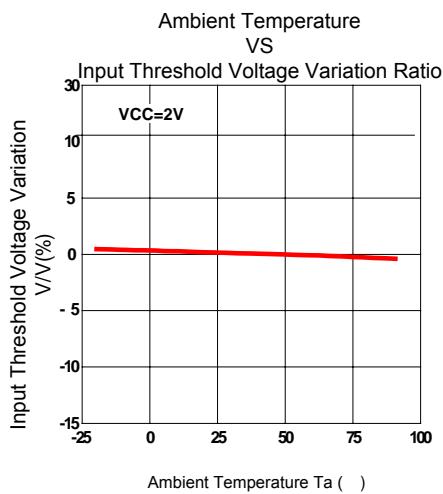


Figure 3

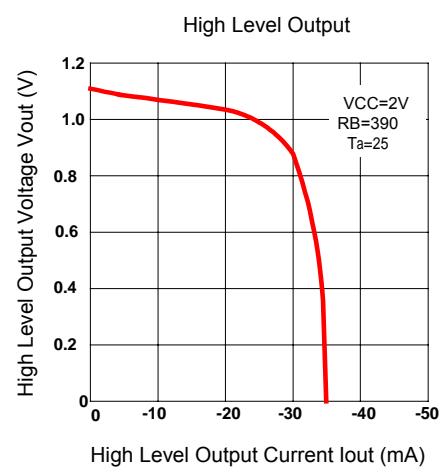


Figure 4

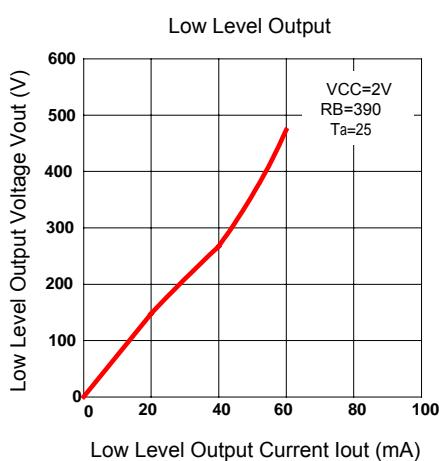


Figure 5

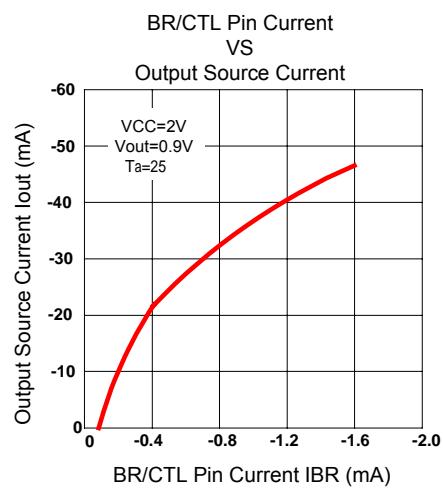


Figure 6

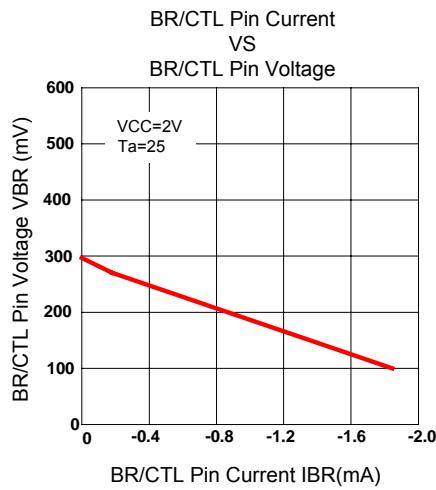
**TYPICAL CHARACTERISTICS (Cont.)**


Figure 7

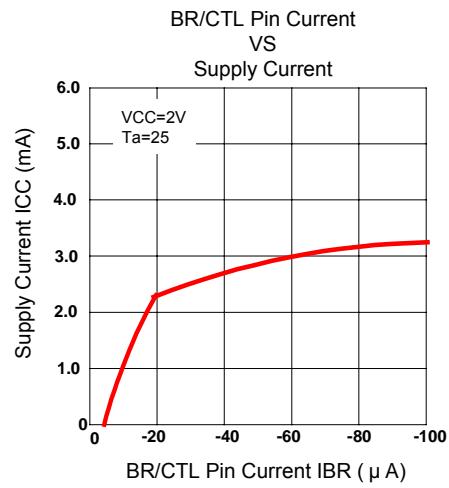


Figure 8

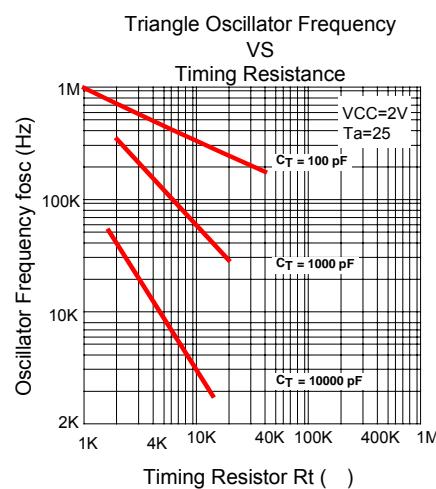


Figure 9

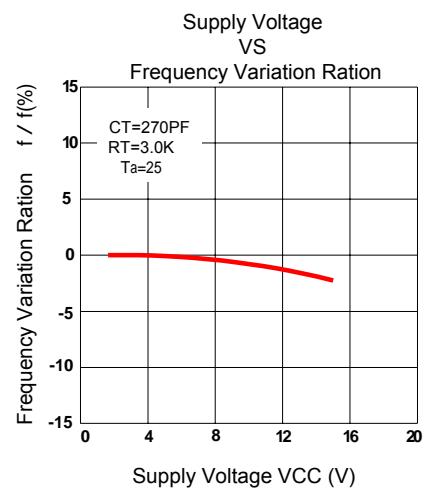


Figure 10

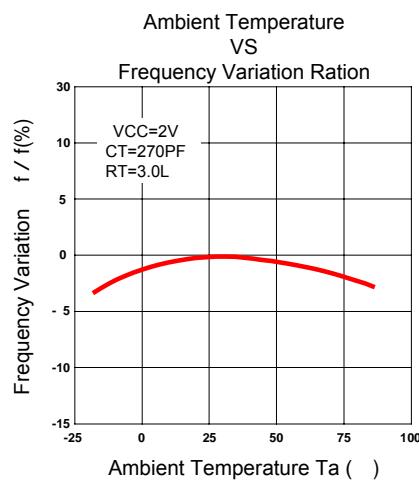
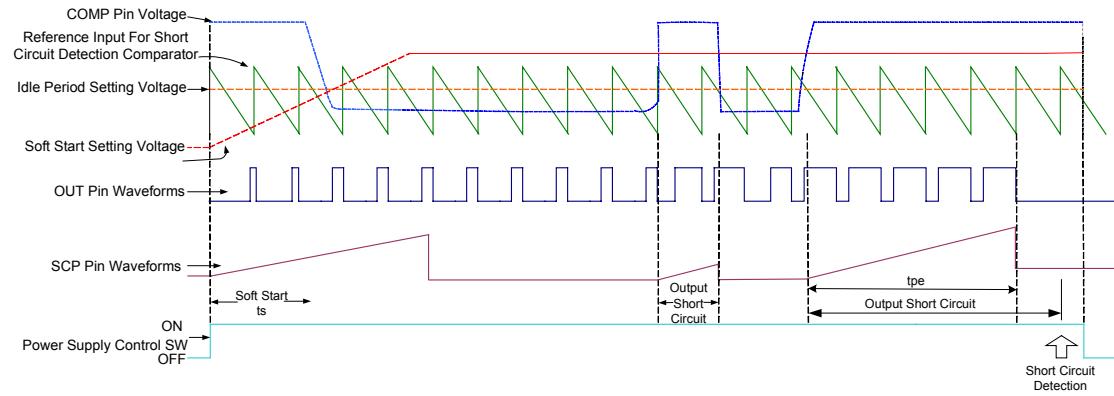


Figure 11

**TIMING WAVEFORM**

**FP5138 Timing Diagram**

## DETAILED DESCRIPTION


### Voltage reference

A 1.25V regulator operating from VCC is used to power the internal circuitry of the **FP5138**. An internal resistive divider provides 0.5V reference for the error amplifier, Soft-start (typ. 0.9V) and SCP (typ. 0.8V) circuits.

### Error amplifier

The error amplifier compares a sample of the dc-dc converter output voltage to the 0.5V reference and generates an error signal for the PWM comparator. Output voltage of dc-dc converter is setting with the resistor divider using the following expression (see fig12):

$$V_{out} = \left(1 + \frac{R1}{R2}\right) * 0.5$$

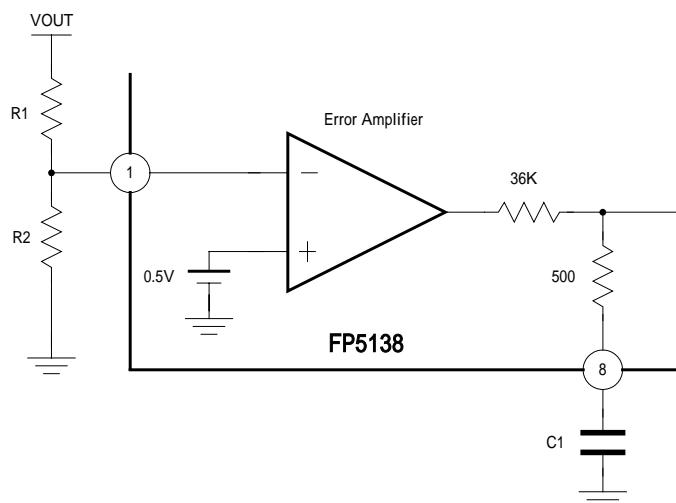

**Figure 12. Error Amplifier with Feedback resistance divider**

### Oscillator

The oscillator frequency can be set between 20KHz and 500KHz by connecting a resistor and a capacitor at OSC pin of **FP5138** to ground. The oscillator frequency can be determined by using the graph shown in Figure 9.

The oscillator output is a sawtooth wave with a minimum value of approximately 0.1V and a maximum value of approximately 0.8V. The PWM comparator compares the oscillator voltage with error amplifier output voltage; internal DTC voltage (typ. 0.6V) and soft start setting voltage. When the sawtooth wave voltage is low than above three-output voltage, the output of **FP5138** is high (Turn on NPN transistor or NMOS).

**Under voltage lockout (UVLO)**

The under voltage lockout circuits turn the output off and whenever the supply voltage drops too low (approximately 0.9V at 25°C) for proper operation. A hysteresis voltage of 200mV eliminates false triggering on noise and chattering.

**Soft Start/ Short-circuit protection (S.S. / S.C.P.)**

The soft start is functional after power on, and the interval of soft start time is determined by a capacitor connected to SCP pin (pin 2). When soft start function finished, the internal soft start voltage is setting high, but external SCP pin is setting low in order to change to short circuit detection / protection function.

The time of soft start is following expression:

$$T_{ss} = 0.35 * C [\mu F]$$


The short circuit protection is functional due to a heavy loading drop and output of error amplifier (COMP pin) is maintain a  $V_{POS}$  (typ. 0.9V), the capacitor is charged until SCP threshold voltage (typ. 0.8V), then **FP5138** output is disable (internal pull-low) and the capacitor is discharged to low.

The time of short circuit protection is following expression:

$$T_{scp} = 0.8 * C [\mu F]$$

### Output transistor



The **FP5138** has a totem-pole transistor with a 40mA source/sink current rating to drive an external NPN transistor or NMOS directly. The driving current capability depends on a resistor R that is connected to BR/CTL pin (Pin4) of **FP5138**. (see fig. 14)


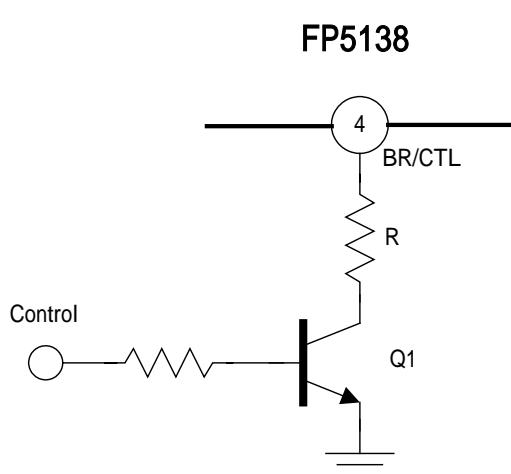



**Figure 13. Output transistor driving control circuit**


BR/CTL pin can also use to control the output of **FP5138** for disable or enable function of system.

Control Pin	Q1	BR/CTL Pin	Output Transistor Function	Mode
Low	Off	Open	Disable	Stand-by
High	On	Bias Current	Enable	Operation

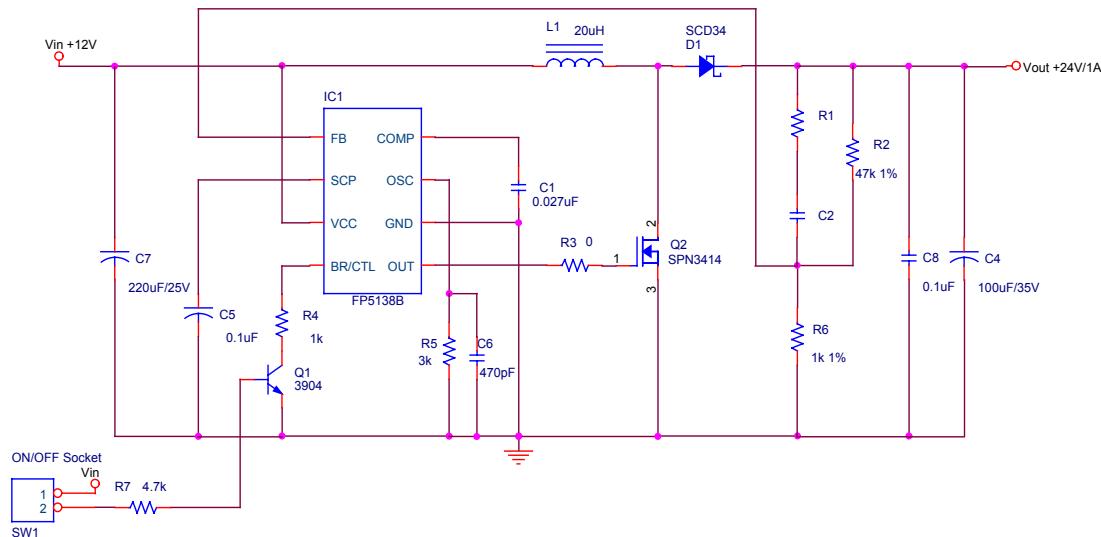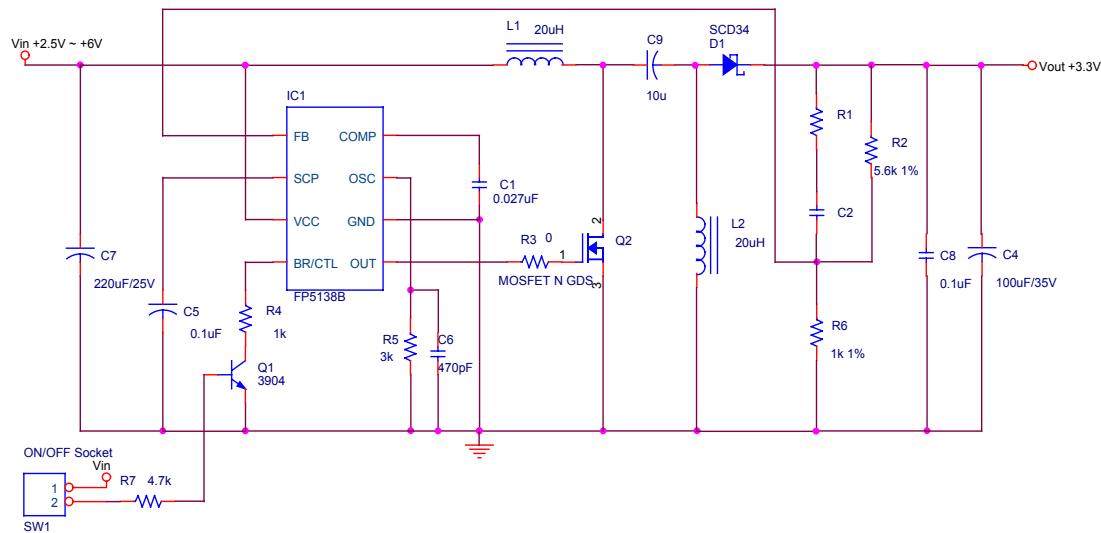**APPLICATION NOTE (1)**

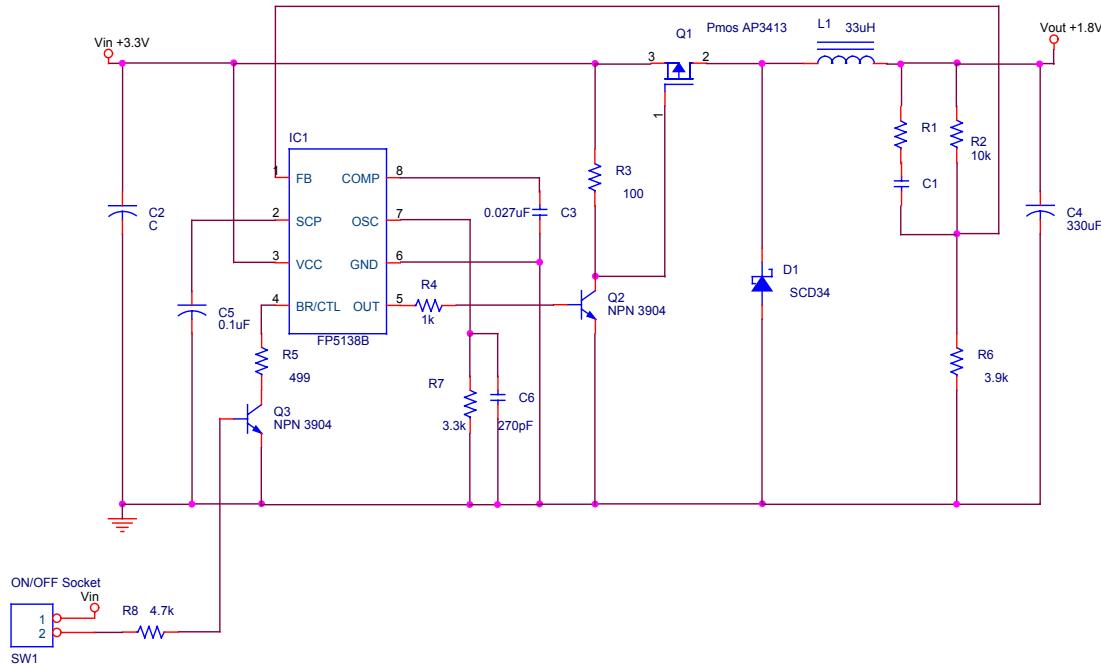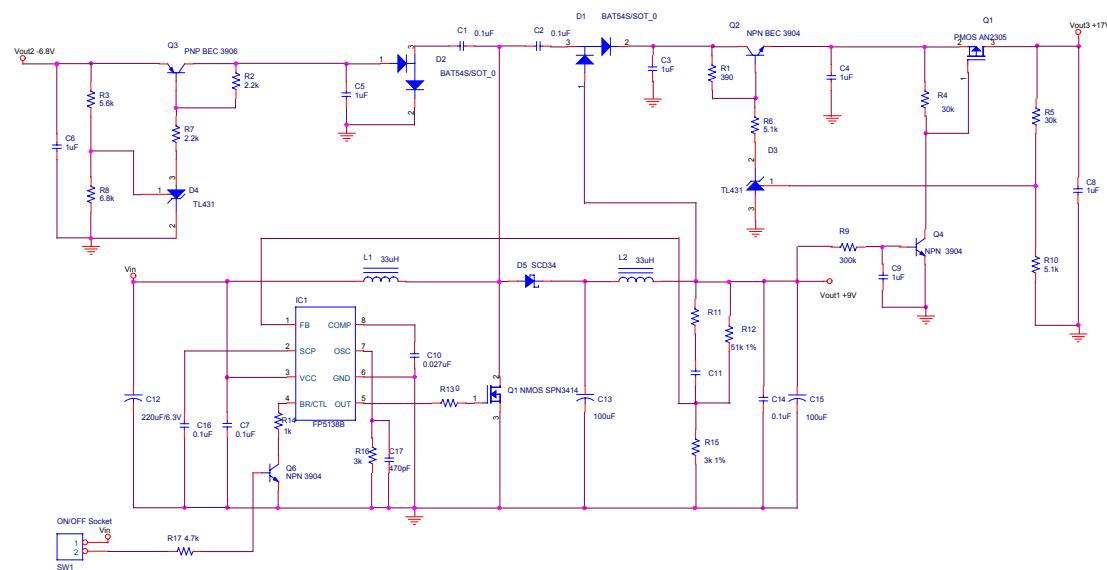**Figure 14. DC12V to DC24V Boost Regulator**

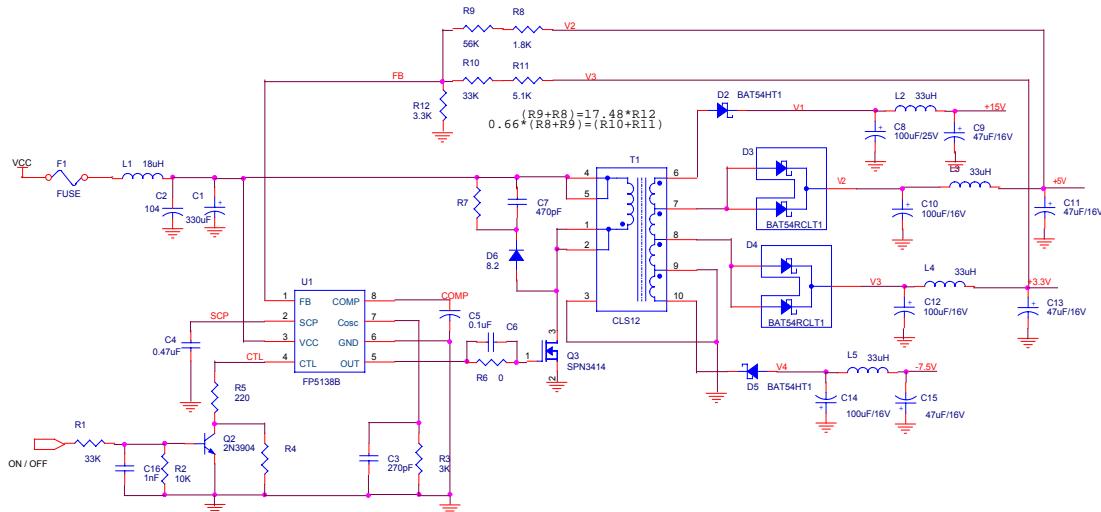**Figure 15. DC2.5V~DC6V to DC3.3V SEPIC Regulator**

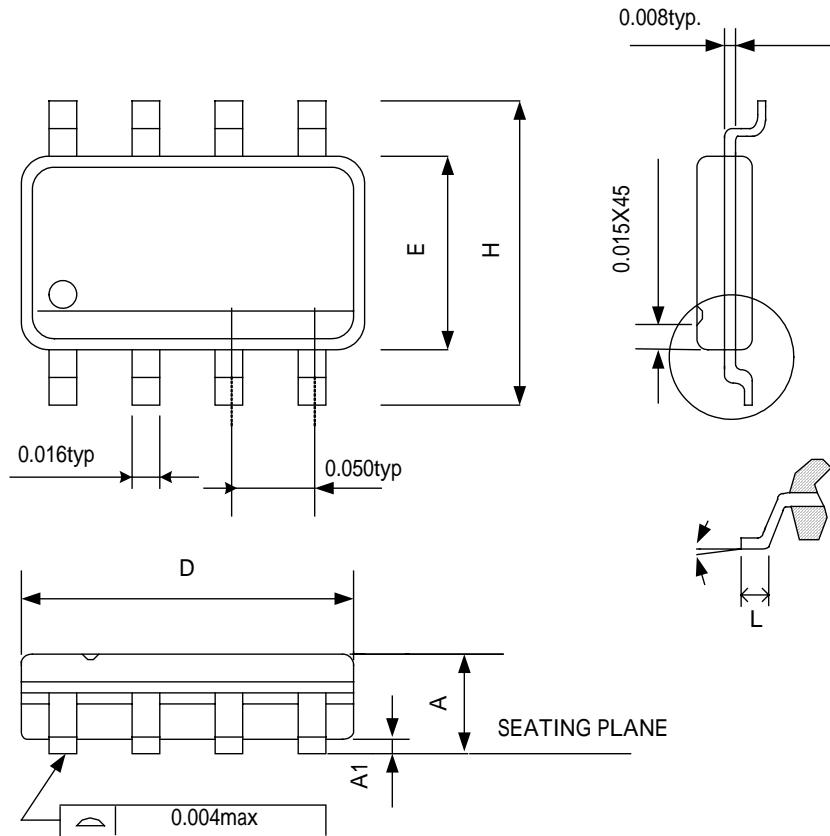**APPLICATION NOTE (2)**

**Figure 16. DC3.3V to DC1.8V Buck Regulator**

**Figure 17. Charge Pump DC-DC Converter Circuits**

**APPLICATION NOTE (3)**

**Figure 18. Flyback Multi-output DC-DC Converter Circuits**


**PACKAGE OUTLINE  
SOP8**


SYMBOLS	MIN	MAX
A	1.346	1.752
A1	0.101	0.254
D	4.800	4.978
E	3.810	3.987
H	5.791	6.197
L	0.406	1.270
°	0	8

UNIT:MM

**NOTE:**

1. JEDEC OUTLINE:MS-012 AA
2. DIMENSIONS "D" DOES NOT INCLUDE MOLD FLASH,PROTRUSIONS OR GATE BURRS.MOLD FLASH,PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED .15mm (.006in) PER SIDE
3. DIMENSIONS "E" DOES NOT INCLUDE INTER-LEAD FLASH,OR PROTRUSIONS. INTER-LEAD FLASH AND PROTRUSIONS SHALL NOT EXCEED .25mm (.010in) PER SIDE.

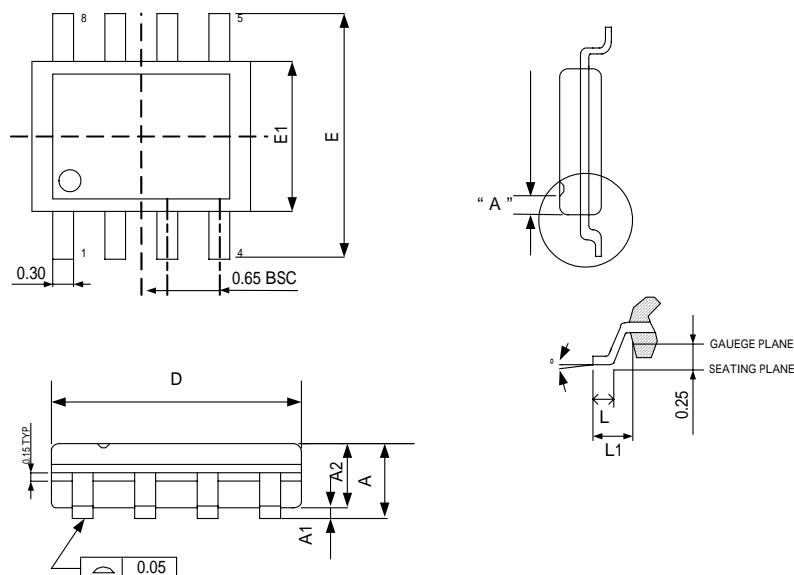
**MSOP8**


SYMBOLS	MIN	MAX
A	-	1.10
A1	0.00	0.15
A2	0.75	0.95
D	3.00 BSC	
E	4.90 BSC	
E1	3.00 BSC	
L	0.40	0.80
L1	0.95 REF	
°	0	8

UNIT:MM

**NOTE:**

- 1.JEDEC OUTLINE:MO-187 AA
- 2.DIMENSIONS "D" DOES NOT INCLUDE MOLD FLASH,PROTRUSIONS OR GATE BURRS.MOLD FLASH,PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE
- 3.DIMENSIONS "E1" DOES NOT INCLUDE INTERLEAD FLASH,OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.25 PER SIDE.
- 4.DIMENSIONS "0.22" DOES NOT INCLUDE DAMBAR PROTRUSIONS.ALLOWABLE DAMBAR PROTRUSIONS SHALL BE 0.08 MM TOTAL IN EXCESS OF THE '0.22' DIMENSION AT MAXIMUM MATERIAL CONDITION.DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.MINIMUM SPAC BETWEEN PROTRUSION AND ADJACENT LEAD IS 0.07MM.
- 5.DIMENSIONS "D" AND 'E1' TO BE DETERMINED AT DATUM PLANE H

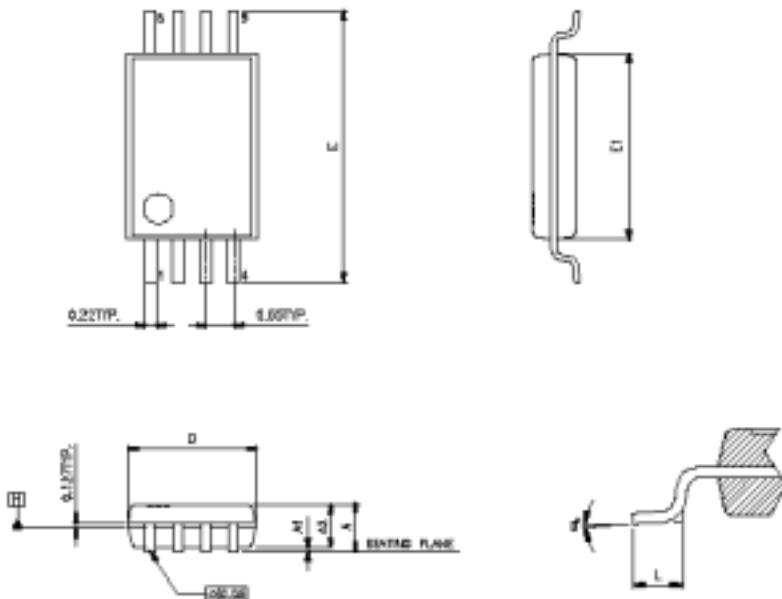
**TSSOP8**


SYMBOLS	MIN	NOR	MAX
A	-	-	1.20
A1	0.05	-	0.15
A2	0.96	1.01	1.06
D	2.90	3.00	3.10
E	6.40 BSC		
E1	4.30	4.40	4.50
L	0.45	0.60	0.75
°	0	-	8

UNIT:MM

**NOTE:**

- 1.JEDEC OUTLINE:MO-187 AA
- 2.DIMENSIONS "D" DOES NOT INCLUDE MOLD FLASH,PROTRUSIONS OR GATE BURRS.MOLD FLASH,PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE
- 3.DIMENSIONS "E1" DOES NOT INCLUDE INTERLEAD FLASH,OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.25 PER SIDE.
- 4.DIMENSIONS "0.22" DOES NOT INCLUDE DAMBAR PROTRUSIONS.ALLOWABLE DAMBAR PROTRUSIONS SHALL BE 0.08 MM TOTAL IN EXCESS OF THE '0.22' DIMENSION AT MAXIMUM MATERIAL CONDITION.DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.MINIMIM SPAC BETWEEN PROTRUSION AND ADJACENT LEAD IS 0.07MM.
- 5.DIMENSIONS "D" AND 'E1' TO BE DETERMINED AT DATUM PLANE H

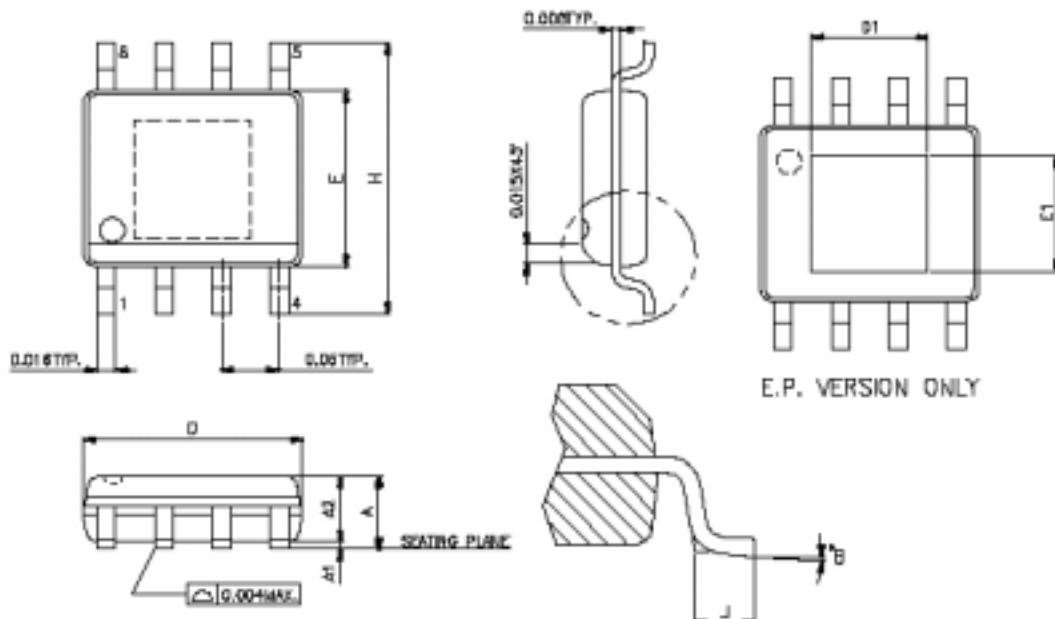**SOP8-EXPOSED PAD**


SYMBOLS	MIN	MAX
A	1.346	1.752
A1	0.101	0.254
D	4.800	4.978
E	3.810	3.987
H	5.791	6.197
L	0.406	1.270
°	0	8

UNIT:MM

**THERMALLY ENHANCED DIMENSISONS**

PAD SIZE	E1	D1
<b>A</b>	<b>2.057 REF</b>	<b>2.057 REF</b>
<b>A1</b>	<b>2.184 REF</b>	<b>2.971 REF</b>

UNIT:MM


**NOTE:**

- 1.JEDEC OUTLINE:N/A
- 2.DIMENSIONS "D" DOES NOT INCLUDE MOLD FLASH,PROTRUSIONS OR GATE BURRS.MOLD FLASH,PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED .15mm (.06in) PER SIDE
- 3.DIMENSIONS "E" DOES NOT INCLUDE INTER-LEAD FLASH,OR PROTRUSIONS. INTER-LEAD FLASH AND PROTRUSIONS SHALL NOT EXCEED .25mm (.010in) PER SIDE.


## PACKING SPECIFICATIONS

### BOX DIMENSION

TUBE INSIDE BOX AND CARTON

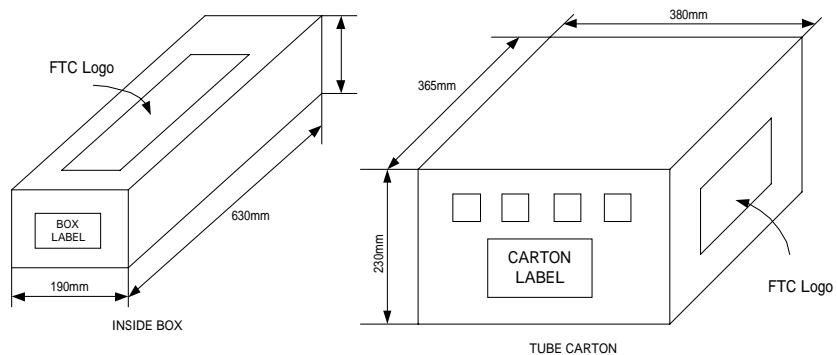

TAPE AND REEL INSIDE BOX AND CARTON

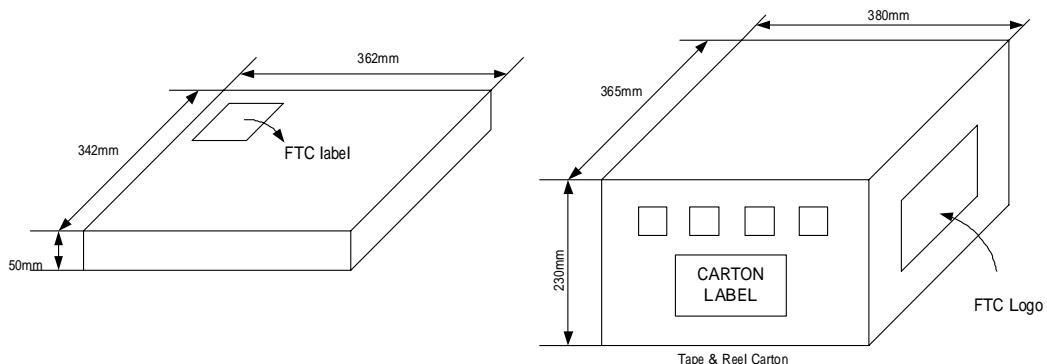


### PACKING QUANTITY SPECIFICATIONS

SOP 8	MSOP8	TSSOP8	SOP8-EXPOSED PAD	SOP 8	MSOP8	TSSOP8	SOP8-EXPOSED PAD
100 EA/TUBE	80 EA/TUBE	160 EA/TUBE	100 EA/TUBE	2500 EA / REEL			
100 TUBES / INSIDE BOX				4 INSIDE BOXES / CARTON			
4 INSIDE BOXES / CARTON							

### LABEL SPECIFICATIONS

Tapping & Reel

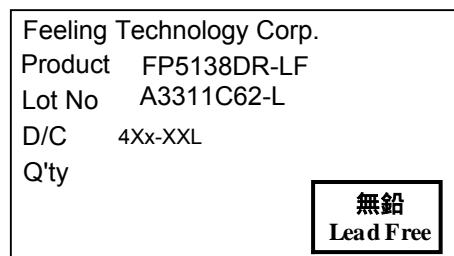


**CARTON**


Feeling Technology Corp.	
Product Type: FP5138DR-LF	
Lot No: A3311C62-L	
Date Code: 4Xx-XXL	
Package Type: SOP-8L	
Marking Type: Laser	
Total Q'ty: 10,000	
無鉛 Lead Free	

**SOP8**
**CARRIER TAPE DIMENSIONS**

APPLICATION	W	P	E	F	D	D <sub>1</sub>
SOP8	12.0 <sup>+0.3</sup> <sub>-0.1</sub>	8.0±0.1	1.75±0.1	5.5±0.1	1.55±0.1	1.5 <sup>+0.25</sup>

APPLICATION	P <sub>0</sub>	P <sub>1</sub>	A <sub>D</sub>	B <sub>0</sub>	K <sub>0</sub>	t
SOP8	4.0±0.1	2.0±0.1	6.4±0.1	5.20±0.1	2.1±0.10	0.30±0.013

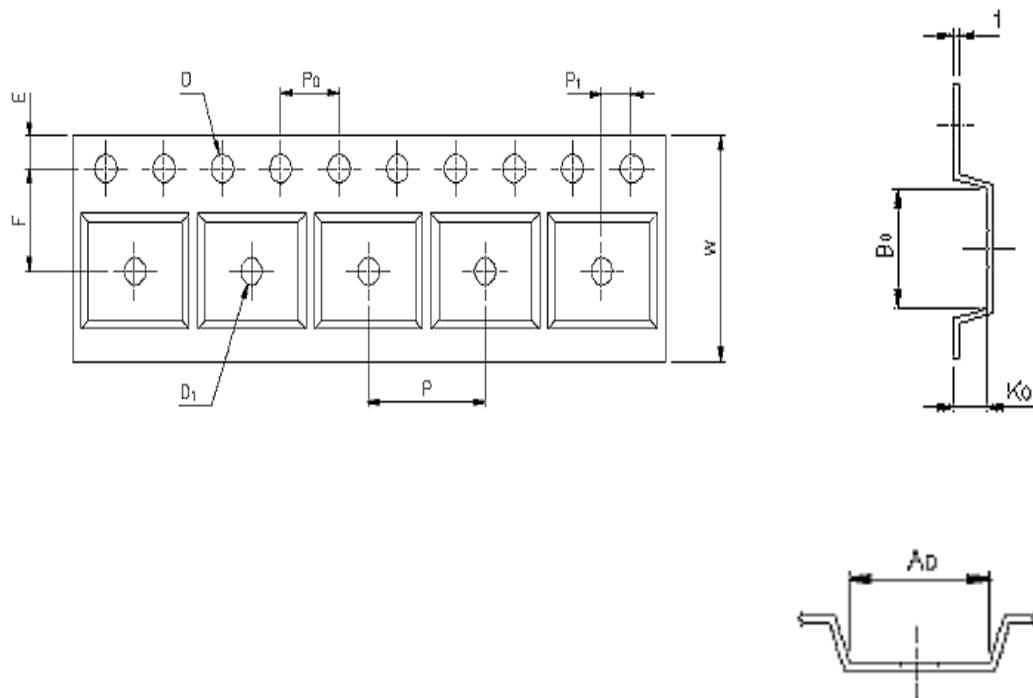


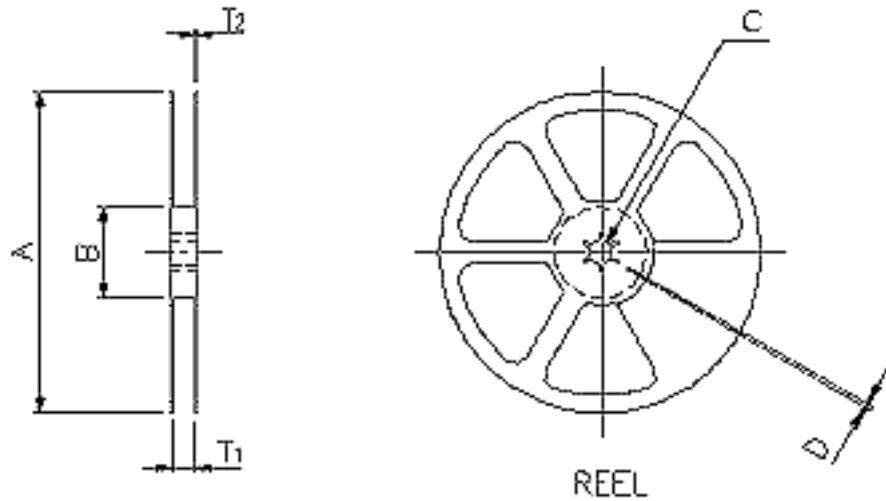
**REEL DIMENSIOS**


APPLICATION	MATERIAL	A	B	C	D	T <sub>1</sub>	T <sub>2</sub>
SOP8	PLASTIC REEL (WHITE)	330±0.1	62±1.5	12.75+0.15	2+0.6	12.4+0.2	2.0+0.2


**MSOP8**
**CARRIER TAPE DIMENSIONS**

APPLICATION	W	P	E	F	D	D <sub>1</sub>
MSOP8	12.0±3	8.0	1.75±1.0	5.5±0.5	1.5 <sup>+0.1</sup>	1.50

APPLICATION	P <sub>0</sub>	P <sub>1</sub>	A <sub>D</sub>	B <sub>0</sub>	K <sub>0</sub>	t
MSOP8	4.0±0.1	2.0±0.5	4.20	3.30	1.20	0.30±0.5

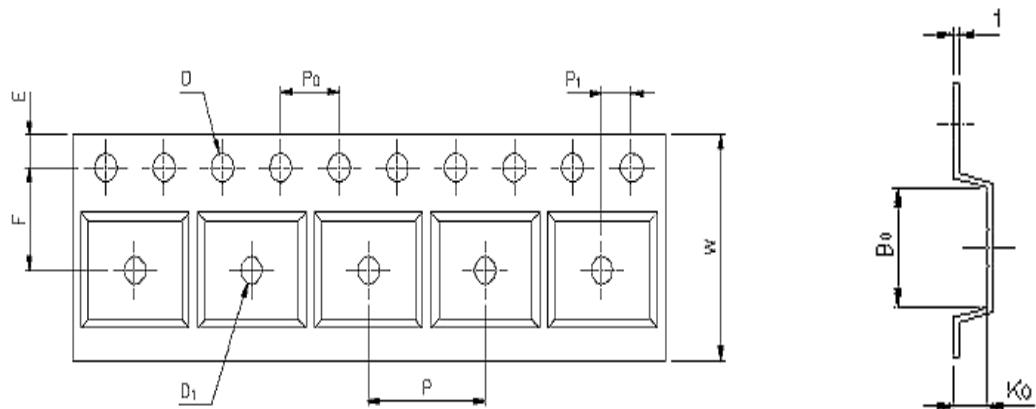

(mm)


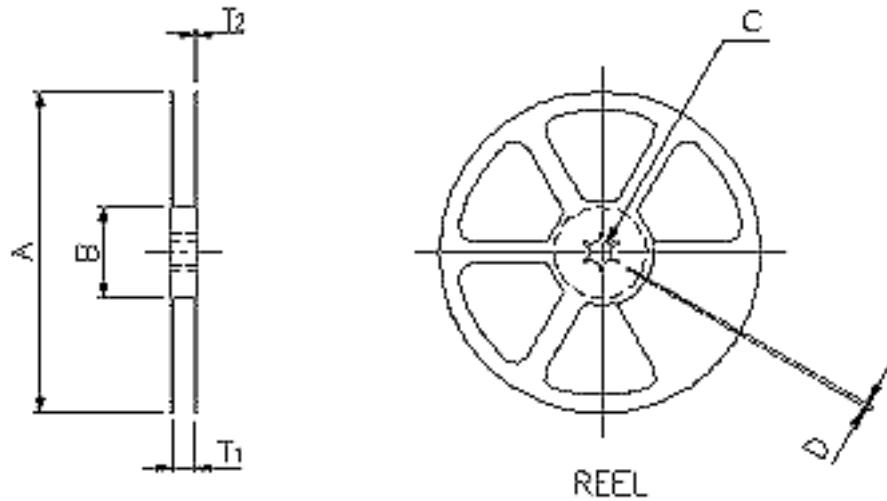
**REEL DIMENSIONS**


APPLICATION	MATERIAL	A	B	C	D	T <sub>1</sub>	T <sub>2</sub>
MSOP8	PLASTIC REEL (WHITE)	330±1	62±1.5	12.75 <sup>+0.15</sup>	2±0.15	12.4 <sup>+0.2</sup>	16.8 <sup>-0.4</sup>


**TSSOP8**
**CARRIER TAPE DIMENSIONS**

APPLICATION	W	P	E	F	D	D <sub>1</sub>
TSSOP8	12.0±0.3	8.00	1.75±1.0	5.5±0.05	1.5 <sup>+0.1</sup>	1.50

APPLICATION	P <sub>0</sub>	P <sub>1</sub>	A <sub>D</sub>	B <sub>0</sub>	K <sub>0</sub>	t
TSSOP8	4.00	2.00±0.05	4.20	3.40	1.30	0.30±0.5

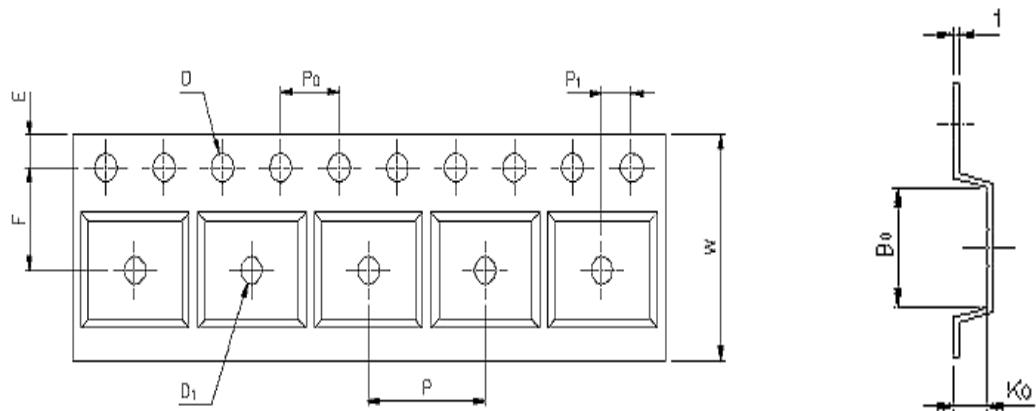

(mm)


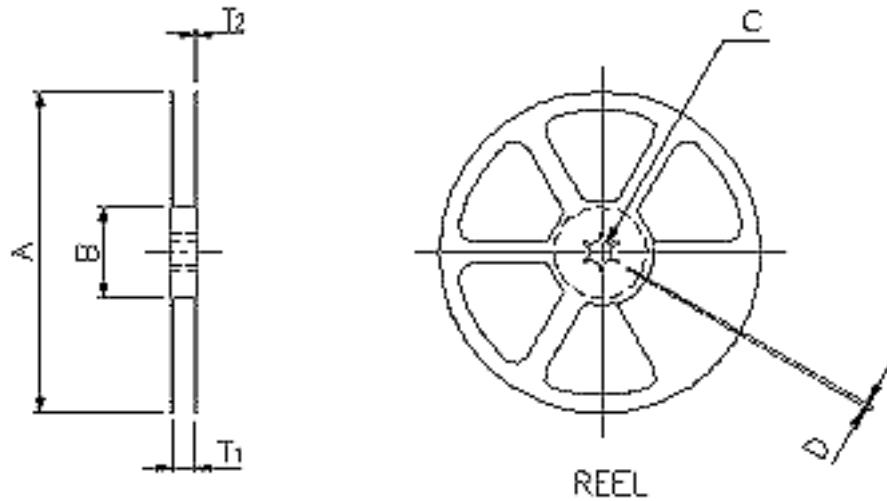
**REEL DIMENSIOS**


APPLICATION	MATERIAL	A	B	C	D	T <sub>1</sub>
TSSOP8	PLASTIC REEL (WHITE)	330	100	13.0 <sup>+0.5</sup>	2±0.5	12.5

**SOP8-EXPOSED PAD  
CARRIER TAPE DIMENSIONS**

APPLICATION	W	P	E	F	D	D <sub>1</sub>
SOP8	12.0 $^{+0.3}_{-0.1}$	8.0 $\pm$ 0.1	1.75 $\pm$ 0.1	5.5 $\pm$ 0.1	1.55 $\pm$ 0.1	1.5 $^{+0.25}$

APPLICATION	P <sub>0</sub>	P <sub>1</sub>	A <sub>D</sub>	B <sub>0</sub>	K <sub>0</sub>	t
SOP8	4.0 $\pm$ 0.1	2.0 $\pm$ 0.1	6.4 $\pm$ 0.1	5.20 $\pm$ 0.1	2.1 $\pm$ 0.10	0.30 $\pm$ 0.013

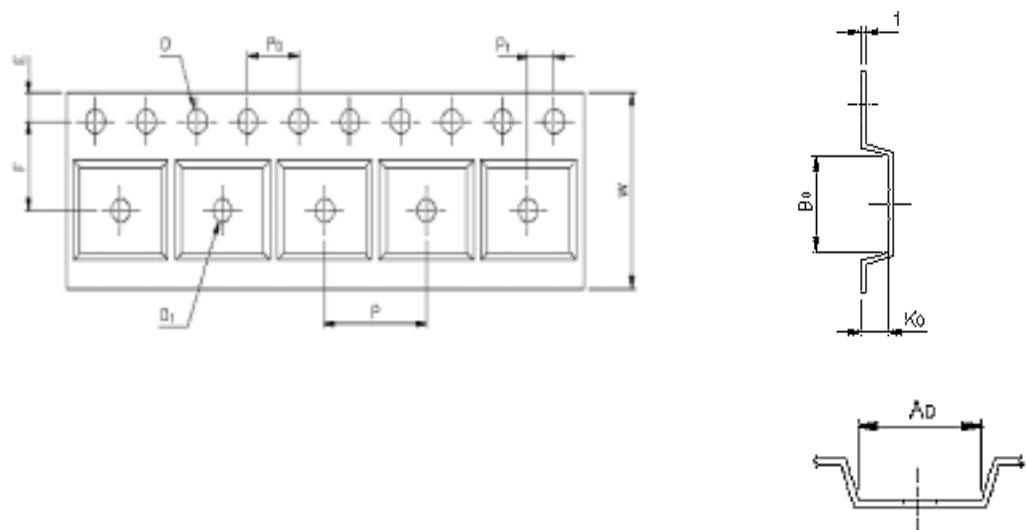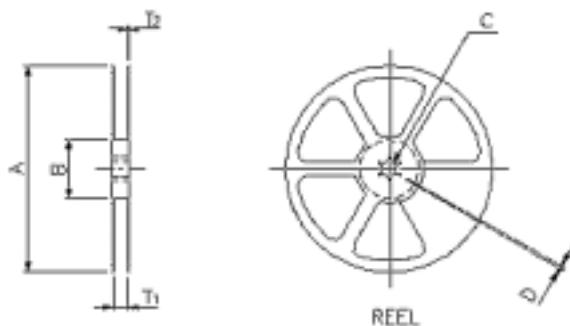
**REEL DIMENISONS**


APPLICATION	MATERIAL	A	B	C	D	T <sub>1</sub>	T <sub>2</sub>
SOP8	PLASTIC REEL (WHITE)	330 $\pm$ 0.1	62 $\pm$ 1.5	12.75 $\pm$ 0.15	2 $\pm$ 0.6	12.4 $\pm$ 0.2	2.0 $\pm$ 0.2