



KCR-Mp3charger

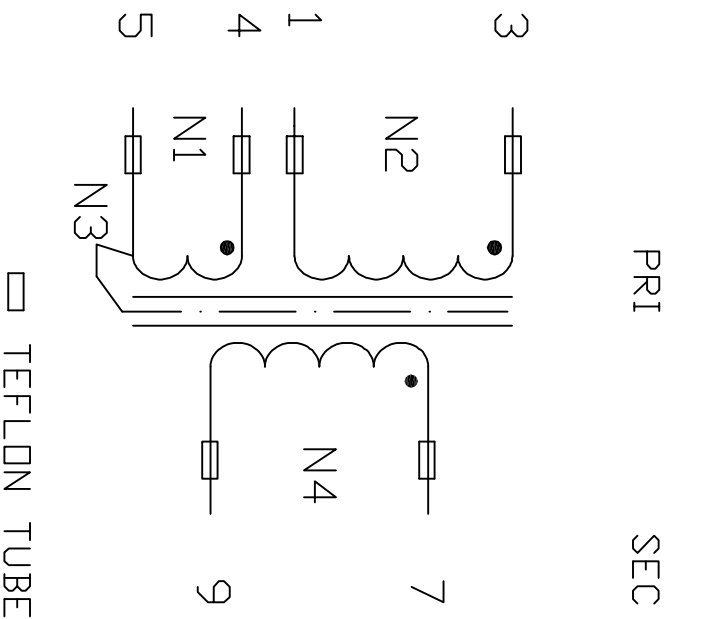

Hi-pot:

- P-S 3750VAC 0.5mA 60S
- P-C 2000VAC 0.5mA 60S
- S-C 2000VAC 0.5mA 60S

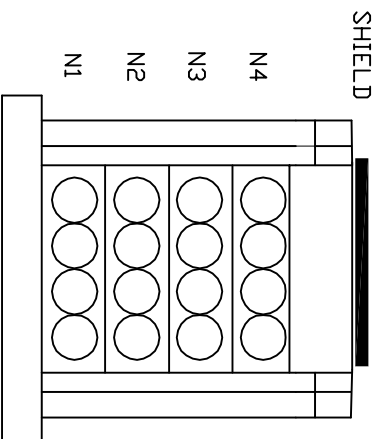

6.7.8.9.10.2脚剪掉.7.9直接使用三重绝缘线引出。引出线长为5MM剥镀3MM。

漏感要小于60UH。成品以后变压器要包3层胶带。

NOTE: CORE: EE13 PC40

Lp=3.6mH

N2:∅0.14*1*180Ts

N1:∅0.18*1*36Ts

N4:∅0.45*15Ts

N3 0.05*4mm*28mm 铜箔引线直径0.18.引线接5脚。

TEFLON TUBE