



## Adjustable Precision Shunt Regulator

### General Description

The CYT432 is a low voltage three terminal adjustable shunt regulator with a guaranteed thermal stability over applicable temperature ranges. The output voltage can be set to any value between  $V_{REF}$  (approximately 1.24 V) to 8V with two external resistors. This device has a typical output impedance of  $0.30\Omega$ . Active output circuitry provides a very sharp turn on characteristic, making this device excellent replacement for Zener diodes in many applications.

The CYT432 is characterized for operation from  $-40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$ , and two package options (SOT-23 and TO-92) allow the designer the opportunity to select the proper package for their applications.


### Features

- Low voltage operation (1.24V)
- Adjustable output voltage  $V_0 = V_{REF}$  to 8V
- Wide operating current range  $60\mu\text{A}$  to  $100\text{mA}$
- Low dynamic output impedance  $0.30\Omega$  (Typ.)
- Trimmed bandgap design up to  $\pm 0.5\%$ .
- ESD rating is 2.5KV(Per MIL-STD-883D)
- 100% Lead (Pb)-Free.

### Application

- Linear Regulators
- Adjustable Supplies
- Switching Power Supplies
- Battery Operated Computers
- Instrumentation
- Computer Disk Drives

### Pin Configuration

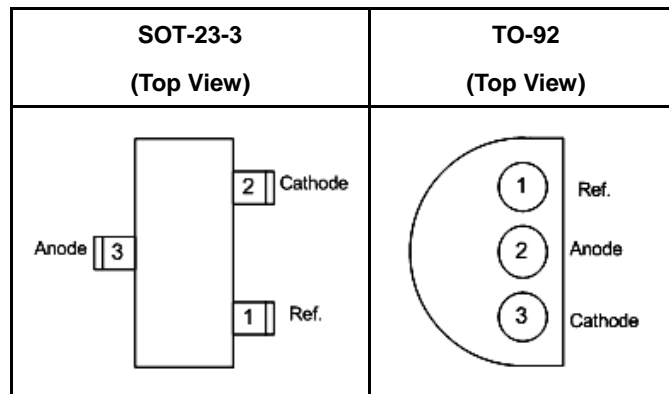

### Marking Information

Package	Marking	Production Batch Number	Lead-Free Package
SOT-23-3	CYT432x	The last character is the batch number.	Lead-free package is indicated by a dot on top of the last character.
TO-92	CYT432 XXXX	XXXX is the batch number.	Lead-free package is indicated by LF after XXXX.



## Absolute Maximum Rating

Parameter	Symbol	Maximum	Units
Cathode Voltage	$V_{KA}$	8	V
Continuous Cathode Current	$I_{KA}$	150	mA
Reference Current	$I_{REF}$	3	mA
Operating Junction Temperature Range	$T_J$	150	°C
Storage Temperature Range	$T_{STG}$	-45 to 150	°C
Thermal Resistance	$\theta_{JA}$	230 (SOT-23-3)	°C/W
		220 (TO-92)	
Lead Temperature (Soldering) 10 seconds	$T_{LEAD}$	260	°C

## Electrical Characteristics


Parameter	Symbol	Test Conditions & Circuit	Min	Typ	Max	Unit
Reference Voltage	$V_{REF}$	Test circuit #1 $V_{KA} = V_{REF}, I_{KA} = 10mA$	1234	1240	1246	mV
			1228	1240	1252	
			1221	1240	1259	
			1215	1240	1265	
			1237	1250	1263	
Deviation of Reference Voltage over Full Temperature Range	$V_{I(DEV)}$	Test circuit #1 $V_{KA} = V_{REF}, I_{KA} = 10mA,$ $T_A = -40^{\circ}C - 105^{\circ}C$	--	10		mV
Ratio of Change in Reference Voltage to the Change in Cathode Voltage	$\Delta V_{REF}/\Delta V_{KA}$	Test circuit #2 $I_{KA} = 10mA, \Delta V_{KA} = 8V \text{ to } V_{REF}$	--	-1.0	-2.7	mV/V
Reference Current	$I_{REF}$	Test circuit #2 $I_{KA} = 10mA, R1=10k\Omega, R2 = \infty$	--	0.15	2	$\mu A$
Deviation of Reference Current over Full Temperature Range	$I_{I(DEV)}$	Test circuit #2 $I_{KA} = 10mA, R1=10k\Omega, R2 = \infty$ $T_A = 0^{\circ}C - 105^{\circ}C$	--	0.10		$\mu A$
Minimum Cathode Current for Regulation	$I_{MIN}$	Test circuit #1 $V_{KA} = V_{REF}$	--	60	100	$\mu A$
Off-state Cathode Current	$I_{OFF}$	Test circuit #3 $V_{KA} = 8V, V_{REF} = 0$	--	0.04	0.8	$\mu A$
Dynamic Impedance	$ Z_{KA} $	Test circuit #1 $I_{KA} = 100\mu A - 80mA,$ $V_{KA} = V_{REF}, f \leq 1kHz$	--	0.30	1	$\Omega$

Note 1: Upon Customer Request.




## Typical Performance Characteristics


Cathode Current VS Cathode Voltage

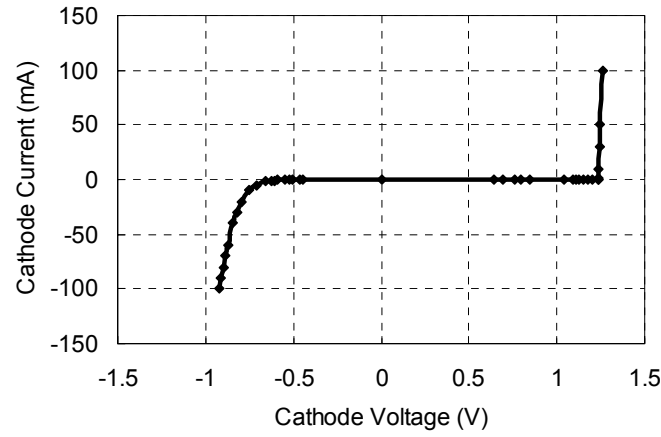



Reference Voltage VS Temperature  
(Iload=10mA)

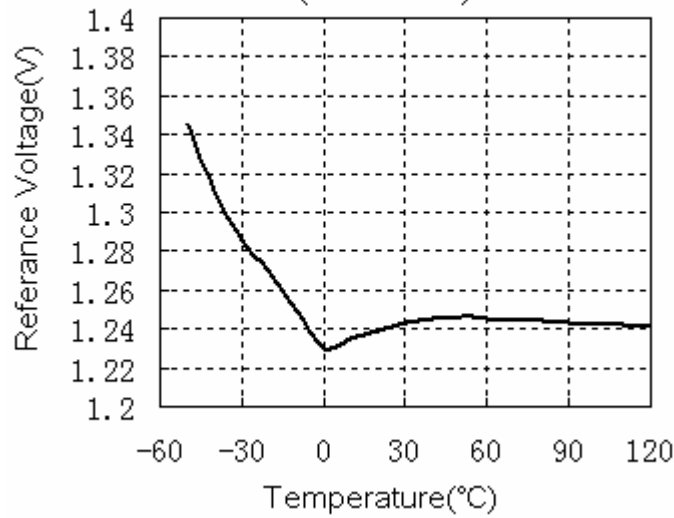


Reference Input Current VS Temperature  
( R1=10k,R2=∞,Iload=10mA )

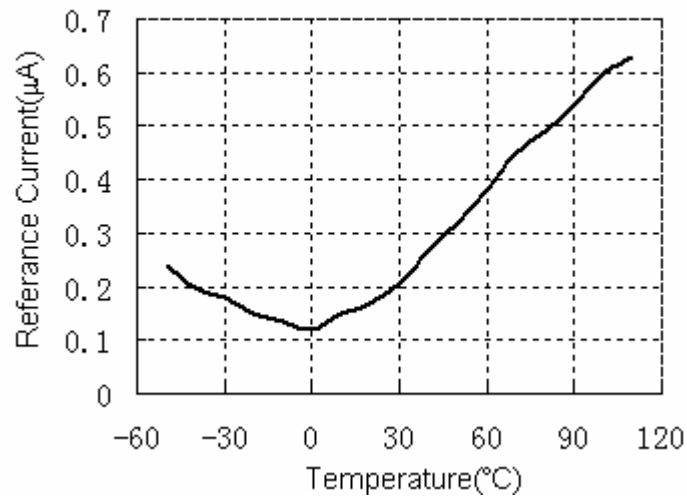

## Stability Boundary Condition

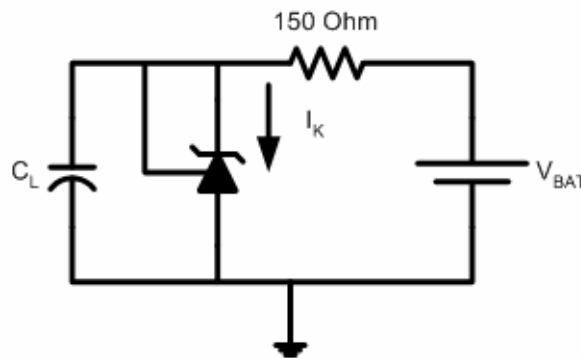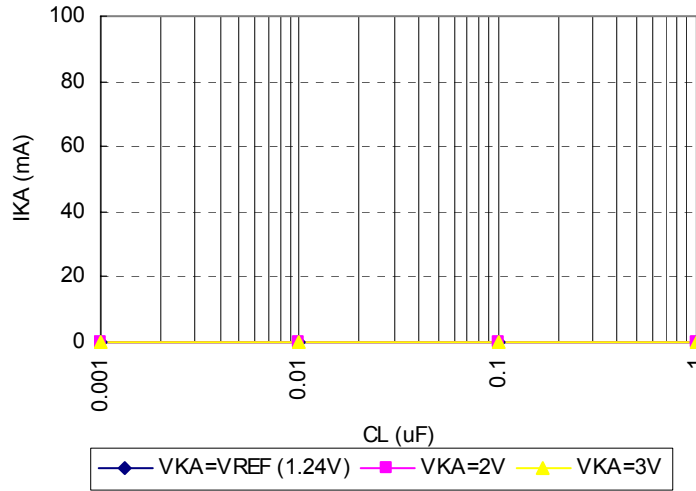

Test Circuit for  $V_{KA} = V_{REF}$

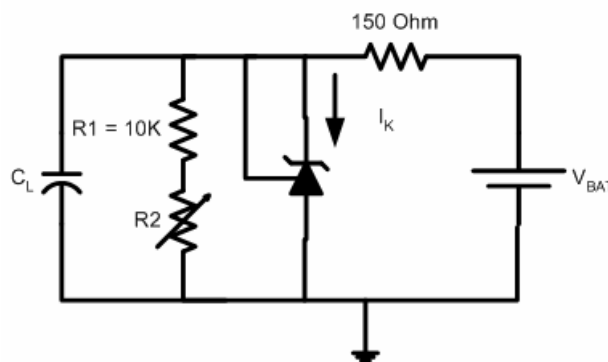


Test Circuit for  $V_{KA} = 2V, 3V$

The areas under the curves represent conditions that may cause the device to oscillate. For  $V_{KA} = 2V$  and  $3V$  curves,  $R2$  and  $V_{BAT}$  were adjusted to establish the initial  $V_{KA}$  and  $I_K$  conditions with  $C_L = 0$ .  $V_{BAT}$  and  $C_L$  then were adjusted to determine the ranges of stability. As the graph suggested, CYT432 is unconditional stable with  $I_K$  from 0 to 100mA and with  $C_L$  from 0.001uF to 1uF.




# CYT432

## Symbol Diagram




## Block Diagram

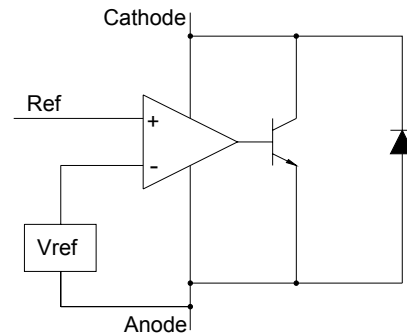

## Test Circuits

<p><b>Test Circuit 1:</b> <math>V_{KA} = V_{REF}</math></p>	<p><b>Test Circuit 2:</b> <math>V_{KA} &gt; V_{REF}</math></p>	<p><b>Test Circuit 3:</b> <b>Off State Current</b></p>


## Application Circuit

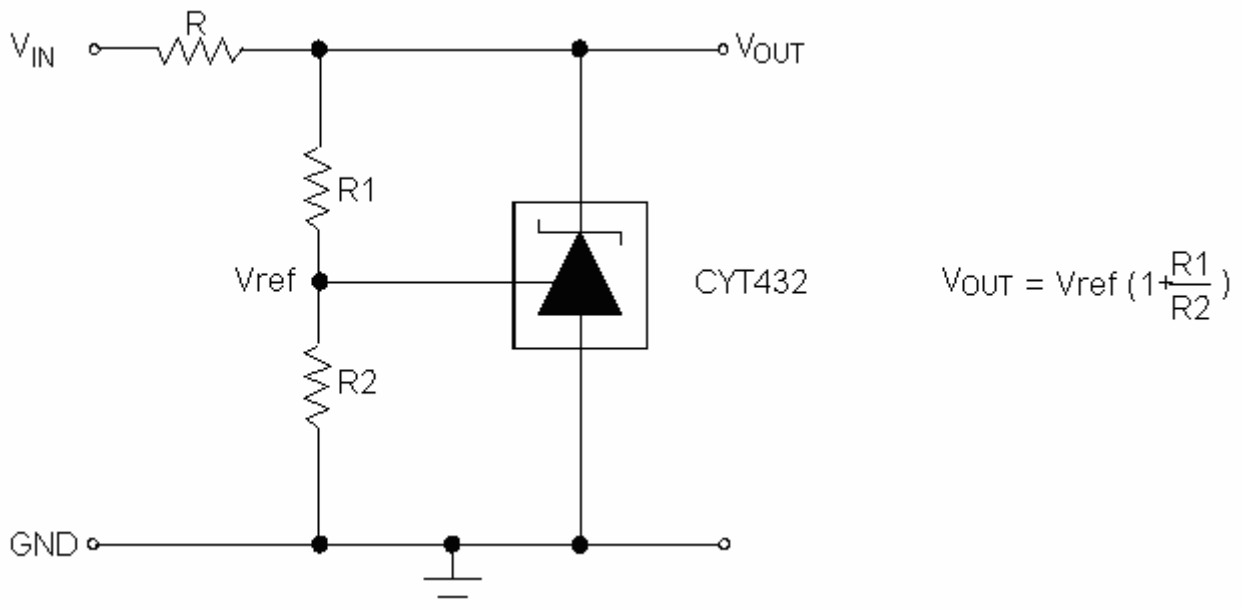




# CYT432

## OUTLINE DRAWING SOT-23-3

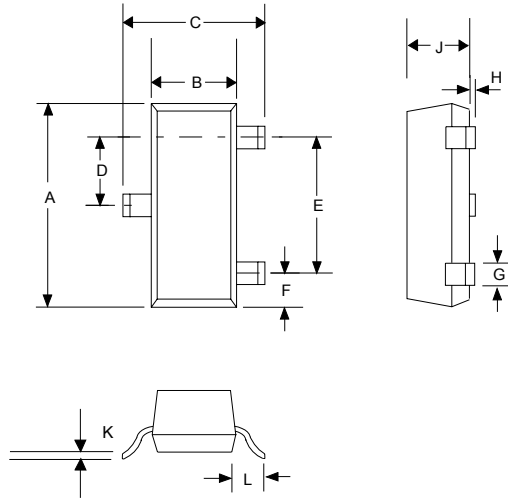


DIMENSIONS				
DIM <sup>N</sup>	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.110	0.120	2.80	3.04
B	0.047	0.055	1.20	1.40
C	0.083	0.104	2.10	2.64
D	0.035	0.040	0.89	1.03
E	0.070	0.080	1.78	2.05
F	0.018	0.024	0.45	0.60
G	0.015	0.020	0.37	0.51
H	0.0005	0.004	0.013	0.10
J	0.034	0.040	0.887	1.02
K	0.003	0.007	0.085	0.18
L	-	0.027	-	0.69

## OUTLINE DRAWING SC59-3L

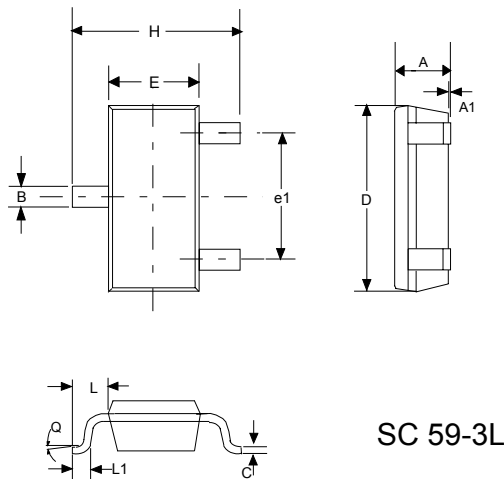

DIMENSIONS				
DIM <sup>N</sup>	INCHE		MM	
	MIN	MAX	MIN	MAX
A	0.035	0.043	0.90	1.10
A1	0.0004	0.005	0.01	0.13
B	0.012	0.020	0.30	0.50
C	0.004	0.008	0.09	0.20
D	0.110	0.122	2.80	3.10
H	0.098	0.122	2.50	3.10
E	0.059	0.067	1.50	1.70
e	0.037REF		0.95REF	
e1	0.075REF		1.90REF	
L1	0.008	0.022	0.20	0.55
L	0.014	0.031	0.35	0.80
Q	0	10	0	10

## OUTLINE DRAWING TO-92

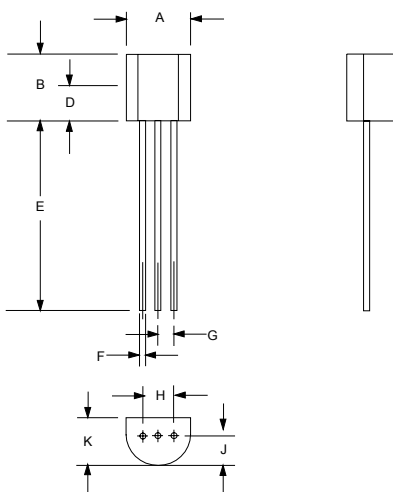

DIMENSIONS				
DIM <sup>N</sup>	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.445	5.207
B	0.170	0.210	4.318	5.334
E	0.500	0.610	12.70	15.50
F	0.016	0.021	0.407	0.533
G	0.045	0.055	1.143	1.397
H	0.095	0.105	2.413	2.667
J	0.080	0.105	2.032	2.667
K	0.125	0.165	3.175	4.191