


RF-54:

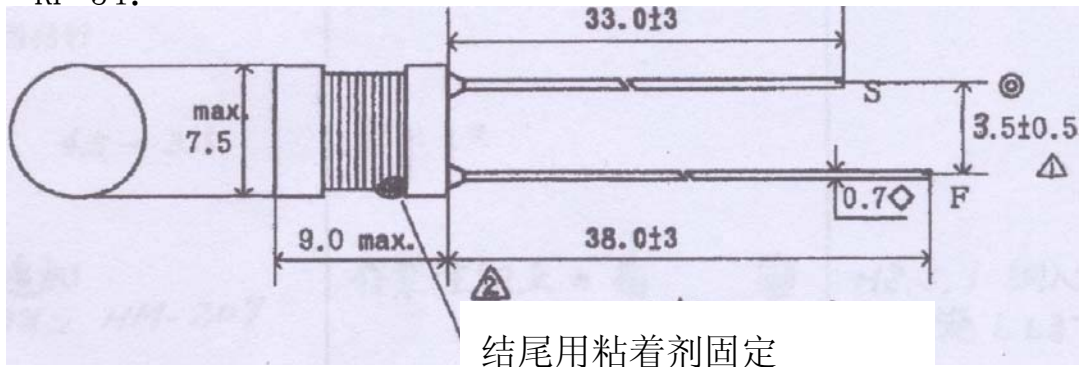


线径: 2UEW- $\Phi$ 0.3      54.5T

电感:  $94\mu\text{H} \pm 13\%$       1KHZ, 1V


直流阻抗:  $0.2\ \Omega \pm 13\%$

RF-60:

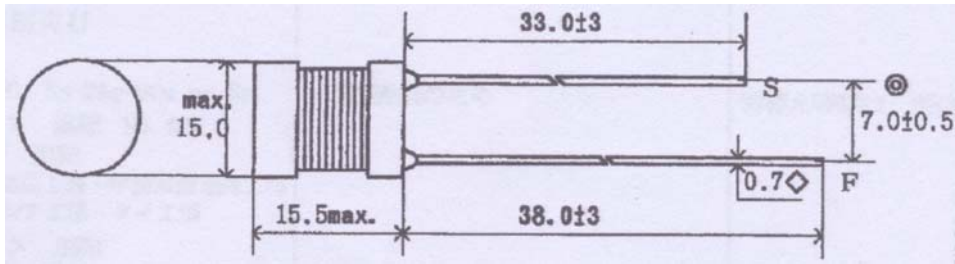


|                                       |
|---------------------------------------|
| 线径: 2UEW- $\Phi 0.8$ 29.5T            |
| 电感: $45\mu\text{H} \pm 13\%$ 1KHZ, 1V |
| 直流阻抗: $0.027 \Omega \pm 13\%$         |

RF-52:

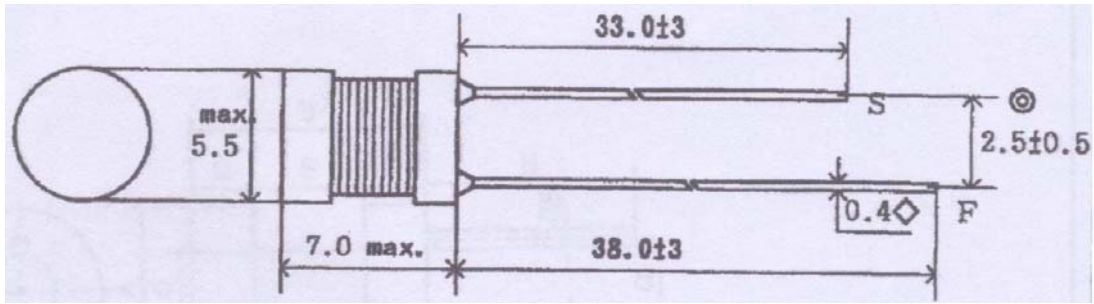

|                    |          |
|--------------------|----------|
| 线径: 2UEW-Φ0.2      | 45.5T    |
| 电感: 55uH ± 13%     | 1KHZ, 1V |
| 直流阻抗: 0.25 Ω ± 13% |          |

RF-56:

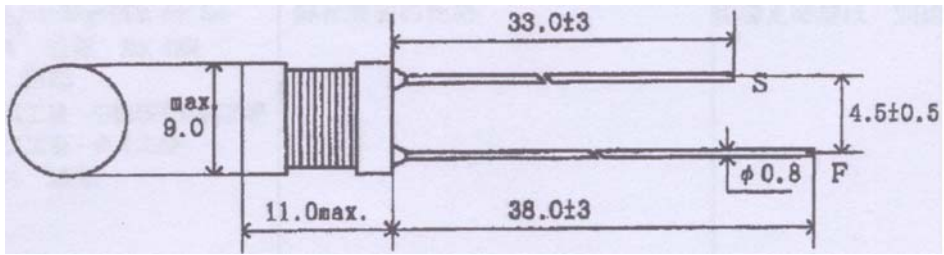

|                            |
|----------------------------|
| 线径: 2UEW- $\Phi 0.4$ 20.5T |
|----------------------------|

|   |
|---|
| 电感: $17.5\mu\text{H} \pm 13\%$ 1KHZ, 1V |
|---|

|                                   |
|-----------------------------------|
| 直流阻抗: $40\text{m}\Omega \pm 13\%$ |
|-----------------------------------|