Household and similar electrical appliances — Safety —

Part 2-2: Particular requirements for vacuum cleaners and water-suction cleaning appliances

The European Standard EN 60335-2-2:2003 has the status of a British Standard

ICS 13.120; 97.080



NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

National foreword

This British Standard is the official English language version of EN 60335-2-2:2003. It was derived by CENELEC from IEC 60335-2-2:2002. It supersedes BS EN 60335-2-2:1996 which will be withdrawn on 2006-03-01.

The CENELEC common modifications have been implemented at the appropriate places in the text and are indicated by tags [C] (C].

The UK participation in its preparation was entrusted by Technical Committee CPI/61, Safety of household electrical appliances, to Subcommittee CPL/61/01, Safety of electrical appliances — Motorised appliance group, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed:
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled "International Standards Correspondence Index", or by using the "Search" facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 22, an inside back cover and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

Amendments issued since publication

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 2 July 2003

© BSI 2 July 2003

ISBN 0 580 42170 8

te	Comments

EUROPEAN STANDARD

EN 60335-2-2

NORME EUROPÉENNE

EUROPÄISCHE NORM

March 2003

ICS 13.120: 97.080

Supersedes EN 60335-2-2:1995

English version

Household and similar electrical appliances – Safetv

Part 2-2: Particular requirements for vacuum cleaners and water-suction cleaning appliances

(IEC 60335-2-2:2002, modified)

Appareils électrodomestiques et analogues – Sécurité
Partie 2-2: Règles particulières pour les aspirateurs et les appareils de nettoyage à aspiration d'eau (CEI 60335-2-2:2002, modifiée)

Sicherheit elektrischer Geräte für den Hausgebrauch und ähnliche Zwecke Teil 2-2: Besondere Anforderungen für Staubsauger und Wassersauger (IEC 60335-2-2:2002, modifiziert)

This European Standard was approved by CENELEC on 2003-03-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovakia, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization Comité Européen de Normalisation Electrotechnique Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

© 2003 CENELEC - All rights of exploitation in any form and by any means reserved worldwide for CENELEC members.

Ref. No. EN 60335-2-2:2003 E

Foreword

The text of document 61/2110/FDIS, future fifth edition of IEC 60335-2-2, prepared by the IEC Technical Committee 61, was submitted to the IEC-CENELEC parallel vote.

As a result of the Kista meeting of CENELEC TC 61 in May 2002, a draft amendment prAA containing the relevant existing common modifications was submitted to the formal vote.

The texts of the FDIS and the prAA were approved by CENELEC as a new edition of EN 60335-2-2 on 2003-03-01.

This European Standard replaces EN 60335-2-2:1995 + A1:1998 + A2:2000.

The following dates are applicable:

 latest date by which the EN has to be implemented at national level by publication of an identical national standard or by endorsement

(dop) 2004-03-01

 date on which national standards conflicting with the EN have to be withdrawn

(dow) 2006-03-01

This part 2 has to be used in conjunction with EN 60335-1, Household and similar electrical appliances – Safety – Part 1: General requirements. It was established on the basis of the 2002 edition of that standard. Amendments and revisions of Part 1 have also to be taken into account and the dates when such changes become applicable will be stated in the relevant amendment or revision of Part 1.

This part 2 supplements or modifies the corresponding clauses of EN 60335-1, so as to convert it into the European Standard: Safety requirements for electric vacuum cleaners and water-suction cleaning appliances.

When a particular subclause of Part 1 is not mentioned in this part 2, that subclause applies as far as is reasonable. When this standard states "addition", "modification" or "replacement", the relevant text of Part 1 is to be adapted accordingly.

NOTE 1 The following numbering system is used:

- subclauses, tables and figures that are numbered starting from 101 are additional to those in Part 1;
- unless notes are in a new subclause or involve notes in Part 1, they are numbered starting from 101, including those in a replaced clause or subclause;
- additional annexes are lettered AA, BB, etc.;
- subclauses, notes and annexes that are additional to those in the IEC standard are prefixed with the letter Z.

NOTE 2 The following print types are used:

- requirements: in roman type;
- test specifications: in italic type;
- notes: in small roman type.

Words in **bold** in the text are defined in Clause 3. When a definition concerns an adjective, the adjective and the associated noun are also in bold.

There are no special national conditions causing a deviation from this European Standard, other than those listed in Annex ZA to EN 60335-1.

There are no national deviations from this European Standard, other than those listed in Annex ZB to EN 60335-1.

p NOTE In this document, p is used in the margin to indicate instructions for preparing the printed version.

Introduction

An investigation by CENELEC TC 61 has shown that all risks from products within the scope of this standard are fully covered by the Low Voltage Directive, 73/23/EEC. For products having mechanical moving parts, a risk assessment in accordance with the Machinery Directive, 98/37/EC, has shown that the risks are mainly of electrical origin and consequently this directive is not applicable. However, the relevant essential safety requirements of the Machinery Directive are covered by this standard together with the principal objectives of the Low Voltage Directive.

Endorsement notice

The text of the International Standard IEC 60335-2-2:2002 was approved by CENELEC as a European Standard with agreed common modifications.

CONTENTS

INT	RODUCTION	5		
1	Scope	6		
2	Normative references	6		
3	Definitions	7		
4	General requirement	8		
5	General conditions for the tests	8		
6	Classification	8		
7	Marking and instructions	8		
8	Protection against access to live parts	10		
9	Starting of motor-operated appliances	10		
10	Power input and current	10		
11	Heating	10		
12	Void	11		
13	Leakage current and electric strength at operating temperature	11		
14	Transient overvoltages	11		
15	Moisture resistance	11		
16	Leakage current and electric strength	12		
17	Overload protection of transformers and associated circuits	13		
18	Endurance			
19	Abnormal operation	13		
20	Stability and mechanical hazards			
21	Mechanical strength	14		
22	Construction	16		
23	Internal wiring	16		
24	Components	16		
25	Supply connection and external flexible cords			
26	Terminals for external conductors			
27	Provision for earthing	17		
28	Screws and connections			
29	Clearances, creepage distances and solid insulation			
30	Resistance to heat and fire			
31	Resistance to rusting	17		
	Radiation, toxicity and similar hazards			
	·			
	nexes	Z1		
Anı	nex ZC (normative) Normative references to international publications withg their corresponding European publications	21		
Bib	liography			
_	ure 101 – Apparatus for testing the abrasion resistance of current-carrying hoses			
_	ure 102 – Apparatus for testing the resistance to flexing of current-carrying hoses			
Figure 103 – Configuration of the hose for the freezing treatment				
Fig	ure 104 – Flexing positions for the hose after removal from the freezing cabinet	20		

INTRODUCTION

It has been assumed in the drafting of this International Standard that the execution of its provisions is entrusted to appropriately qualified and experienced persons.

This standard recognizes the internationally accepted level of protection against hazards such as electrical, mechanical, thermal, fire and radiation of appliances when operated as in normal use taking into account the manufacturer's instructions. It also covers abnormal situations that can be expected in practice.

This standard takes into account the requirements of IEC 60364 as far as possible so that there is compatibility with the wiring rules when the appliance is connected to the supply mains. However, national wiring rules may differ.

If an appliance within the scope of this standard also incorporates functions that are covered by another part 2 of IEC 60335, the relevant part 2 is applied to each function separately, as far as is reasonable. If applicable, the influence of one function on the other is taken into account.

This standard is a product family standard dealing with the safety of appliances and takes precedence over horizontal and generic standards covering the same subject.

An appliance that complies with the text of this standard will not necessarily be considered to comply with the safety principles of the standard if, when examined and tested, it is found to have other features which impair the level of safety covered by these requirements.

An appliance employing materials or having forms of construction differing from those detailed in the requirements of this standard may be examined and tested according to the intent of the requirements and, if found to be substantially equivalent, may be considered to comply with the standard.

HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY –

Part 2-2: Particular requirements for vacuum cleaners and water-suction cleaning appliances

1 Scope

This clause of Part 1 is replaced by the following.

This International Standard deals with the safety of electric vacuum cleaners and watersuction cleaning appliances for household and similar purposes, including vacuum cleaners for animal grooming, their rated voltage being not more than 250 V. It also applies to centrally-sited vacuum cleaners.

This standard also applies to **motorized cleaning heads** and current-carrying hoses associated with a particular vacuum cleaner.

Appliances not intended for normal household use, but which nevertheless may be a source of danger to the public, such as appliances intended to be used by laymen in shops and other premises for normal housekeeping purposes, are within the scope of this standard.

NOTE 101 Examples of such appliances are appliances intended to be used for normal housekeeping purposes in hotels, offices, schools, hospitals and similar premises.

As far as is practicable, this standard deals with the common hazards presented by appliances that are encountered by all persons in and around the home. However, in general, it does not take into account

- the use of appliances by young children or infirm persons without supervision;
- playing with the appliance by young children.

NOTE 102 Attention is drawn to the fact that

- for appliances intended to be used in vehicles or on board ships or aircraft, additional requirements may be necessary;
- in many countries additional requirements are specified by the national health authorities, the national authorities responsible for the protection of labour, the national water supply authorities and similar authorities.

NOTE 103 This standard does not apply to

- appliances intended exclusively for industrial purposes;
- appliances intended to be used in locations where special conditions prevail, such as the presence of a corrosive or explosive atmosphere (dust, vapour or gas).

2 Normative references

This clause of Part 1 is applicable except as follows.

Addition:

ISO 3864, Safety colours and safety signs

ISO 6344-2, Coated abrasives – Grain size analysis – Part 2: Determination of grain size distribution of macrogrits P12 to P220

3 Definitions

This clause of Part 1 is applicable except as follows.

3.1.4 Addition:

NOTE 101 For appliances incorporating a **booster setting**, the **rated power input** corresponds to the operation of the appliance without the **booster setting** being used.

3.1.9 Replacement:

normal operation

operation of the appliance under the following conditions

The appliance is supplied at **rated voltage** and operated continuously with the air inlet adjusted to give a power input $P_{\rm m}$ after 20 s. Three minutes later a final adjustment of the air inlet is made, if necessary.

 $P_{\rm m}$ is calculated from the formula:

$$P_{\rm m}$$
 = 0,5 ($P_{\rm f}$ + $P_{\rm i}$)

where

- Pf is the power input in watts, after 3 min of operation with the air inlet unobstructed. Any device that ensures a flow of air to cool the motor in the event of a blockage of the main air inlet is allowed to operate;
- *P*_i is the power input in watts, after a further 20 s of operation with the air inlet blocked. Any device that is adjustable without the aid of a **tool**, and which ensures a flow of air to cool the motor in the event of a blockage of a main air inlet, is rendered inoperative.

If the appliance is marked with a **rated voltage range**, it is supplied at the mean value of the range if the difference between the limits of the range does not exceed 10 % of the mean value. If the difference exceeds 10 %, the supply voltage is the upper value of the range.

The measurements are made with the appliance fitted with a clean dust bag and filter, any water collection container being empty. If the appliance is intended to be used only with a hose, detachable nozzles and tubes are removed and the hose is laid out straight. If the appliance is provided with a hose as an accessory, it is operated without the hose.

Rotating brushes and similar devices are in operation but not in contact with any surface. **Motorized cleaning heads** are connected by means of the hose or tube and are in operation but not in contact with any surface.

Appliance outlets for other accessories are loaded with a resistive load in accordance with the marking.

3.101

water-suction cleaning appliance

appliance for aspirating an aqueous solution that may contain foaming detergent

3.102

booster setting

position of a control resulting in a temporary higher power input that is automatically reduced to the power input value when the setting is not used

3.103

centrally-sited vacuum cleaner

vacuum cleaner that is connected to a ducting system installed in the building

NOTE During use, the nozzle and its associated hose are connected to one of the suction inlets of the ducting system.

3.104

motorized cleaning head

accessory containing a motor that is supplied from the vacuum cleaner and which is attached to the end of a hose or tube

4 General requirement

This clause of Part 1 is applicable.

5 General conditions for the tests

This clause of Part 1 is applicable except as follows.

5.2 Addition:

A new hose is used for each of the tests of 21.101 to 21.104.

5.101 Current-carrying hoses operating at **safety extra-low voltage** are not subjected to the tests of 21.101 to 21.104.

6 Classification

This clause of Part 1 is applicable except as follows.

6.1 Modification:

© Vacuum cleaners intended for household use only, other than centrally-sited vacuum cleaners, and vacuum cleaners for animal grooming shall be class II or class III.

Other vacuum cleaners and water suction cleaning appliances shall be class I, class II or class III. (C)

6.2 Addition:

Vacuum cleaners for animal grooming and water-suction cleaning appliances shall be at least IPX4.

7 Marking and instructions

This clause of Part 1 is applicable except as follows.

7.1 Addition:

The appliance shall be marked with the sum of its **rated power input** and the maximum load of the appliance outlet in watts (if applicable).

7.6 Addition:



[symbol 5935 of IEC 60417]

motorized cleaning head

water-suction cleaning

7.12 Addition:

The instructions for appliances having a current-carrying hose operating at other than **safety extra-low voltage** shall include the substance of the following:

CAUTION: This hose contains electrical connections:

- do not use to suck up water (for vacuum cleaners only);
- do not immerse in water for cleaning;
- the hose should be checked regularly and must not be used if damaged.

The instructions for vacuum cleaners incorporating rotating brushes or similar devices, and water-suction cleaning appliances, shall state that the plug must be removed from the socket-outlet before cleaning or maintaining the appliance.

If symbol 5935 of IEC 60417 is used, its meaning shall be explained.

7.14 Addition:

The height of symbol 5935 of IEC 60417-1 shall be at least 15 mm.

Compliance is checked by measurement.

7.101 Motorized cleaning heads shall be marked with

- rated voltage or rated voltage range in volts;
- rated power input in watts;
- name, trade mark or identification mark of the manufacturer or responsible vendor;
- model or type reference.

Motorized cleaning heads for water-suction cleaning appliances, except those of class III construction having a working voltage up to 24 V, shall be marked with symbol 5935 of IEC 60417-1.

NOTE This symbol is an information sign and, except for the colours, the rules of ISO 3864 apply.

Compliance is checked by inspection.

7.102 Appliance outlets for accessories shall be marked with the maximum load in watts.

NOTE This marking may be on the appliance close to the appliance outlet.

Compliance is checked by inspection.

8 Protection against access to live parts

This clause of Part 1 is applicable except as follows.

8.1.1 Addition:

If the instructions state that a part is to be removed when replacing a lamp or a drive belt, and a **tool** is required for its removal, the part is not considered to be a **detachable part** provided that

- an instruction to disconnect the appliance from the supply before opening is marked on the cover or is visible during its removal, and
- after removal of the cover, access to live parts is prevented by at least basic insulation.

9 Starting of motor-operated appliances

This clause of Part 1 is not applicable.

10 Power input and current

This clause of Part 1 is applicable except as follows.

10.1 Addition:

The power input of motorized cleaning heads is measured separately.

NOTE 101 Appliance outlets are not loaded when measuring the rated power input.

Booster settings are not used during these measurements.

11 Heating

This clause of Part 1 is applicable except as follows.

11.3 Addition

NOTE 101 When measuring the power input to ensure that the appliance has been correctly reassembled, the power input P_i with the air-inlet blocked is measured.

11.5 Addition:

Booster settings are activated as often as allowed by the construction.

11.7 Addition:

Appliances are operated until steady conditions are established.

Appliances incorporating an automatic cord reel are operated with one-third of the total length of the cord unreeled for 30 min, after which the cord is completely unreeled.

12 Void

13 Leakage current and electric strength at operating temperature

This clause of Part 1 is applicable except as follows.

13.1 Addition:

NOTE 101 Booster settings are not used.

14 Transient overvoltages

This clause of Part 1 is applicable.

15 Moisture resistance

This clause of Part 1 is applicable except as follows.

15.2 Replacement:

Appliances having a liquid container shall be constructed so that spillage of liquid due to overfilling, and due to overturning of appliances liable to be overturned in normal use, does not affect their electrical insulation.

Compliance is checked by the following test.

The liquid container is filled with water to half the level indicated in the instructions. The appliance is placed on a support inclined at an angle of 10° to the horizontal. A force of 180 N is applied to the top of the appliance in the most unfavourable horizontal direction. If the appliance overturns, it is considered to be liable to be overturned in normal use.

Appliances with **type X attachment**, except those having a specially prepared cord, are fitted with the lightest permissible type of flexible cord of the smallest cross-sectional area specified in Table 13.

Appliances incorporating an appliance inlet are tested with or without an appropriate connector in position, whichever is more unfavourable.

Liquid containers that are filled by hand are completely filled with water containing approximately 1 % NaCl and a further quantity, equal to 15 % of the capacity of the container or 0,25 l, whichever is the greater, is poured in steadily over a period of 1 min.

Containers of **hand-held appliances** and other appliances liable to be overturned in normal use are completely filled, the cover being closed. The appliance is then overturned and left in that position for 5 min, unless it returns automatically to its normal position of use.

Nozzles and motorized cleaning heads of water-suction cleaning appliances are placed in a container, the base of which is level with the surface supporting the appliance. The container is filled with a detergent solution to a level of 5 mm above its base, this level being maintained throughout the test. The solution consists of 20 g of NaCl and 1 ml of a solution of 28 % by mass of dodecyl sodium sulphate in each 8 l of water.

The appliance is operated until its liquid container is completely full and for a further 5 min.

NOTE 101 The solution is to be stored in a cool atmosphere and used within seven days of its preparation.

NOTE 102 The chemical designation of dodecyl sodium sulphate is $C_{12}H_{25}NaSO_4$.

After each of these tests, the appliance shall withstand the electric strength test of 16.3.

Inspection shall show that there is no trace of liquid on insulation that could result in a reduction of clearances or creepage distances below the values specified in Clause 29.

15.101 Motorized cleaning heads of water-suction cleaning appliances shall be resistant to liquids that may come into contact with them.

Compliance is checked by the following tests.

The motorized cleaning head is subjected to an impact test as described in IEC 60068-2-75, the value of the impact being 2 J. The motorized cleaning head is rigidly supported and three blows are applied to every point of the enclosure that is likely to be weak.

It is then subjected to the free-fall test procedure 1 of IEC 60068-2-32. It is dropped 4 000 times from a height of 100 mm onto a steel plate having a thickness of not less than 15 mm. It is dropped

- 1 000 times on its right side;
- 1 000 times on its left side:
- 1 000 times on its front face;
- 1 000 times on its cleaning surface.

The motorized cleaning head is then subjected to the test described in 14.2.7 of IEC 60529, the water containing approximately 1 % NaCl.

The motorized cleaning head shall then withstand the electric strength test of 16.3, the voltage being applied between the live parts and the solution. Inspection shall show that there is no trace of saline solution on insulation that could result in a reduction of clearances or creepage distances below the values specified in Clause 29.

NOTE The test is not carried out on motorized cleaning heads of class III construction having a working voltage up to 24 V.

16 Leakage current and electric strength

This clause of Part 1 is applicable except as follows.

16.3 Addition:

Current-carrying hoses, except for their electrical connections, are immersed for 1 h in water containing approximately 1 % NaCl, at a temperature of 20 °C \pm 5 °C. While the hose is still immersed, a voltage of 2 000 V is applied for 5 min between each conductor and all the other conductors connected together. A voltage of 3 000 V is then applied for 1 min between all the conductors and the saline solution.

17 Overload protection of transformers and associated circuits

This clause of Part 1 is applicable.

18 Endurance

This clause of Part 1 is not applicable.

19 Abnormal operation

This clause of Part 1 is applicable except as follows.

19.1 Addition:

The test of 19.7 is only carried out on motorized cleaning heads.

Water-suction cleaning appliances having a valve are also subjected to the test of 19.101.

Appliances incorporating a **booster setting** that is not deactivated electronically, are also subjected to the test of 19.102.

Centrally-sited vacuum cleaners are also subjected to the tests of 19.103, and 19.104 if applicable.

19.7 Addition:

Motorized cleaning heads are tested with the rotating brush or similar device locked for 30 s.

19.9 Not applicable.

19.10 Replacement:

Appliances incorporating series motors are supplied at 1,3 times **rated voltage** and operated for 30 s with the air inlet blocked, rotating brushes and similar devices being removed.

After this test, the safety of the appliance shall not have been impaired, in particular windings and connections shall not have worked loose.

19.101 Water-suction cleaning appliances, the liquid container of which incorporates a valve or other overfill prevention device, are supplied at rated voltage. The appliance is operated with the nozzle placed in a trough containing water and with the valve or overfill prevention-device held open or otherwise rendered inoperative. The test is terminated 30 s after water starts to flow out of the appliance.

NOTE If the appliance incorporates more than one overfill prevention device, these are rendered inoperative in turn.

- **19.102** The deactivating means of the **booster setting** is rendered inoperative and the appliance is operated under the conditions specified in Clause 11 using the **booster setting**.
- **19.103** Centrally-sited vacuum cleaners are supplied at rated voltage and operated with the inlet for the suction hose open and then closed.

The temperatures of the windings shall not exceed the values specified in 19.9.

19.104 Centrally-sited vacuum cleaners with separate ventilation for the motor are supplied at rated voltage and operated with the airflow through the motor blocked.

20 Stability and mechanical hazards

This clause of Part 1 is applicable except as follows.

20.1 Addition:

NOTE 101 Motorized cleaning heads are not subjected to this test.

20.2 Addition:

NOTE 101 The requirement regarding moving parts does not apply to rotating brushes and similar devices. It does not apply to parts that become accessible when changing accessories and only move when the brush or similar device is in operation.

21 Mechanical strength

This clause of Part 1 is applicable except as follows.

21.101 Current-carrying hoses shall be resistant to crushing.

Compliance is checked by the following test.

The hose is placed between two parallel steel plates each having a length of 100 mm, a width of 50 mm and the edges of the longer sides rounded with a radius of 1 mm. The axis of the hose is positioned at right angles to the longer sides of the plates. The plates are placed at a distance of approximately 350 mm from one end of the hose.

The steel plates are pressed together at a rate of 50 mm/min \pm 5 mm/min until the applied force is 1,5 kN. The force is then released and the electric strength test of 16.3 is carried out between the conductors connected together and the saline solution.

21.102 Current-carrying hoses shall be resistant to abrasion.

Compliance is checked by the following test.

One end of the hose is attached to the connecting rod of the crank mechanism shown in Figure 101. The crank rotates at 30 revolutions per minute resulting in the end of the hose moving horizontally backwards and forwards over a distance of 300 mm.

The hose is supported by a rotating smooth roller over which a belt of abrasive cloth moves at a speed of 0,1 m/min. The abrasive is corundum grit size P 100, as specified in ISO 6344-2. A mass of 1 kg is suspended from the other end of the hose, which is guided to avoid rotation. In the lowest position, the mass has a maximum distance of 600 mm from the centre of the roller

The test is carried out for 100 revolutions of the crank.

After the test, **basic insulation** shall not be exposed and the electric strength test of 16.3 is carried out between the conductors connected together and the saline solution.

21.103 Current-carrying hoses shall be resistant to flexing.

Compliance is checked by the following test.

The end of the hose intended to be connected to the **motorized cleaning head** is attached to the pivoting arm of the test equipment shown in Figure 102. The distance between the pivot axis of the arm and the point where the hose enters the rigid part is $300 \text{ mm} \pm 5 \text{ mm}$. The arm can be raised from the horizontal position by an angle of $40^{\circ} \pm 1^{\circ}$. A mass of 5 kg is suspended from the other end of the hose or from a convenient point along the hose so that when the arm is in the horizontal position the mass is supported and there is no tension on the hose.

NOTE 1 It may be necessary to reposition the mass during the test.

The mass slides against an inclined plate so that the maximum deflection of the hose is 3°. The arm is raised and lowered by means of a crank that rotates at a speed of 10 \pm 1 revolutions per minute.

The test is carried out for 2 500 revolutions of the crank after which the fixed end of the hose is turned through 90° and the test continued for a further 2 500 revolutions. The test is repeated in each of the other two 90° positions.

NOTE 2 If the hose ruptures before 10 000 revolutions of the crank, the flexing is terminated.

After the test, the hose shall withstand the electric strength test of 16.3.

21.104 Current-carrying hoses shall be resistant to torsion.

Compliance is checked by the following test.

One end of the hose is held in a horizontal position with the remainder of the hose freely suspended. The free end is rotated in cycles, each cycle consisting of five turns in one direction and five turns in the opposite direction, at a rate of 10 turns per minute.

The test is carried out for 2 000 cycles.

After the test, the hose shall withstand the electric strength test of 16.3 and shall not be damaged to such an extent that compliance with this standard is impaired.

21.105 Current-carrying hoses shall be resistant to cold conditions.

Compliance is checked by the following test.

A 600 mm length of hose is bent as shown in Figure 103 and the ends are tied together over a length of 25 mm. The hose is then placed for 2 h in a cabinet having a temperature of -15 °C \pm 2 °C. Immediately after the hose is removed from the cabinet it is flexed three times, as shown in Figure 104, at a rate of one flexing per second.

The test is carried out three times.

There shall be no cracks or breaks in the hose and it shall withstand the electric strength test of 16.3.

NOTE Any discoloration is neglected.

22 Construction

This clause of Part 1 is applicable except as follows.

22.32 Addition:

Vacuum cleaners shall be constructed so that the internal parts of the motors and electrical connections are not subjected to deposition of dust due to the passage of air.

NOTE 101 This requirement is met if the air passes through the dust bag before it passes through the motor.

NOTE 102 For water-suction cleaning appliances, compliance with the requirement concerning protection against deposition of pollution has been adequately checked by the test of 15.2.

22.40 © Text deleted ©

23 Internal wiring

This clause of Part 1 is applicable.

24 Components

This clause of Part 1 is applicable except as follows.

24.1.3 Addition:

Switches incorporated in vacuum cleaners, other than those for household use only, are tested for 50 000 cycles of operation.

25 Supply connection and external flexible cords

This clause of Part 1 is applicable except as follows.

25.1 Addition:

Vacuum cleaners for animal grooming and water-suction cleaning appliances shall not incorporate an appliance inlet.

25.7 Modification:

Supply cords shall be not lighter than the following:

- for hand-held appliances having a mass not exceeding 1,5 kg when fitted with the heaviest accessory, but excluding the supply cord,
 - if rubber insulated, ordinary tough rubber sheathed flexible cord (code designation 60245 IEC 53);
 - if polyvinyl chloride insulated, light polyvinyl chloride sheathed flexible cord (code designation 60227 IEC 52);
- for appliances for animal grooming,
 - · ordinary polychloroprene sheathed flexible cord (code designation 60245 IEC 57);
 - · if polyvinyl chloride insulated, flat twin flexible cord (code designation 60227 IEC 42);

- for other appliances,
 - if rubber insulated, ordinary tough rubber sheathed flexible cord (code designation 60245 IEC 53);
 - if polyvinyl chloride insulated, ordinary polyvinyl chloride sheathed flexible cord (code designation 60227 IEC 53).

25.23 Addition:

Live conductors in a flexible hose shall have an insulation and sheath thickness at least equivalent to that specified for a 60227 IEC 52 cord of 2×0.75 mm².

NOTE 101 The conductors used may consist of copper-plated steel wires.

26 Terminals for external conductors

This clause of Part 1 is applicable.

27 Provision for earthing

This clause of Part 1 is applicable.

28 Screws and connections

This clause of Part 1 is applicable.

29 Clearances, creepage distances and solid insulation

This clause of Part 1 is applicable.

30 Resistance to heat and fire

This clause of Part 1 is applicable except as follows.

30.2 Addition:


For **centrally-sited vacuum cleaners**, 30.2.3 is applicable. For other appliances, 30.2.2 is applicable.

31 Resistance to rusting

This clause of Part 1 is applicable.

32 Radiation, toxicity and similar hazards

This clause of Part 1 is applicable.

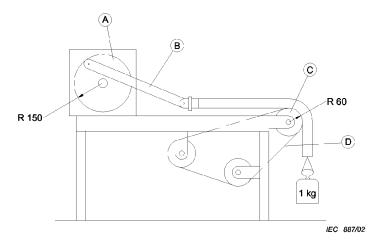



Dimensions in millimetres

Key

- A Crank mechanism
- B Connecting rod
- C Roller, diameter 120 mm
- D Abrasive cloth belt

Figure 101 – Apparatus for testing the abrasion resistance of current-carrying hoses





Dimensions in millimetres

Key

- A Crank mechanism
- B Arm
- C Inclined plane

Figure 102 – Apparatus for testing the resistance to flexing of current-carrying hoses



Dimensions in millimetres

Figure 103 – Configuration of the hose for the freezing treatment




Figure 104 – Flexing positions for the hose after removal from the freezing cabinet

Annexes

The annexes of Part 1 are applicable except as follows.

Annex C (normative)

Ageing test on motors

Modification:

The value of p in Table C.1 is 2 000.

Annex ZC (normative)

Normative references to international publications with their corresponding European publications

<u>Publication</u>	<u>Year</u>	<u>Title</u>	EN/HD	<u>Year</u>
ISO 3864	_1)	Safety colours and safety signs	_	_
ISO 6344-2	_1)	Coated abrasives – Grain size analysis – Part 2: Determination of grain size distribution of macrogrits P12 to P220	-	-


¹⁾ undated reference

Bibliography

The bibliography of Part 1 is applicable except as follows.

Addition:

ISO 3864, Safety colours and safety signs

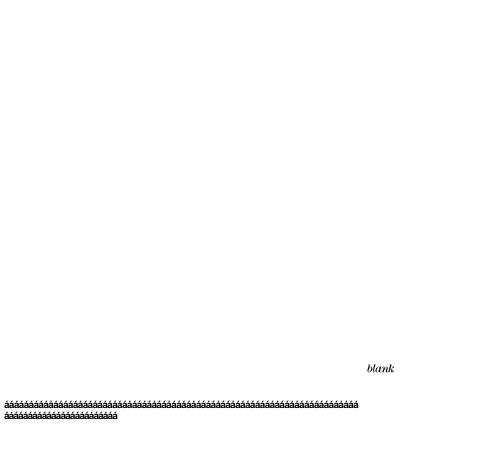

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at http://www.bsi-global.com.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001. Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards

Online can be found at http://www.bsi-global.com/bsonline.

Fourth or information about PSI is a will also at the PSI website at

Further information about BSI is available on the BSI website at http://www.bsi-global.com.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means — electronic, photocopying, recording or otherwise — without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager. Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553. Email: copyright@bsi-global.com.

BSI 389 Chiswick High Road London W4 4AL