



Conducted Emission Measurement


File :ADP90W

Data :#61

Date: 2006/3/20

Time: 下午 02:43:23

97.0 dBuV

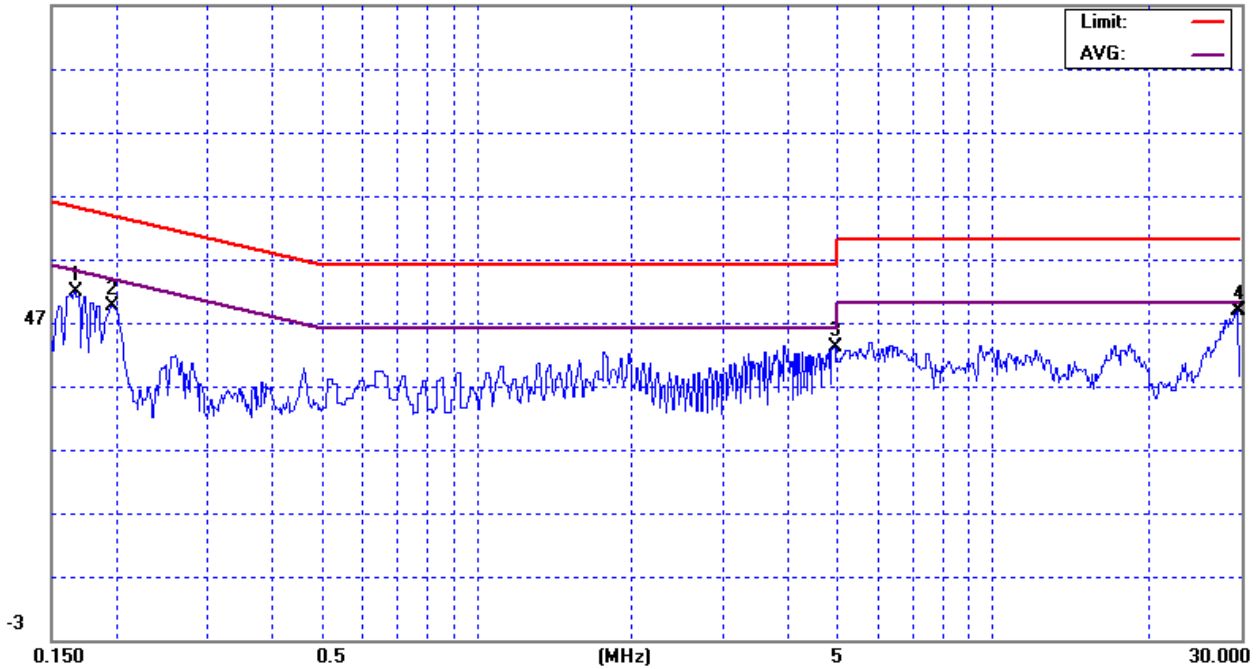

Site C01-BTL

Limit: CISPR22 Class B Conduction(QP)

EUT: ADAPTOR

M/N: 90W

Mode: FULL LOAD

Note:

Phase: **N**

Power: AC 120V/60Hz

Distance:

Temperature: 24 °C

Humidity: 57 %

Air Pressure: 1002. hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1666	41.88	10.00	51.88	65.13	-13.25	peak	
2		0.1964	39.65	10.00	49.65	63.76	-14.11	peak	
3		4.9325	33.17	9.84	43.01	56.00	-12.99	peak	
4		29.8750	38.25	10.52	48.77	60.00	-11.23	peak	
5		29.8750	33.99	10.52	44.51	60.00	-15.49	QP	
6	*	29.8750	28.69	10.52	39.21	50.00	-10.79	AVG	

*:Maximum data x:Over limit !:over margin

●Reference Only



Conducted Emission Measurement


File :ADP90W

Data :#62

Date: 2006/3/20

Time: 下午 02:45:36

97.0 dBuV

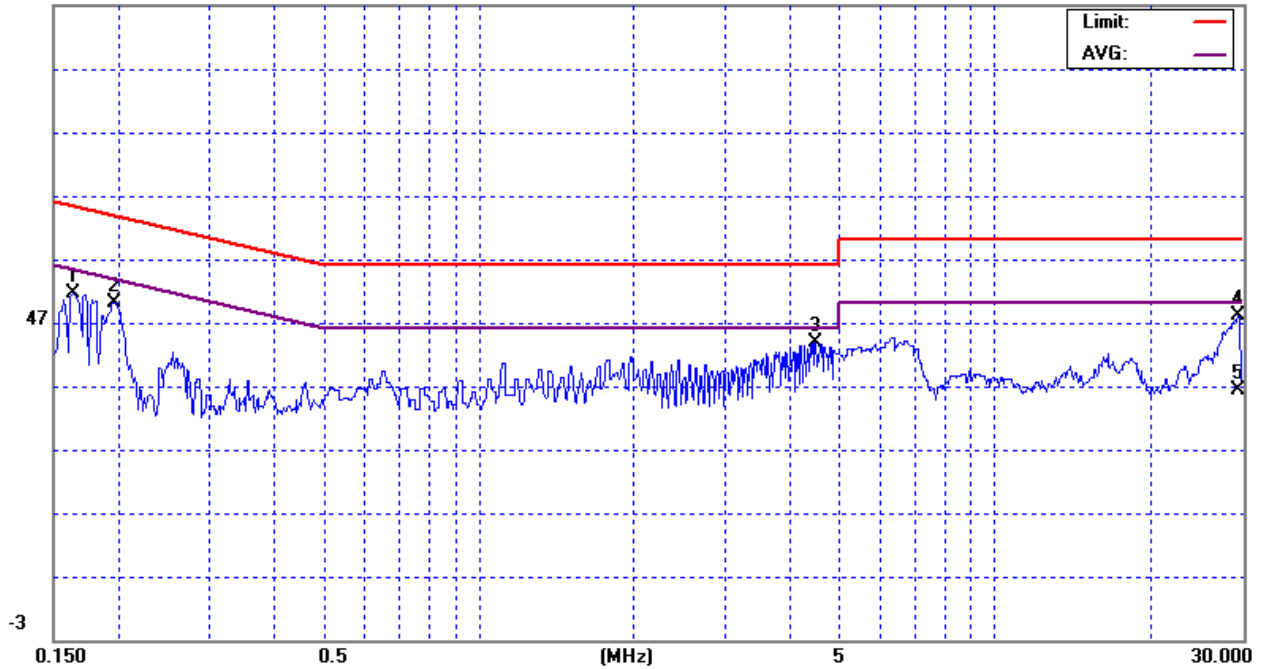

Site C01-BTL

Limit: CISPR22 Class B Conduction(QP)

EUT: ADAPTOR

M/N: 90W

Mode: FULL LOAD

Note:

Phase: **L1**

Power: AC 120V/60Hz

Distance:

Temperature: 24 °C

Humidity: 57 %

Air Pressure: 1002. hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1640	41.56	10.00	51.56	65.26	-13.70	peak	
2		0.1964	40.17	10.00	50.17	63.76	-13.59	peak	
3		4.4825	34.06	9.84	43.90	56.00	-12.10	peak	
4	*	29.6250	37.65	10.52	48.17	60.00	-11.83	peak	
5		29.6250	25.76	10.52	36.28	60.00	-23.72	peak	
6		29.6250	32.10	10.52	42.62	60.00	-17.38	QP	

*:Maximum data x:Over limit !:over margin

●Reference Only