



Radiated Emission Measurement


File :90W

Data :#34

Date: 2006/03/24

Time: 下午 12:45:24

100.0 dBuV/m

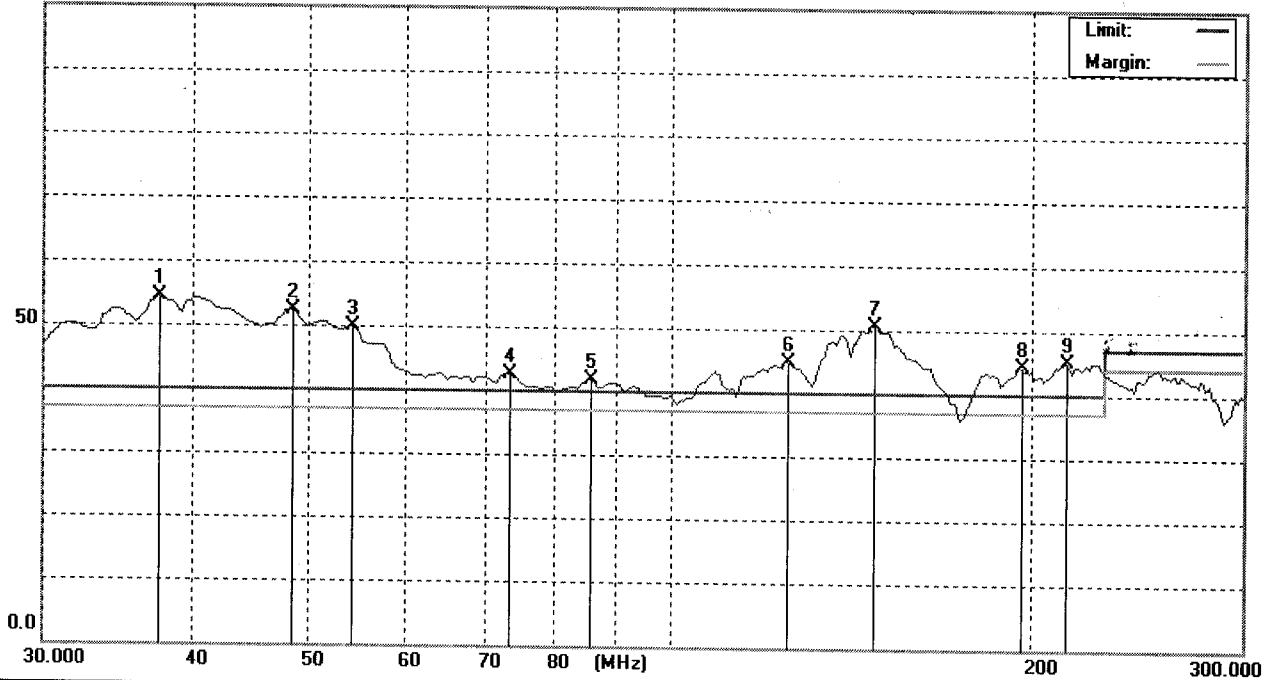

Site CB01-BTL

Polarization: **Vertical**

Temperature: 25.4 °C

Limit: CISPR22 ClassB 3M Radiation

Power: AC 120V/60Hz

Humidity: 55 %

EUT: ADAPTOR

Distance: 3m

Air Pressure: 1000. hpa

M/N: 90W

Mode: FULL LOAD

Note: NO.1

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	37.5600	70.20	-15.93	54.27	40.00	14.27	peak	
2	X	48.3600	73.09	-20.61	52.48	40.00	12.48	peak	
3	X	54.3000	71.77	-21.99	49.78	40.00	9.78	peak	
4	X	73.2000	65.46	-22.75	42.71	40.00	2.71	peak	
5	X	85.6200	63.40	-21.58	41.82	40.00	1.82	peak	
6	X	125.5800	66.80	-21.87	44.93	40.00	4.93	peak	
7	X	147.7200	71.28	-20.67	50.61	40.00	10.61	peak	
8	X	196.3200	63.83	-19.41	44.42	40.00	4.42	peak	
9	X	214.1400	63.55	-18.54	45.01	40.00	5.01	peak	

*:Maximum data x:Over limit !:over margin

●Reference Only