



**Conducted Emission Measurement**


File :WRG15F-120A(SG6848)

Data :#13

Date: 2006/07/15

Time: 下午 03:30:29

80.0 dBuV

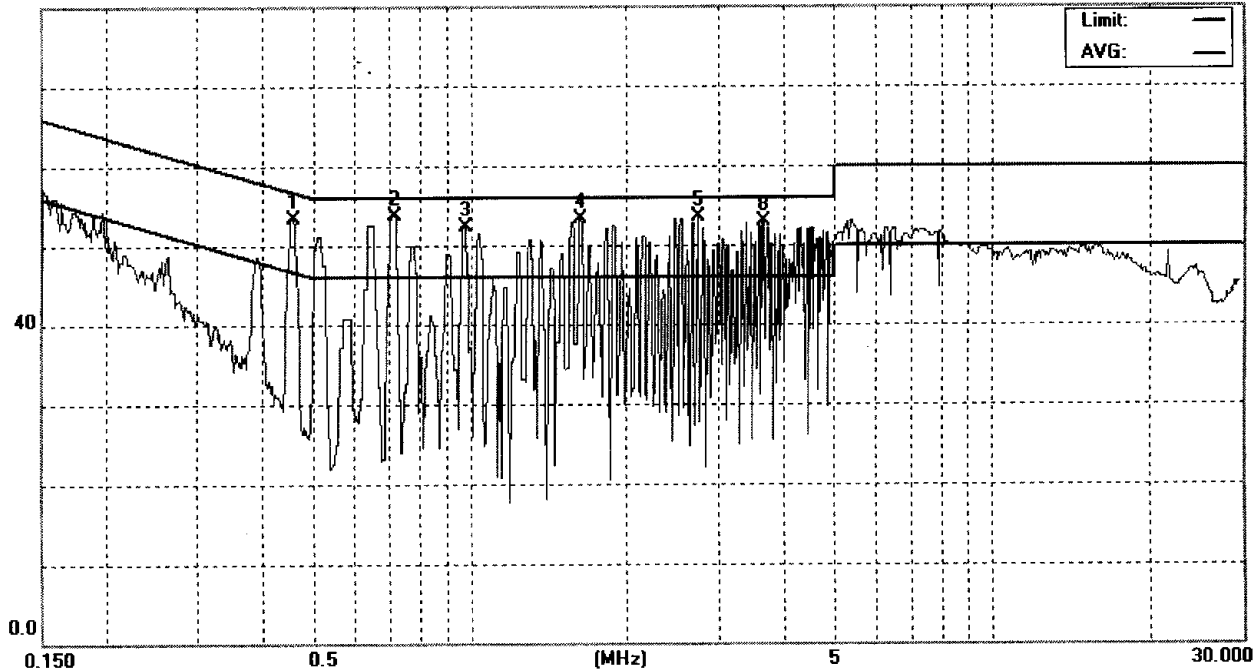

Site C01-BTL

Phase: **L1**

Temperature: 25 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 230V/50Hz

Humidity: 65 %

EUT: Adaptor

Distance:

Air Pressure: 1011. hpa

M/N: WRG15F-120A(SG6848)

Mode:

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4566	43.58	9.79	53.37	56.75	-3.38	peak	
2		0.7160	43.91	9.77	53.68	56.00	-2.32	peak	
3		0.9770	42.50	9.73	52.23	56.00	-3.77	peak	
4		1.6250	43.62	9.72	53.34	56.00	-2.66	peak	
5		2.7410	43.80	9.69	53.49	56.00	-2.51	peak	
6		2.7410	40.90	9.69	50.59	56.00	-5.41	QP	
7	*	2.7410	39.13	9.69	48.82	46.00	2.82	AVG	
8		3.6500	43.30	9.65	52.95	56.00	-3.05	peak	

\*:Maximum data x:Over limit !:over margin

●Reference Only



**Conducted Emission Measurement**


File :WRG15F-120A(SG6848)

Data :#12

Date: 2006/07/15

Time: 下午 03:28:54

80.0 dBuV

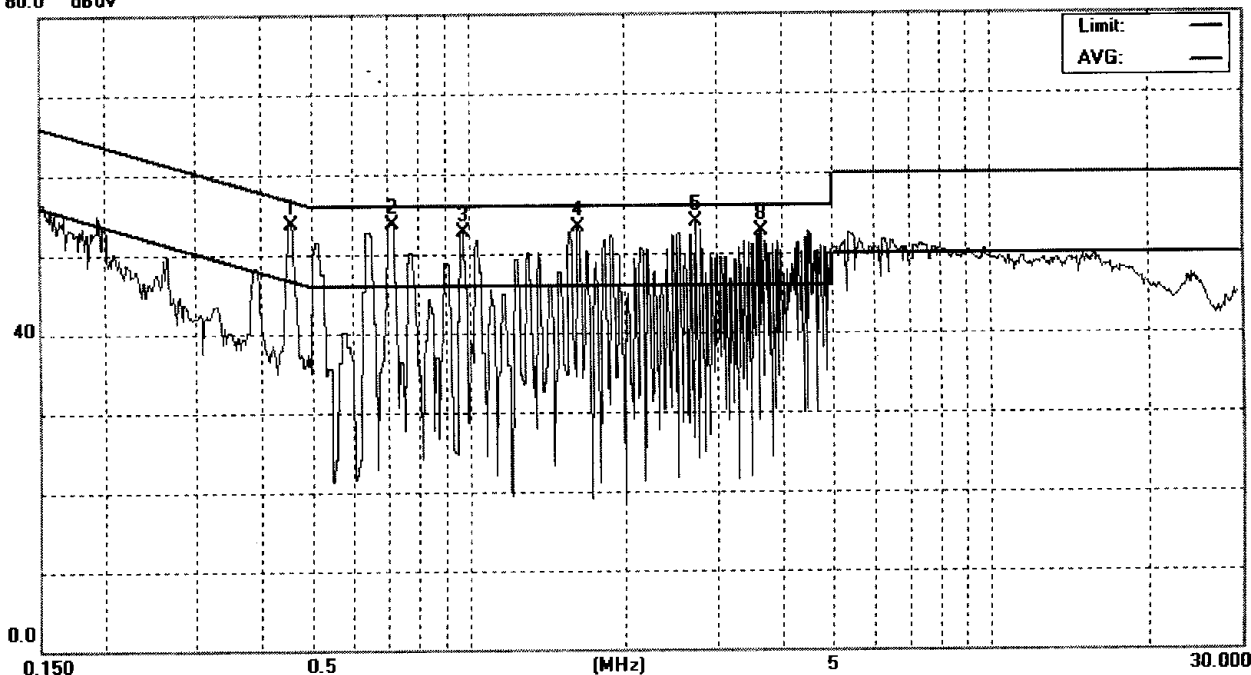

Site C01-BTL

Limit: CISPR22 Class B Conduction(QP)

EUT: Adaptor

M/N: WRG15F-120A(SG6848)

Mode:

Note:

Phase: N

Power: AC 230V/50Hz

Distance:

Temperature: 25 °C

Humidity: 65 %

Air Pressure: 1011. hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4566	43.85	9.79	53.64	56.75	-3.11	peak	
2		0.7160	43.95	9.77	53.72	56.00	-2.28	peak	
3		0.9770	42.91	9.73	52.64	56.00	-3.36	peak	
4		1.6250	43.52	9.72	53.24	56.00	-2.76	peak	
5		2.7320	44.30	9.69	53.99	56.00	-2.01	peak	
6		2.7320	38.76	9.69	48.45	56.00	-7.55	QP	
7	*	2.7320	36.21	9.69	45.90	46.00	-0.10	AVG	
8		3.6500	43.05	9.65	52.70	56.00	-3.30	peak	

\*:Maximum data x:Over limit !:over margin

●Reference Only