



收
 客户要求我们做 2 samples.
 请联络客户取 Bobbin 图纸。 The Silon
 鉅

150°C

REV	DATE	DESCRIPTION	BY	DATE	APP.
4	03X	.155 WWS .175, DIA .120 WWS .090	BE	10/17/92	CAD
3	R.D.	TURNS WAS 12, JUE WAS 20	BE	10/12/92	CAD
2	C	TOL ON WINDH WAS 1.13-1.15"	NS	8-19-95	CAD
1	D	UPDATE TO ROHS COMPLIANT	DB	19-APR-98	CAD
1	E	RELAX TOLS WHERE POSSIBLE	DB	11-05-08	

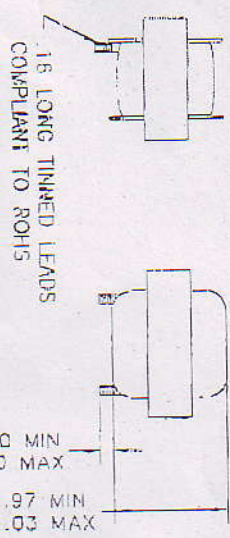

SCHEMATIC

UNCONTROLLED PRINT
 DATE 11-MAY-2008

ASC INVENTORY CONTROL NUMBER 190117

SPECIFICATIONS

13 TURNS - #12AWG WIRE
 22 μ H \pm 10% @ 1 KHz, 0 ADC
 Rdc = 4 m Ω \pm 20%
 CORE: MICROMETALS E-CORE PART # E137-26 OR EQUIVALENT
 BOBBIN: MICROMETALS PART # PB137 OR EQUIVALENT
 RESIN COATED
 BOBBIN TAPED

REV	DATE	DESCRIPTION	BY	DATE	APP.
1	06/20/98	REVISED TO 13 TURNS	BE	06/20/98	
2	07/24/98	REVISED TO 22 μ H	NS	07/24/98	
3	09/24/98	REVISED TO 1.13-1.15" DIA	NS	09/24/98	
4	08/19/98	REVISED TO ROHS COMPLIANT	DB	08/19/98	
5	11-05-08	RELAX TOLS WHERE POSSIBLE	DB	11-05-08	

Atterbic Scientific
 PREMIER SERIES
 INDUCTOR
 1300765
 1500765

68