


SHENZHEN HUATONGWEI INTERNATIONAL INSPECTION CO., LTD

RADIATED EMISSION FCC PART 15 B

EUT: PSQ480D-2F
 Manufacturer: DATAWELL
 Operating Condition: FULL LOAD
 Test Site: 3M CHAMBER
 Operator: NADA
 Test Specification: AC 110V/60Hz
 Comment: Polarization: H
 Start of Test: 9/25/06 / 4:11:10PM

SWEEP TABLE: "test (30M 1G)"

Short Description:	Field Strength	Transducer
Start Stop Detector Meas. IF	Time Bandw.	
Frequency Frequency MaxPeak	500.0 ms 120 kHz	HL562new

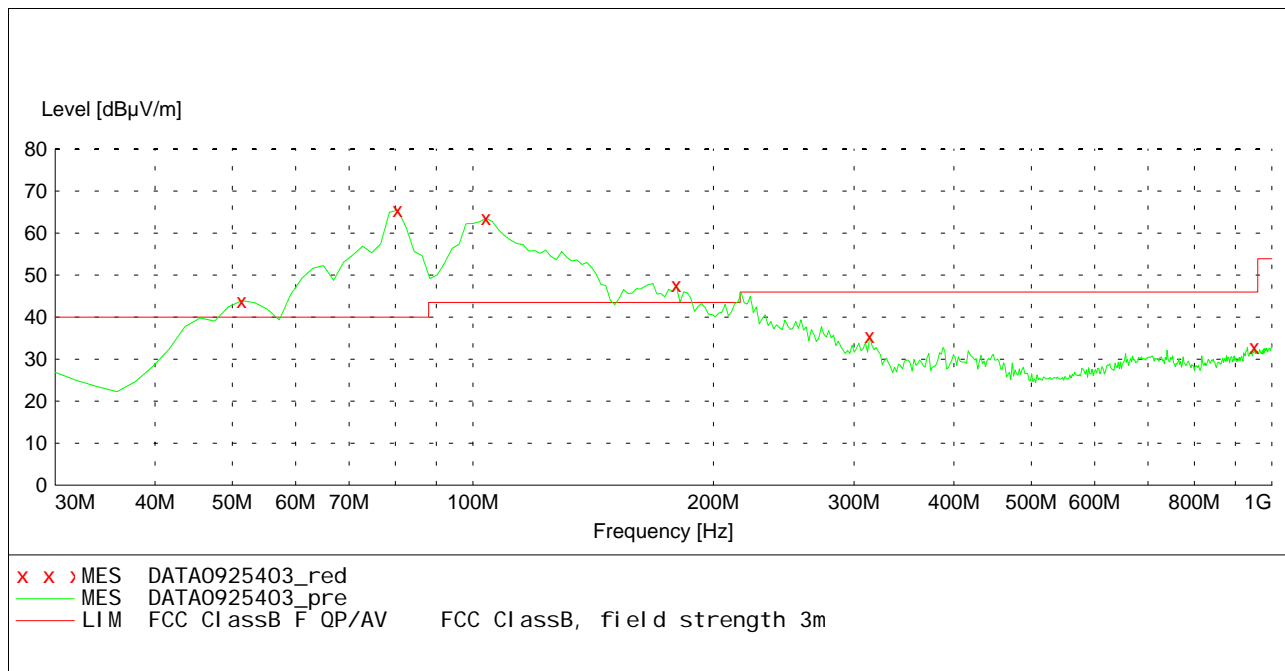

MEASUREMENT RESULT: "DATA0925403_red"

9/25/06 4:13PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
51.382766	43.90	8.9	40.0	-3.9	---	300.0	63.00	HORIZONTAL
80.541082	65.50	11.4	40.0	-25.5	---	300.0	258.00	HORIZONTAL
103.867735	63.60	11.7	43.5	-20.1	---	300.0	17.00	HORIZONTAL
179.679359	47.60	11.5	43.5	-4.1	---	100.0	360.00	HORIZONTAL
313.807615	35.50	14.9	46.0	10.5	---	100.0	111.00	HORIZONTAL
951.402806	32.80	26.4	46.0	13.2	---	300.0	258.00	HORIZONTAL