

CROSS POINTS IN V.A.(0.05\*0.05MM)

CHARACTERISTICS :

- 1) OPERATING VOLTAGE : 5.0 V
- 2) OPERATING TEMPERATURE : -20°C TO 70°C
- 3) STORAGE TEMPERATURE : -25°C TO 80°C
- 4) DRIVING METHOD : IC1:1/3 DUTY, 1/2 BIAS IC2:1/4DUTY,1/3BIAS
- 5) DISPLAY TYPE : TRANSMISSIVE (NEGATIVE)/TN
- 6) VIEWING DIRECTION : 12 O'CLOCK
- 7) CONNECTOR: PIN

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES MILLIMETERS  
TOLERANCES: ANGLES ±1°  
XXX" ±.02"  
XXX" ±.005"  
0.XXmm ±0.5mm  
0.XXXmm ±0.13mm



**HOLYTRON ELECTRONICS (SZ) CO.,LTD**  
TEL: (86-755) 27489030 FAX: (86-755) 27489961

DRAWN BY: **ZLP**

DATE: **06-08-05**

DRAWING NO.:

CHECKED BY:

DATE:

**PEQ06514**

REV NO. REV

APPROVED BY:

DATE:

SCALE:

SHEET NO.:

1 OF 3


DESCRIPTION

INITIALS


CHECKED

DATE




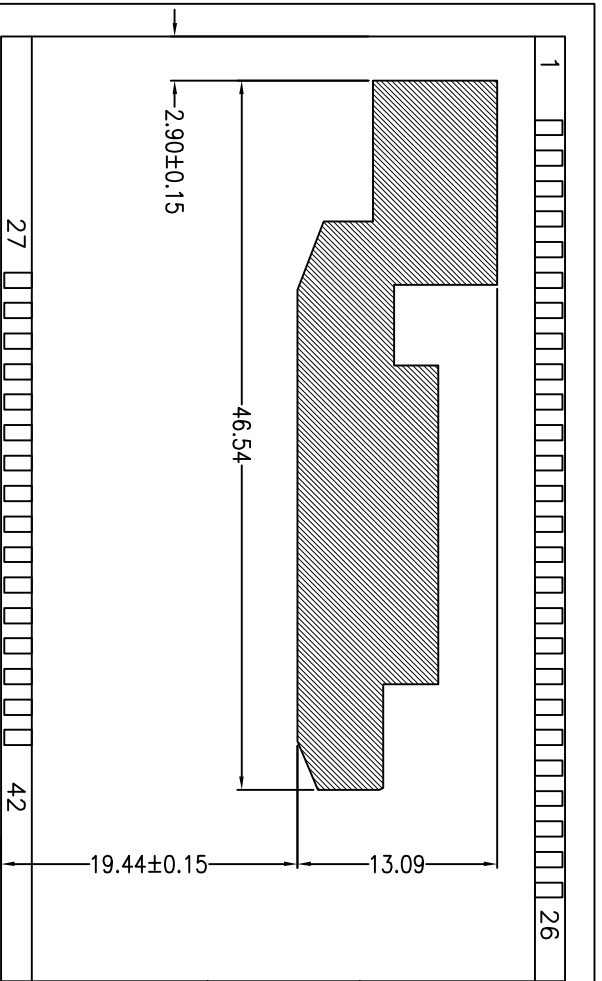


# 底玻璃橙黄色丝印

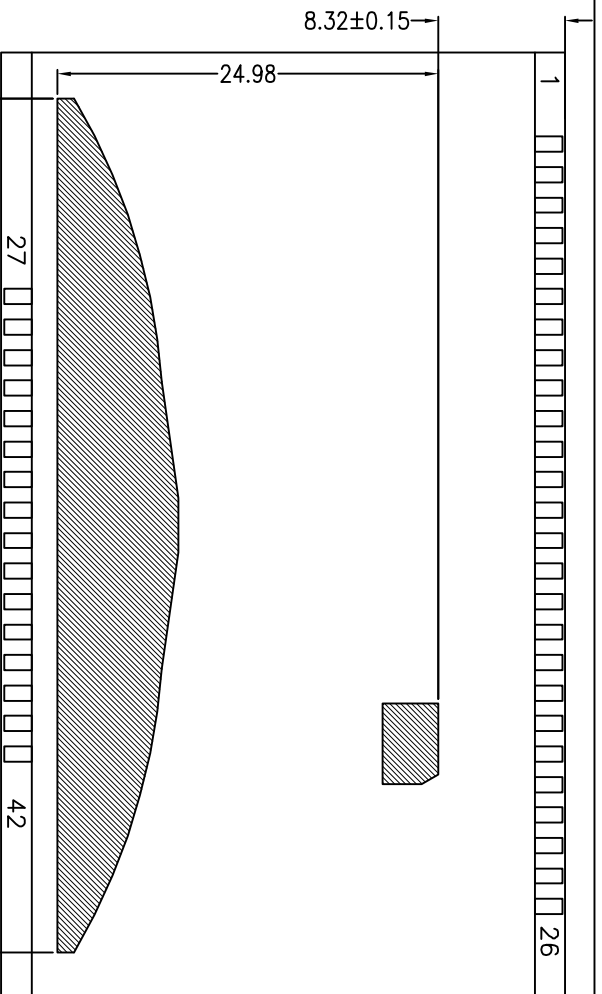

# 底玻璃蓝色丝印

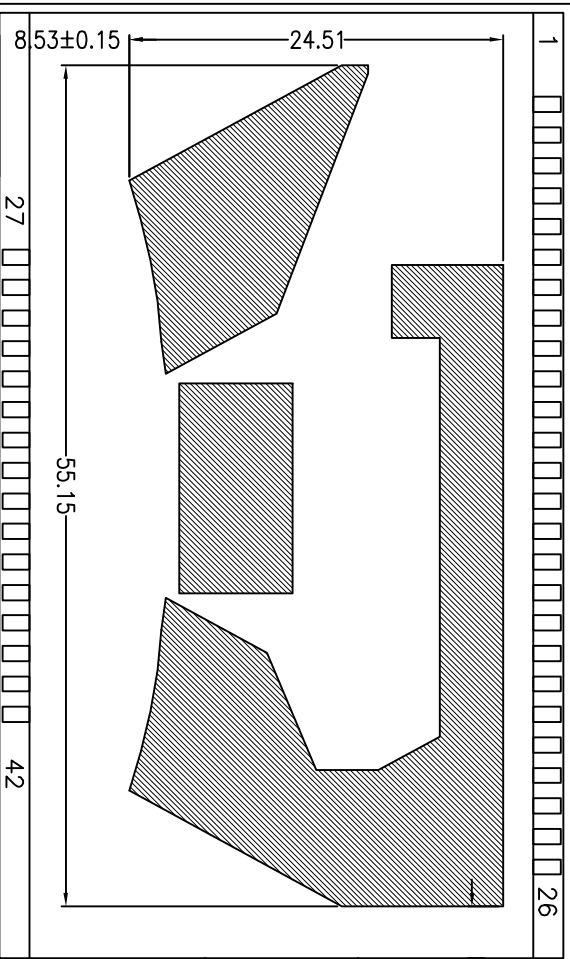

# 底玻璃紫色丝印

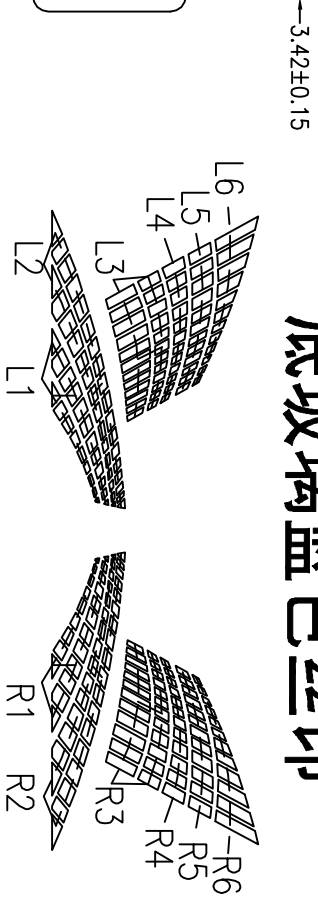

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES MILLIMETERS  
TOLERANCES: ANGLES ±1°  
"XX" ±.02"  
"XXX" ±.005"  
OR  
0.25mm ±0.01mm  
0.25mm ±0.13mm



**HOLYTRON ELECTRONICS (SZ) CO., LTD**  
TEL: (86-755) 27489030 FAX: (86-755) 27489961

TITLE:

DRAWN BY: ZLP

DATE: 06-08-05

DRAWING NO.:

CHECKED BY:

DATE:

PEQ06514

REV NO. REV

A

APPROVED BY:

DATE:

SCALE:

SHEET NO.:

3 OF 3

DESCRIPTION

INITIALS

CHECKED

DATE