




二极气体放电管

2-Electrode Ceramic Gas Discharge Tube

低能量系列/Light duty Types

H2R8 系列 / H2R8 Types

5KA / 5A $\Phi 8 \times 6$ mm

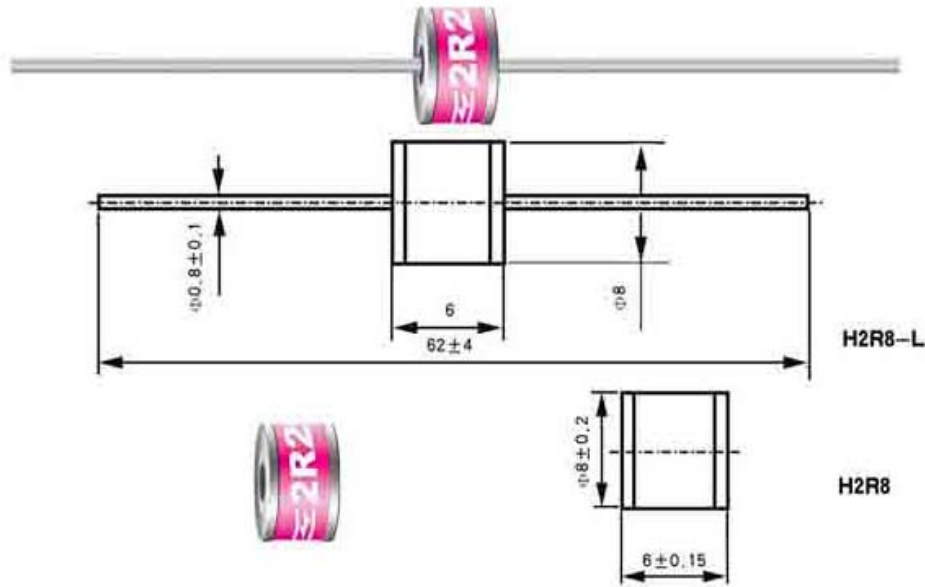

型号 Type	带引线 With wire	H2R8-75L	H2R8-90L	H2R8-150L	H2R8-230L	H2R8-350L	H2R8-470L	H2R8-600L	H2R8-800L
	无引线 Without wire	H2R8-75	H2R8-90	H2R8-150	H2R8-230	H2R8-350	H2R8-470	H2R8-600	H2R8-800
标称直流击穿电压 DC Spark-over Voltage at 100V/s (V)		75	90	150	230	350	470	600	800
直流击穿电压允许范围 Tolerance (%)		±25	±20	±20	±20	±20	±20	±20	±20
冲击击穿电压 Impulse spark-over voltage at 1KV/ μ s (V) - for 99% of measured values - typical values of distribution		≤ 500 ≤ 400	≤ 500 ≤ 400	≤ 500 ≤ 450	≤ 500 ≤ 450	≤ 650 ≤ 500	≤ 800 ≤ 650	≤ 1100 ≤ 950	≤ 1300 ≤ 1050
耐工频电流 AC discharge current at 50Hz, 1s, 5 times (A)		5	5	5	5	5	5	5	5
耐冲击电流 Impulse discharge current at 8/20 μ s, 10 times (5 times each polarity) (kA)		5	5	5	5	5	5	5	5
绝缘电阻 Insulation resistance (Ω)		$\geq 10^9$	$\geq 10^9$	$\geq 10^9$	$\geq 10^9$	$\geq 10^9$	$\geq 10^9$	$\geq 10^9$	$\geq 10^9$
电 容 Capacitance (pF)		≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2