



**Radiated Emission Measurement**


File :GF-06-US0512

Data :#5

Date: 2008/11/22

Time: 上午 11:24:50

80.0 dBuV/m

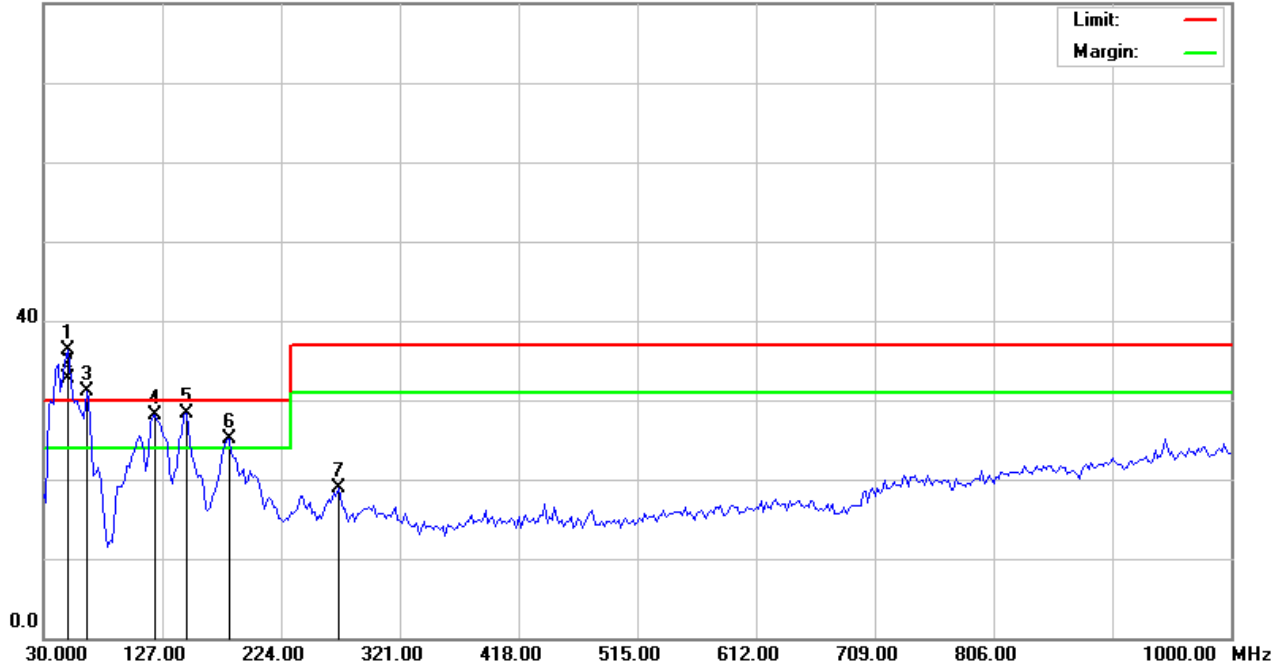

Site DG-CB03

Polarization: **Vertical**

Temperature: 29 °C

Limit: CISPR22 ClassB 10M Radiation

Power: AC 230V/50Hz

Humidity: 54 %

EUT: Adapter

Distance: 10m

M/N: UF-06-US0512

Mode: 5V1.2A

Note: B

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	49.4000	61.14	-24.90	36.24	30.00	6.24	peak	
2	X	49.4000	57.65	-24.90	32.75	30.00	2.75	QP	
3	X	64.9200	55.70	-24.64	31.06	30.00	1.06	peak	
4	!	121.1800	49.81	-21.67	28.14	30.00	-1.86	peak	
5	!	146.4000	49.02	-20.75	28.27	30.00	-1.73	peak	
6	!	181.3200	46.41	-21.26	25.15	30.00	-4.85	peak	
7		270.5600	37.06	-18.11	18.95	37.00	-18.05	peak	

\*:Maximum data    x:Over limit    !:over margin

●Reference Only



### Radiated Emission Measurement


File :GF-06-US0512

Data :#6

Date: 2008/11/22

Time: 上午 11:30:50

80.0 dBuV/m

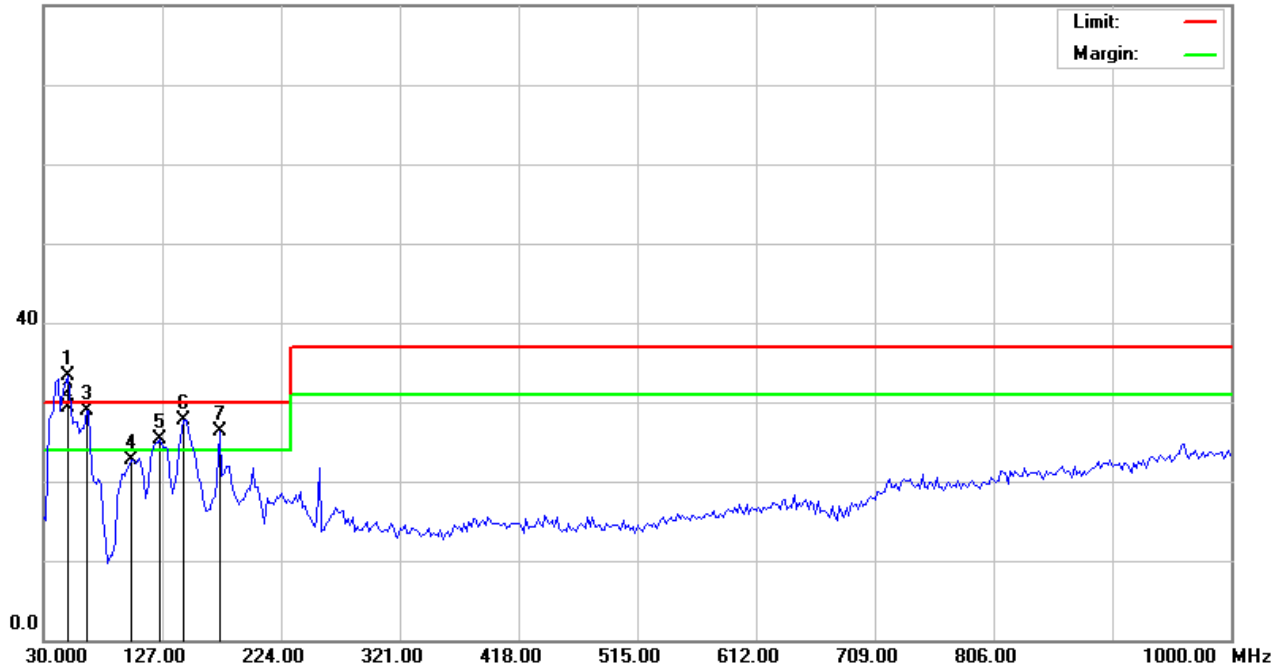

Site DG-CB03

Polarization: **Vertical**

Temperature: 29 °C

Limit: CISPR22 ClassB 10M Radiation

Power: AC 120V/60Hz

Humidity: 54 %

EUT: Adapter

Distance: 10m

M/N: UF-06-US0512

Mode: 5V1.2A

Note: B

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	49.4000	58.17	-24.90	33.27	30.00	3.27	peak	
2	!	49.4000	54.23	-24.90	29.33	30.00	-0.67	QP	
3	!	64.9200	53.59	-24.64	28.95	30.00	-1.05	peak	
4		101.7800	47.09	-24.48	22.61	30.00	-7.39	peak	
5	!	125.0600	46.76	-21.36	25.40	30.00	-4.60	peak	
6	!	144.4600	48.40	-20.75	27.65	30.00	-2.35	peak	
7	!	173.5600	45.92	-19.64	26.28	30.00	-3.72	peak	

\*:Maximum data    x:Over limit    !:over margin

●Reference Only