


EUT:  
 Manuf:  
 Op Cond:  
 Operator:  
 Test Spec:  
 Comment:

Scan Settings (1 Range)			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
30MHz	300MHz	.4%	120kHz	PK+AV	50msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	30MHz	300MHz	MDS21_C09_LOSS

Final Measurement:      Detectors:      X QP / + AV  
 Meas Time:              2sec  
 Peaks:                    8  
 Acc Margin:              25 dB

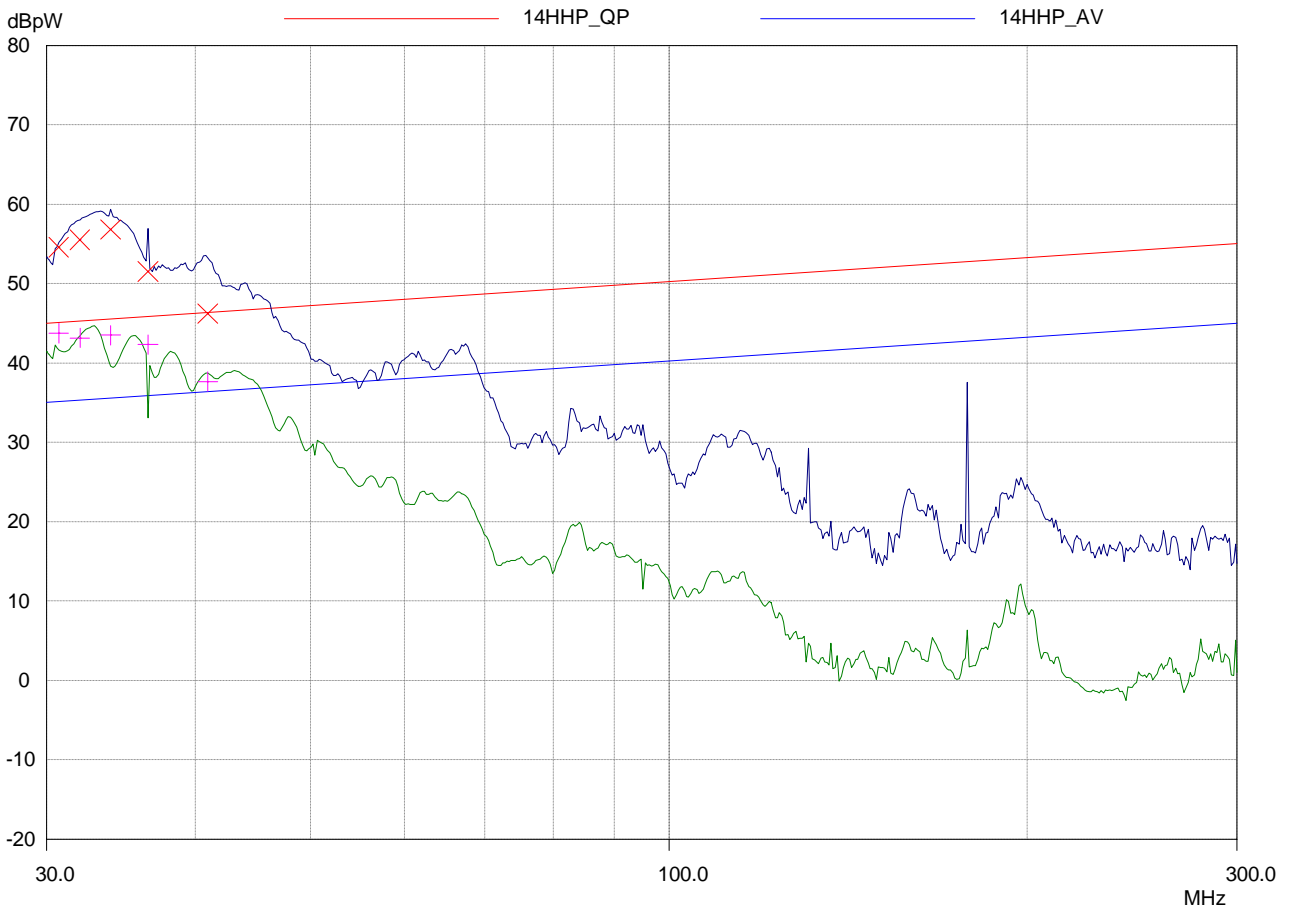

EUT:  
 Manuf:  
 Op Cond:  
 Operator:  
 Test Spec:  
 Comment:

Scan Settings (1 Range)			Receiver Settings					
Frequencies			IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	Step	120kHz	PK+AV	50msec	Auto	OFF	60dB
30MHz	300MHz	.4%						

Transducer	No.	Start	Stop	Name
	1	30MHz	300MHz	MDS21_C09_LOSS

Final Measurement:      Detectors:      X QP / + AV  
 Meas Time:              2sec  
 Peaks:                    8  
 Acc Margin:              25 dB

Final Measurement Results

Frequency MHz	QP Level dBpW	QP Limit dBpW	QP Delta dB
30.72723	54.55*	45.10	-9.45
31.97868	55.49*	45.28	-10.21
33.95207	56.81*	45.54	-11.27
36.48154	51.49*	45.85	-5.64
40.95914	46.19	46.35	0.16

Frequency MHz	AV Level dBpW	AV Limit dBpW	AV Delta dB
30.72723	43.73*	35.10	-8.63
31.97868	43.13*	35.28	-7.85
33.95207	43.48*	35.54	-7.94
36.48154	42.29*	35.85	-6.44
40.95914	37.63*	36.35	-1.28

\* limit exceeded