


EUT:  
 Manuf:  
 Op Cond:  
 Operator:  
 Test Spec:  
 Comment:

Scan Settings (1 Range)			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
30MHz	300MHz	.4%	120kHz	PK+AV	50msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	30MHz	300MHz	MDS21_C09_LOSS

Final Measurement:      Detectors:      X QP / + AV  
 Meas Time:              2sec  
 Peaks:                    8  
 Acc Margin:              25 dB

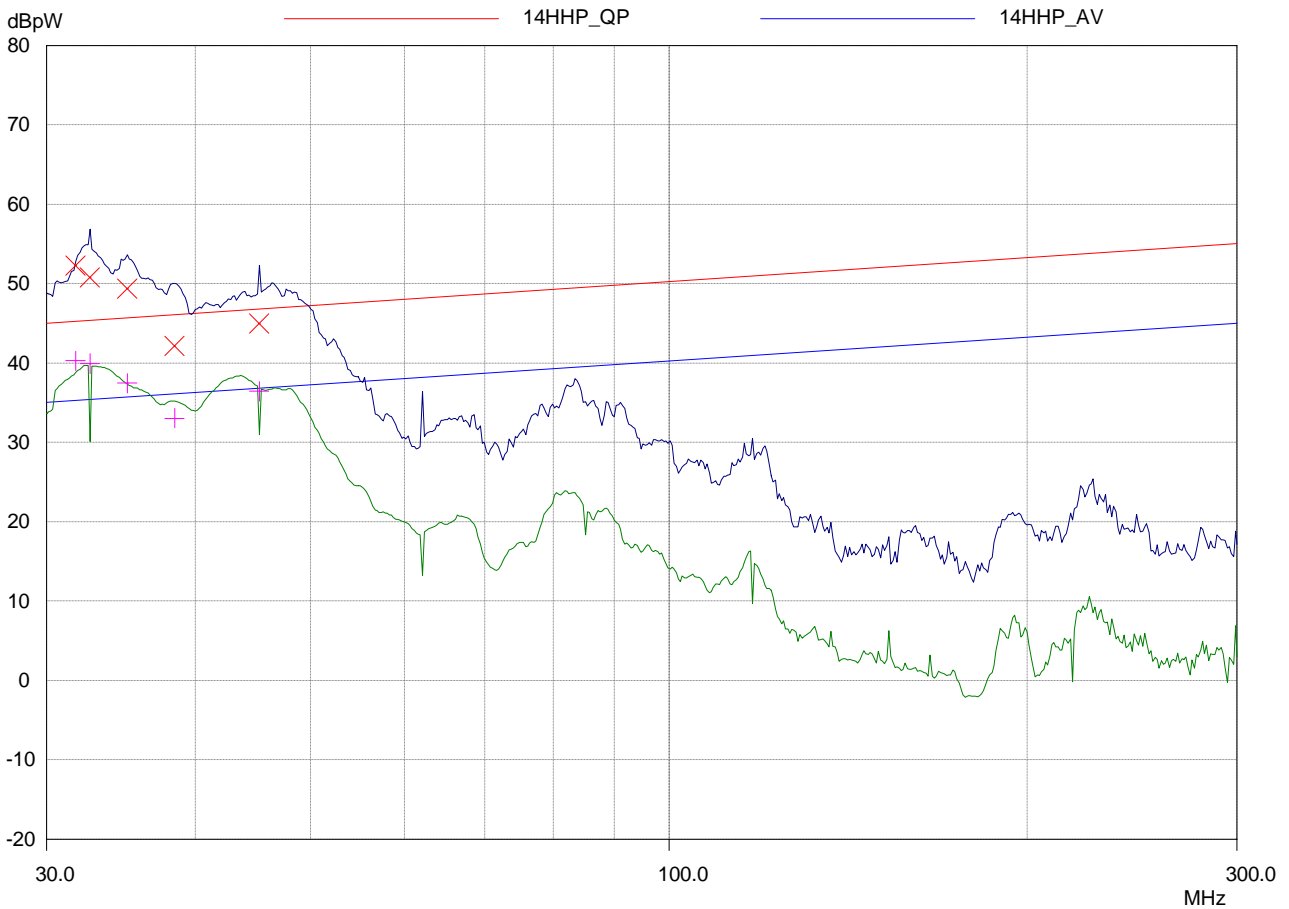

EUT:  
 Manuf:  
 Op Cond:  
 Operator:  
 Test Spec:  
 Comment:

Scan Settings (1 Range)			Receiver Settings					
Frequencies			IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	Step	120kHz	PK+AV	50msec	Auto	OFF	60dB
30MHz	300MHz	.4%						

Transducer	No.	Start	Stop	Name
	1	30MHz	300MHz	MDS21_C09_LOSS

Final Measurement:      Detectors:      X QP / + AV  
 Meas Time:              2sec  
 Peaks:                    8  
 Acc Margin:              25 dB

Final Measurement Results

Frequency MHz	QP Level dBpW	QP Limit dBpW	QP Delta dB
31.72438	52.24*	45.24	-7.00
32.62339	50.73*	45.36	-5.37
35.05387	49.37*	45.68	-3.69
38.42478	42.11	46.07	3.96
45.25782	44.92	46.79	1.87

Frequency MHz	AV Level dBpW	AV Limit dBpW	AV Delta dB
31.72438	40.24*	35.24	-5.00
32.62339	39.89*	35.36	-4.53
35.05387	37.42*	35.68	-1.74
38.42478	33.01	36.07	3.06
45.25782	36.40	36.79	0.39

\* limit exceeded