


EUT:
 Manuf:
 Op Cond:
 Operator:
 Test Spec:
 Comment:

Scan Settings (1 Range)			Receiver Settings					
Frequencies			IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	Step	120kHz	PK+AV	50msec	Auto	OFF	60dB
30MHz	300MHz	.1%						

Transducer	No.	Start	Stop	Name
	1	30MHz	300MHz	MDS21_C09_LOSS

Final Measurement: Detectors: X QP / + AV
 Meas Time: 2sec
 Peaks: 8
 Acc Margin: 25 dB

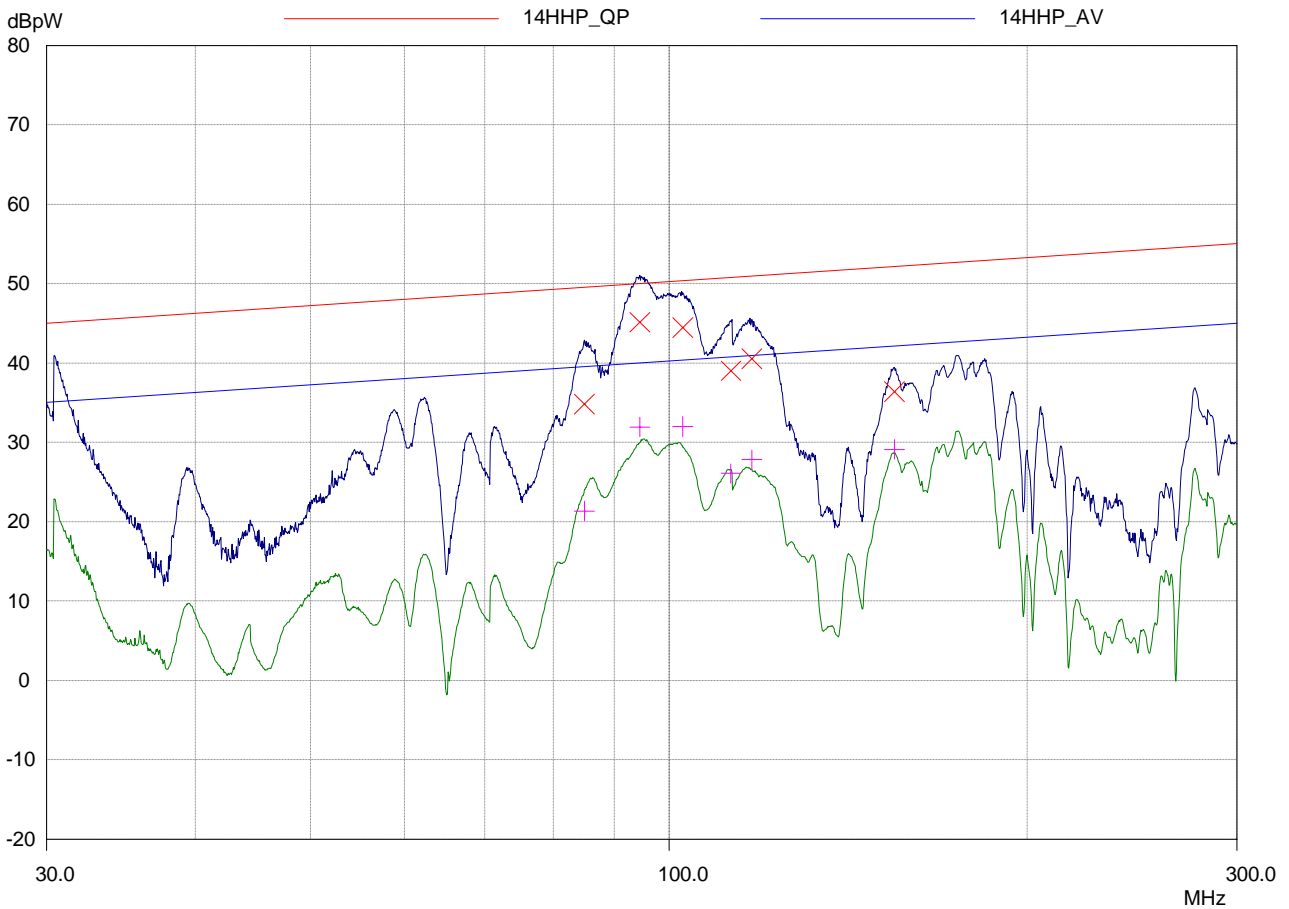

EUT:
 Manuf:
 Op Cond:
 Operator:
 Test Spec:
 Comment:

Scan Settings			(1 Range)		Receiver Settings				
Frequencies			IF BW	Detector	M-Time	Atten	Preamp	OpRge	
Start	Stop	Step	120kHz	PK+AV	50msec	Auto	OFF	60dB	
30MHz	300MHz	.1%							

Transducer	No.	Start	Stop	Name
	1	30MHz	300MHz	MDS21_C09_LOSS

Final Measurement: Detectors: X QP / + AV
 Meas Time: 2sec
 Peaks: 8
 Acc Margin: 25 dB

Final Measurement Results

Frequency MHz	QP Level dBpW	QP Limit dBpW	QP Delta dB
84.91724	34.79	49.52	14.73
94.50226	45.09	49.98	4.89
102.67639	44.43	50.34	5.91
112.67818	38.95	50.75	11.80
117.39159	40.50	50.93	10.43
154.68293	36.36	52.12	15.76

Frequency MHz	AV Level dBpW	AV Limit dBpW	AV Delta dB
84.91724	21.33	39.52	18.19
94.50226	31.89	39.98	8.09
102.67639	31.96	40.34	8.38
112.67818	26.07	40.75	14.68
117.39159	27.78	40.93	13.15
154.68293	29.09	42.12	13.03

* limit exceeded