


EUT:  
 Manuf:  
 Op Cond:  
 Operator:  
 Test Spec:  
 Comment:

Result File: I.dat : New Measurement

Scan Settings			(1 Range)		Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	0.8%	9kHz	PK+AV	50msec	Auto	OFF	60dB	

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	LISN_C02_LOSS

Final Measurement:      Detectors:      X QP / + AV  
 Meas Time:              1sec  
 Peaks:                    8  
 Acc Margin:              25 dB

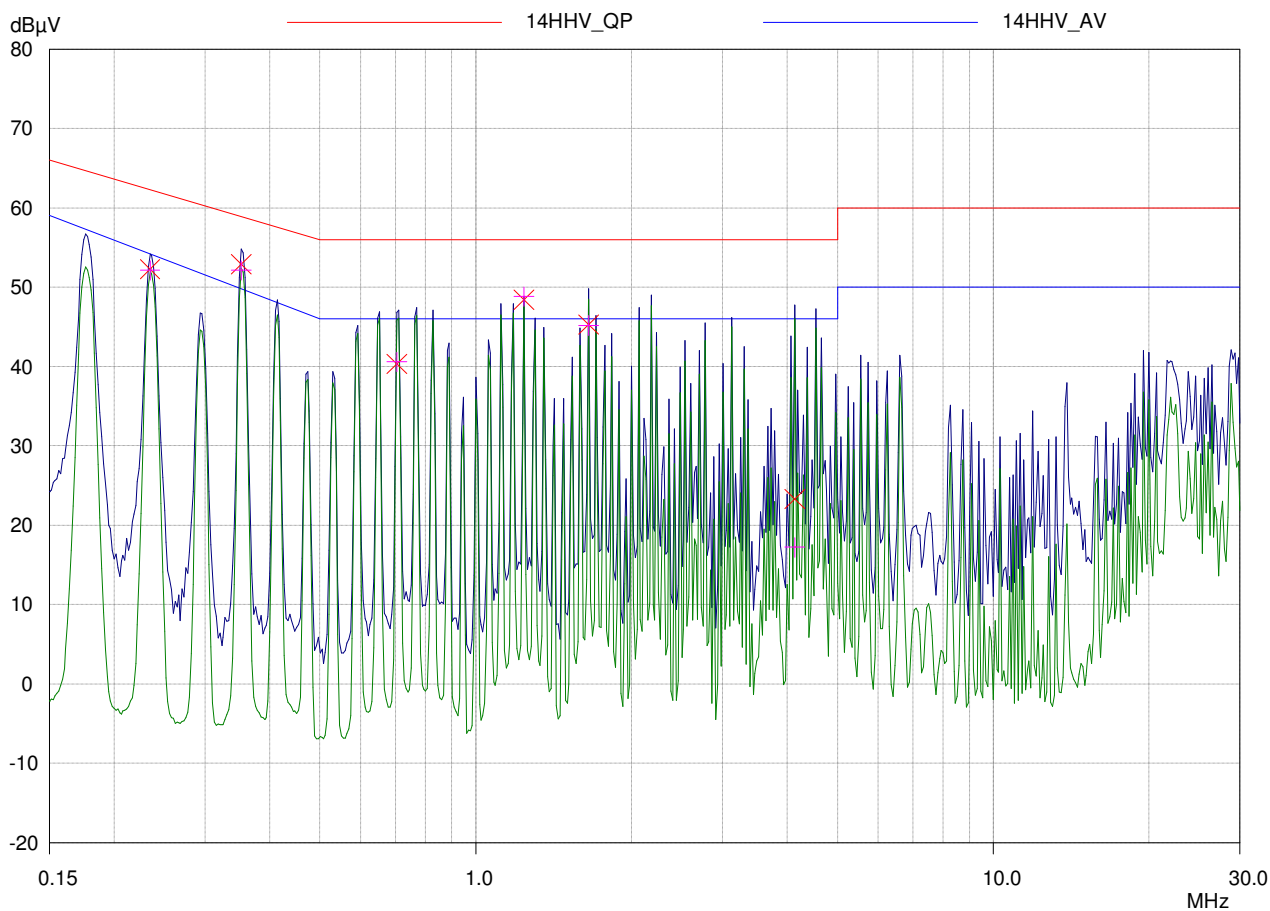

EUT:  
 Manuf:  
 Op Cond:  
 Operator:  
 Test Spec:  
 Comment:

Result File: I.dat : New Measurement

Scan Settings (1 Range)			Receiver Settings					
Frequencies			IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	Step	9kHz	PK+AV	50msec	Auto	OFF	60dB
150kHz	30MHz	0.8%						

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	LISN_C02_LOSS

Final Measurement:      Detectors:      X QP / + AV  
 Meas Time:              1sec  
 Peaks:                    8  
 Acc Margin:              25 dB

Final Measurement Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB
0.23435	52.24	62.29	10.05
0.35185	52.85	58.92	6.07
0.70377	40.31	56.00	15.69
1.23917	48.37	56.00	7.63
1.65086	45.27	56.00	10.73
4.12736	23.26	56.00	32.74

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.23435	52.11	54.18	2.07
0.35185	52.09*	49.79	-2.30
0.70377	40.57	46.00	5.43
1.23917	48.79*	46.00	-2.79
1.65086	45.13	46.00	0.87
4.12736	17.21	46.00	28.79

\* limit exceeded