


DESCRIPTION

The A705 is a low dropout current regulator rated for 210mA, 230mA, 250mA, 270mA, 290mA, 310mA, 330mA, and 350mA constant sink current. The low quiescent current and low dropout voltage are achieved by advanced Bi-CMOS process.

FEATURES

- 210/230/250/270/290/310/330/350mA ±10mA constant sink current.
- Output short / open circuit protection.
- Low dropout voltage.
- Low quiescent current.
- Supply voltage range 2.7V ~ 12V.
- 2KV HBM ESD protection.
- Advanced Bi-CMOS process.
- SOT-89 and TO-252 package available.
- Compatible with AMC7135.


TYPICAL APPLICATION CIRCUIT

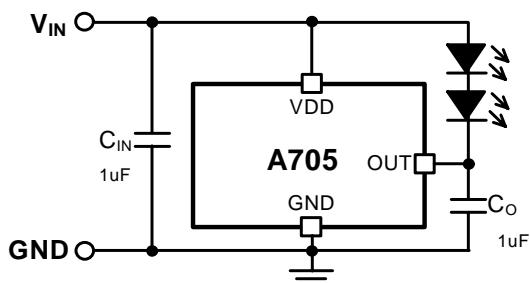

APPLICATIONS

- Power LED Driver
- LED Miner's Lamp

PACKAGE PIN OUT

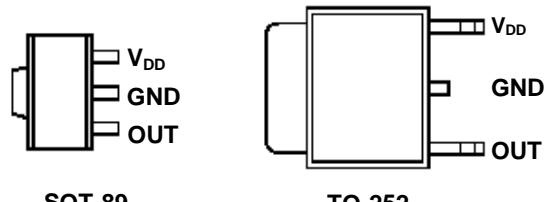

SOT-89

TO-252

(Top View)

ORDER INFORMATION (Note 1)

Output Current (Note 2)	N	SOT-89		S	TO-252	
		3-pin				3-pin
200mA ~ 220mA		A705NFT-210			A705SFT-210	
220mA ~ 240mA		A705NFT-230			A705SFT-230	
240mA ~ 260mA		A705NFT-250			A705SFT-250	
260mA ~ 280mA		A705NFT-270			A705SFT-270	
280mA ~ 300mA		A705NFT-290			A705SFT-290	
300mA ~ 320mA		A705NFT-310			A705SFT-310	
320mA ~ 340mA		A705NFT-330			A705SFT-330	
340mA ~ 360mA		A705NFT-350			A705SFT-350	


Note 1: The letter "F" is marked for Lead Free process, and letter "T" is marked for Tape & Reel.

2: For other output current ranking, please consult sales or FAEs.

ABSOLUTE MAXIMUM RATINGS (Note)

Input Voltage, V _{DD}	-0.3V to 13.2V
Output Voltage, V _{OUT}	-0.3V to 17V
Maximum Junction Temperature, T _J	150°C
Storage Temperature Range	-40°C to 150°C
Lead Temperature (Soldering, 10 seconds)	260°C

Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground.
 Currents are positive into, negative out of the specified terminal.

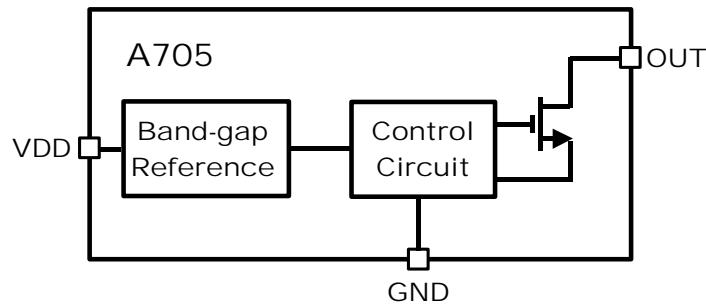BLOCK DIAGRAM

PIN DESCRIPTION

Pin Name	Pin Function
V _{DD}	Power supply.
OUT	Output pins. Connected to load.
GND	Ground.

THERMAL RESISTANCE

Package		θ _{JT} (°C /W)	Note: T _J = T _C + (P _D × θ _{JT}) θ _{JT} : Thermal Resistance - Junction to Tab. T _C : Case (Tab) Temperature. T _J : Junction Temperature. P _D : Power Consumption.
N	SOT-89	35	
S	TO-252	7	

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V _{DD}	2.7		12	V
Output Sink Current	I _{OUT}			360	mA
Operating Free-air Temperature Range	T _A	-40		+85	°C

DC ELECTRICAL CHARACTERISTICS


V_{DD}=3.7V, T_A=25°C, No Load (Unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Apply Pin
Output Sink Current	I _{OUT}	V _{OUT} =0.2V	A705P	200	210	220	mA OUT
			A705Q	220	230	240	
			A705R	240	250	260	
			A705S	260	270	280	
			A705T	280	290	300	
			A705V	300	310	320	
			A705W	320	330	340	
			A705X	340	350	360	
Load Regulation		V _{OUT} =0.2V to 3V			2	mA/V	
Line Regulation		V _{DD} = 3V to 12V, V _{OUT} =0.2V			2	mA/V	
Output Dropout Voltage ^(Note)	V _{OUTL}			120		mV	
Supply Current Consumption	I _{DD}			200		uA	VDD


Note: Output dropout voltage: 90% x I_{OUT} @ V_{OUT}=200mV

APPLICATION INFORMATION
Output Capacitor C_O and PCB layout:


The output capacitor C_O may be removed under certain condition. Please refer to the following figure. If LED and A705 is located in the same PCB, and the length of the routing path $L1 < 10\text{cm}$ & $L2 < 3\text{cm}$, the output capacitor C_O can be neglected. The number of LEDs in series could be 1 ~ 3, that the total V_F of the LED string is smaller 11V.

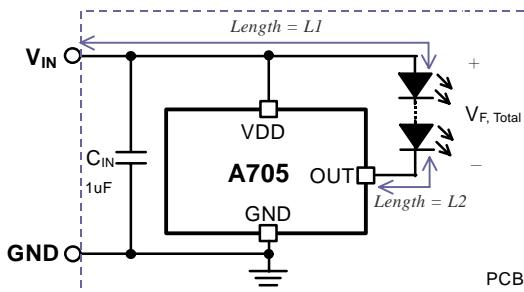

If LED and A705 is located in separate PCBs, or the length of the routing path $L1 > 10\text{cm}$ or $L2 > 3\text{cm}$, the output capacitor C_O should be added. Typically, capacitance of $0.1\mu\text{F} \sim 1\mu\text{F}$ is recommended and $1\mu\text{F}$ is needed when $L2$ is much longer than 3cm.

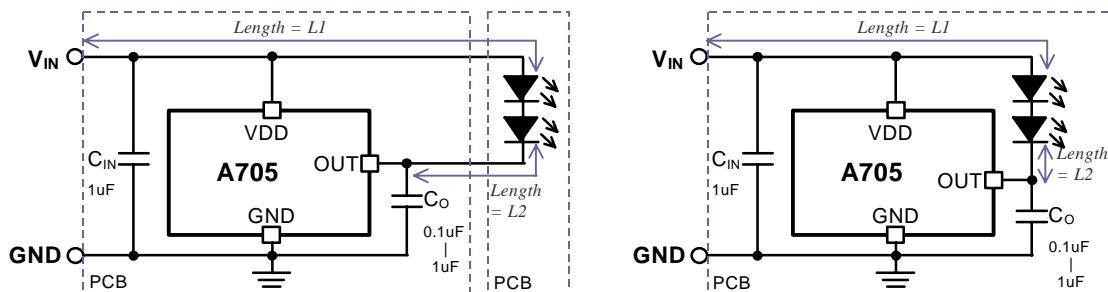

If four LEDs or more are connected in series to OUT pin, the supply voltage to VDD pin and LED+ end should be separated because the voltage level of V_{LED+} is higher than the voltage rating of VDD pin. The recommended application circuit is shown in the following figure.

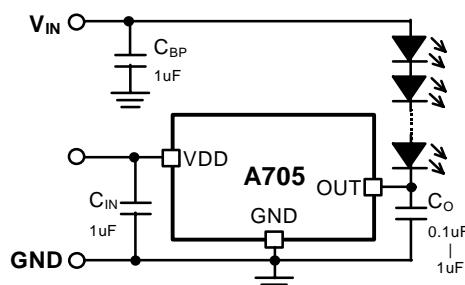

The Maximum Power Dissipation on Regulator:

$$P_{D(MAX)} = V_{OUT(MAX)} \times I_{OUT(NOM)} + V_{IN(MAX)} \times I_Q$$

$V_{OUT(MAX)}$ = the maximum voltage on output pin;

$I_{OUT(NOM)}$ = the nominal output current;

I_Q = the quiescent current the regulator consumes at $I_{OUT(MAX)}$;

$V_{IN(MAX)}$ = the maximum input voltage.

Thermal Consideration:

The maximum junction temperature ratings of A705 should not be exceeded under continuous normal load conditions. When power consumption is over about 700mW (SOT-89 package, at $T_A=70^\circ\text{C}$) or 1000mW (TO-252 package, at $T_A=70^\circ\text{C}$), additional heat sink is required to control the junction temperature below 120°C .

The junction temperature is:

$$T_J = P_D (\theta_{JT} + \theta_{CS} + \theta_{SA}) + T_A$$

P_D : Dissipated power.

θ_{JT} : Thermal resistance from the junction to the mounting tab of the package.

For SOT-89 package, $\theta_{JT} = 35.0^\circ\text{C}/\text{W}$. For TO-252 package, $\theta_{JT} = 7.0^\circ\text{C}/\text{W}$.


θ_{CS} : Thermal resistance through the interface between the IC and the surface on which it is mounted.
(typically, $\theta_{CS} < 1.0^\circ\text{C}/\text{W}$)

θ_{SA} : Thermal resistance from the mounting surface to ambient (thermal resistance of the heat sink).

If PC Board copper is going to be used as a heat sink, below table can be used to determine the appropriate size of copper foil required. For multi-layered PCB, these layers can also be used as a heat sink. They can be connected with several through-hole vias.


PCB θ_{SA} ($^\circ\text{C}/\text{W}$)	59	45	38	33	27	24	21
PCB heat sink size (mm^2)	500	1000	1500	2000	3000	4000	5000

Recommended figure of PCB area used as a heat sink.

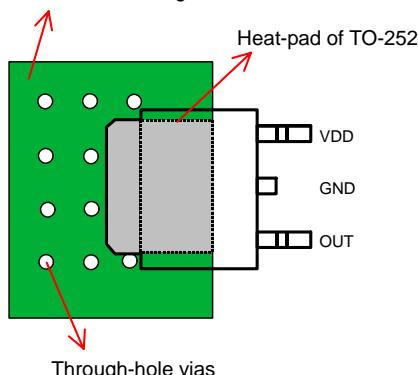

PACKAGE

Top Marking for SOT-89



: Output Current Options


P = 210mA; Q = 230mA; R = 250mA; S = 270mA; T = 290mA;
V = 310mA; W = 330mA; X = 350mA

Y : Year Code

WW : Week Code


V : Vendor Code

3-Pin Surface Mount SOT-89

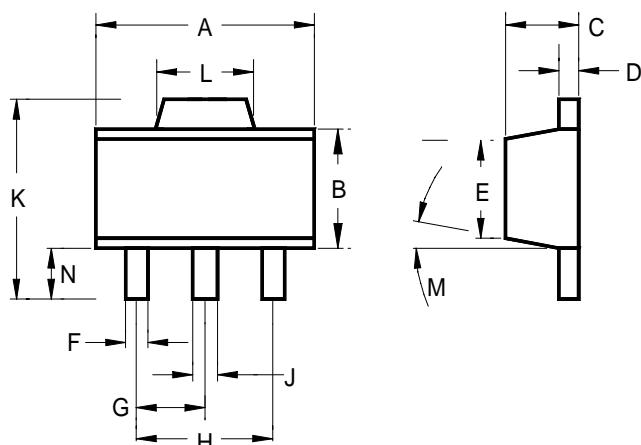

	INCHES			MILLIMETERS		
	MIN	TYP	MAX	MIN	TYP	MAX
A	0.173	-	0.181	4.39	-	4.59
B	0.090	-	0.102	2.28	-	2.59
C	0.055	-	0.063	1.39	-	1.60
D	0.015	-	0.017	0.38	-	0.43
E	0.084	-	0.090	2.13	-	2.28
F	0.016	-	0.019	0.33	-	0.48
G	0.059 BSC			1.49 BSC		
H	0.118 BSC			2.99 BSC		
J	0.018	-	0.022	0.45	-	0.55
K	0.155	-	0.167	3.94	-	4.24
L	0.067	-	0.072	1.70	-	1.82
M	0°	-	8°	0°	-	8°
N	0.035	-	0.047	0.89	-	1.19

Top Marking for TO-252



: Output Current Options

P = 210mA; Q = 230mA; R = 250mA; S = 270mA; T = 290mA;
V = 310mA; W = 330mA; X = 350mA



Y : Year Code

WW : Week Code

V : Vendor Code

LLLLL.L : Lot Number

3-Pin Surface Mount TO-252

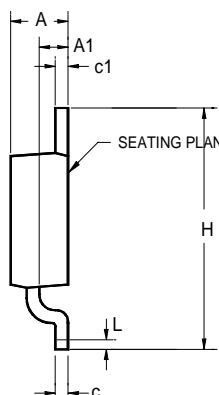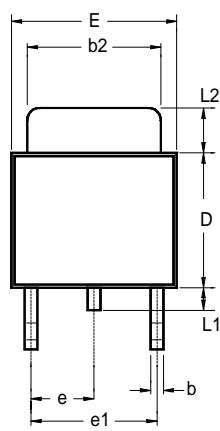

	INCHES			MILLIMETERS		
	MIN	TYP	MAX	MIN	TYP	MAX
A	0.086	-	0.094	2.18	-	2.39
A1	0.040	-	0.050	1.02	-	1.27
b	-	0.024	-	-	0.61	-
b2	0.205	-	0.215	5.21	-	5.46
c	0.018	-	0.023	0.46	-	0.58
c1	0.018	-	0.023	0.46	-	0.58
D	0.210	-	0.220	5.33	-	5.59
E	0.250	-	0.265	6.35	-	6.73
e	0.090 BSC			2.29 BSC		
e1	0.180 BSC			4.58 BSC		
H	0.370	-	0.410	9.40	-	10.41
L	0.020	-	-	0.51	-	-
L1	0.025	-	0.040	0.64	-	1.02
L2	0.060	-	0.080	1.52	-	2.03