


B	DWG NO	THIS DOCUMENT AND THE PARTS LIST THEREIN ARE UNCLASSIFIED UNLESS INDICATED OTHERWISE BY THE ISSUING OFFICE.		REV	DESCRIPTION	REVISION	DATE	APPROVED
		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.						

SCHEMATIC DIAGRAMS

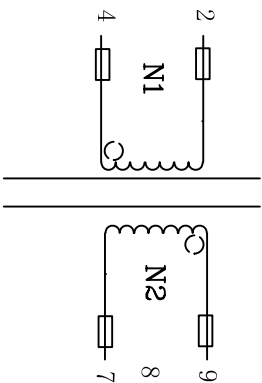

WINDING ORDER

PIN端	TOP端
	TAP
	3TS
	3TS
	3TS
	3TS
	3TS
	3TS
	BOBBIN

绕制事项:

- 1: PIN9-7的电感量为 $0.5\text{mH} \pm 5\%$, CORE用材质为PC40EI22-(5+5)pin立式
- 2: PIN 1 3 5 6 10需切去 pin8保留
- 3: 线圈均为居中密绕方式
- 4: CORE须研磨以达到感量要求为准, 研磨磁芯装顶部, CORE TAPE 3TS
- 6: 所有引出线加TEFLON TUBE, 成品外围需包2TS胶带, 标签: EI22-01
- 7: 产品真空含浸, 产品须符合环保要求 (打样 1 0 PCS)
- 8: 打高压: 3200V/5mA/60S

THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED	SIGNATURES	DATE	SCALE	TITLE
	DIMENSIONS ARE IN MM TOLERANCES ON: 1. PL DIMENSIONS ± 2. HOLE DIMENSIONS ± ANGLES ± FRACTIONS ±	DRAWN 设计			TRANSFORMER
		CHECKED 检查			MDA008A-0402
		ENGRS 设计			
		ISSUED		page 1	

SHENZHEN ELITE ELECTRONIC CO., LTD