

DATA SHEET

LOW VF SCHOTTKY RECTIFIER

VOLTAGE 45 Volts


CURRENT 10.0 Amperes

TO-277B

Unit:mm


FEATURES

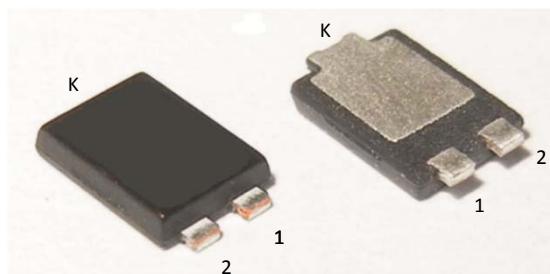- Low Forward Voltage Drop.
- Reliable High Temperature Operation
- Softest, fast switching capability.
- 150°C Operating Junction Temperature
- Plastic package has UL flammability classification 94V-0




MECHANICAL DATA

- Case: Molded Plastic TO-277B
- Polarity: Symbols molded or marked on body
- Mounting position : Any






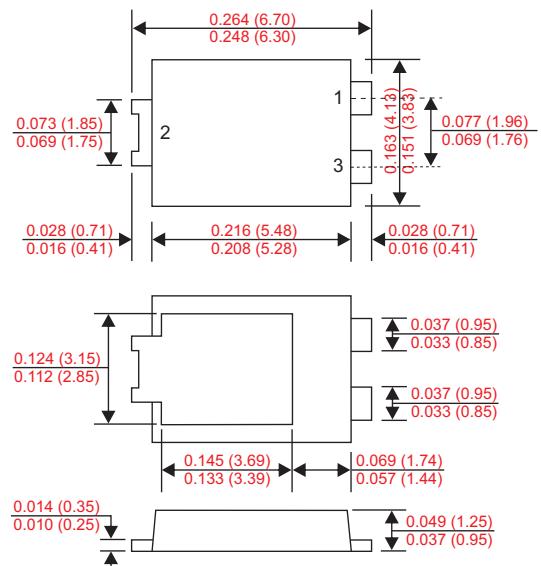
In compliance with EU RoHS 2002/95/EC directives



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Characteristic			Symbol	10U45	Unit
Peak Repetitive Reverse Voltage			VRRM		
Working Peak Reverse Voltage			VRWM	45	V
DC Blocking Voltage			VR		
Maximum RMS Voltage			VRMS	32	V
Forward Rectified Current		I (AV)		10	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz)		IFSM		275	A
Maximum forward voltage	IF=10A	T _J = 25°C	VF	0.47	V
		T _J = 125°C		0.45	
Maximum DC Reverse Current @TC=25°C			IR	0.5	mA
at Rated DC Blocking Voltage @TC=125°C				100	
Typical Thermal Resistance		R _{OJC}		60	°C/W
Operating Temperature Range		T _J		-55 to +150	°C
Storage Temperature Range		T _{STG}		-55 to +150	°C

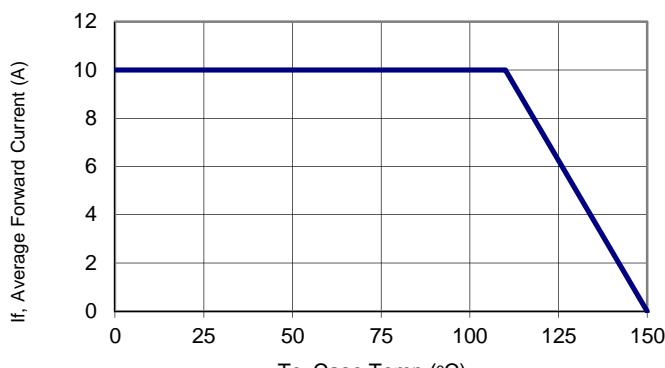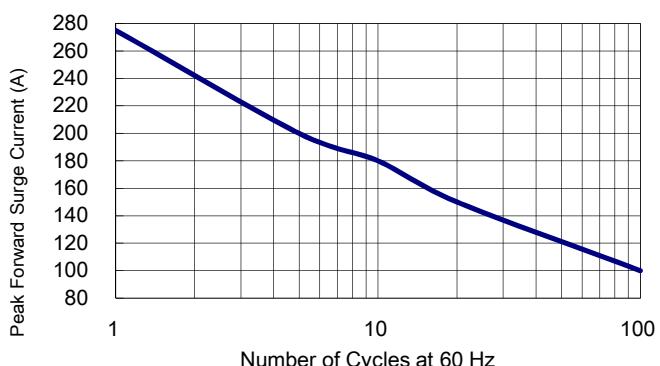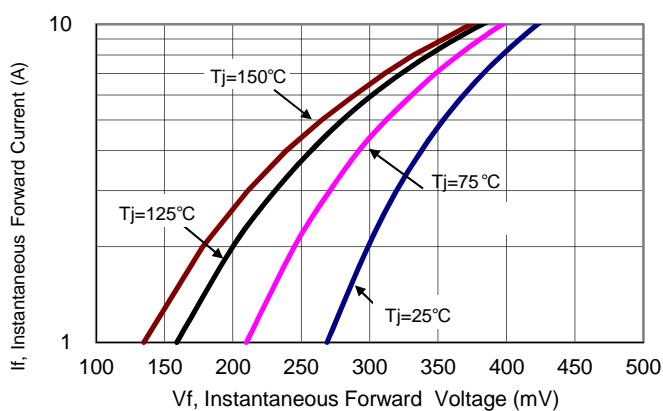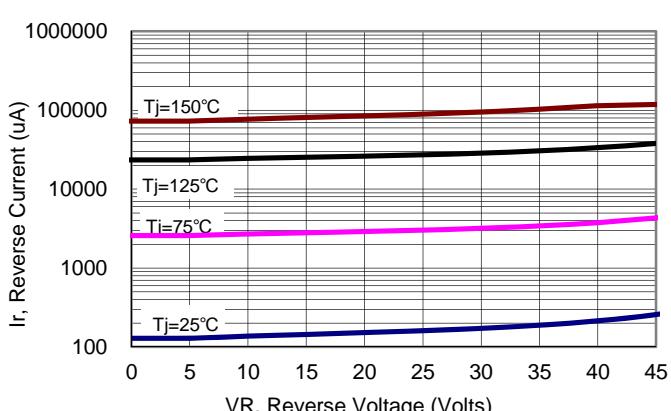
Figure 1: Current Derating, Case

Figure 2: Maximum Repetitive Surge Current

Figure 3: Typical Reverse Current

Figure 4: Typical Forward Voltage