


# Product Drawing and Specification

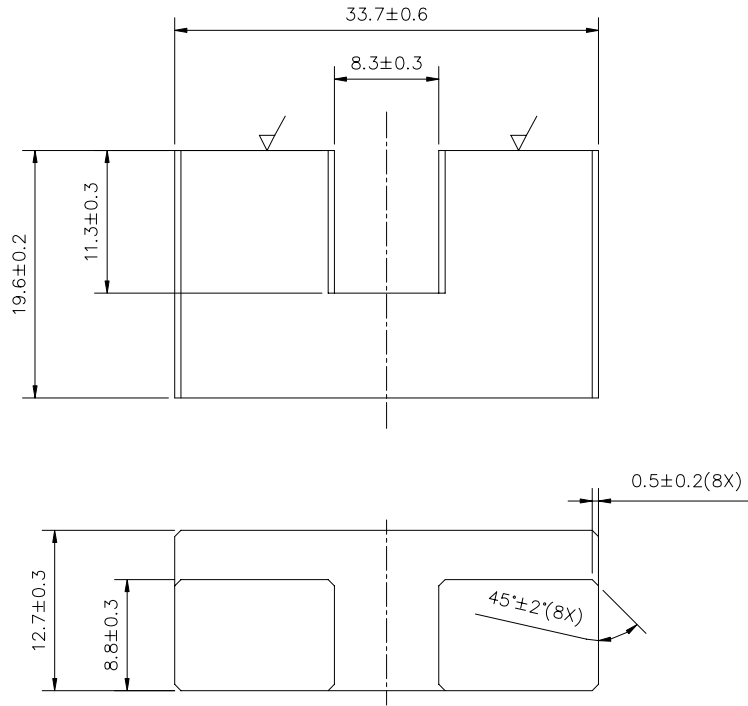

Magnetic dimensions according to IEC 205

Ae : 110mm <sup>2</sup>	Amin : 105.4mm <sup>2</sup>	Le : 94.8 mm	Ve : 10385 mm <sup>3</sup>	Weight~26.3 g
-------------------------	-----------------------------	--------------	----------------------------	---------------

## Electrical Specifications

Property	Specification	Unit	Test Conditions			
			Frequency (kHz)	Induction (mT)	Temperature (°C)	Field (A/m)
A <sub>L</sub>	3000±25%	nH/N <sup>2</sup>	10	≤0.1	25	----
B <sub>s</sub>	≥320	mT	25	----	100	250
P <sub>v</sub>	<1.1	W/Set	25	200	100	----
	<1.15		100	100	100	----

ROUGHNESS	UNIT	SCALE	PROJ	UN-D 28	TOLERANCES:	UN-D 603
	mm	2:1	EUROP	UN-D 28	UNLESS OTHERWISE STATED	
					DIMENSION:	
					ACC: TO DIN 406 TEIL 4	

3C90: MA01	CORE- FAMILY UF34/20/13-3C90	1	2005/6/18
6TG : 53 35 00			
2005/6/18		4341 020 1674_	
- -			

Name: Emily	Check: <i>Sel. Luo</i>	Approve: <i>Shi. Chang</i>	110 - 02	010	A 4
-------------	------------------------	----------------------------	----------	-----	-----

TR	Dat. 2005/6/18	Property of Ferroxcube Dongguan Ltd.-China			
----	----------------	--	--	--	--

Revision:001

No.:FXC-F-0168

All rights strictly reserved. Reproduction or issue to third parties in any form is not permitted without written consent of the proprietor.