



## Major ratings and characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular Waveform	3	A
$V_{RRM}$	300	V
$V_F @ 3 A, T_J=125^\circ C$	0.79	V, typ.
$T_J$ Operating Junction Temperature	-65 to +175	$^\circ C$

## DO-214AA( SMB )



## Features

- \* Low Forward Voltage Drop
- \* Reliable High Temperature Operation
- \* Softest, fast switching capability
- \* 175 $^\circ C$  Operating Junction Temperature
- \* Lead Free Finish, RoHS Compliant

## Typical Applications

Device optimized for ultra-low forward voltage drop to maximize efficiency in Power Supply applications

## Mechanical

- \* Case: DO-214AA( SMB )
- \* Molder Plastic: UL Flammability Classification Rating 94V-0
- \* Device Weight : 0.003 ounces (0.093grams)



## Maximum Ratings Characteristics ( $T_A = 25^\circ C$ unless otherwise specified )

Parameter	Symbol	Values	Units
DC Blocking Voltage	$V_{RM}$	300	Volts
Working Peak Reverse Voltage	$V_{RWM}$		
Peak Repetitive Reverse Voltage	$V_{RRM}$		
Average Rectified Forward Current (Rated VR-20Khz Square Wave) - 50% duty cycle	$I_o$	3	Amps
Peak Forward Surge Current - 1/2 60hz	$I_{FSM}$	50	Amps
Peak Repetitive Reverse Surge Current (2uS-1Khz)	$I_{RRM}$	1	Amps
Typical Thermal Resistance	$R\theta_{JL}$	20	$^\circ C / W$
Maximum Rate of Voltage Change ( at Rated $V_R$ )	dv/dt	10000	V/uS
Operating Junction Temperature	$T_J$	- 65 to +175	$^\circ C$
Storage Junction Temperature	$T_{STG}$	- 65 to +175	



## Electrical Characteristics - (per leg) ( $T_A = 25^\circ\text{C}$ unless otherwise specified )

Parameter	Test Conditions	Symbol	Typ.	Max.	Units
Instantaneous Forward Voltage	IF = 3 A	$T_J = 25^\circ\text{C}$	----	0.92	Volts
			$T_J = 125^\circ\text{C}$	0.79	
Instantaneous Reverse Current	At $V_{RM}$	$T_J = 25^\circ\text{C}$	----	100	$\mu\text{A}$
			$T_J = 125^\circ\text{C}$	----	20

\* Pulse width < 300  $\mu\text{s}$ , Duty cycle < 2%

## Patings and Characteristics Curves ( $T_A = 25^\circ\text{C}$ unless otherwise specified )

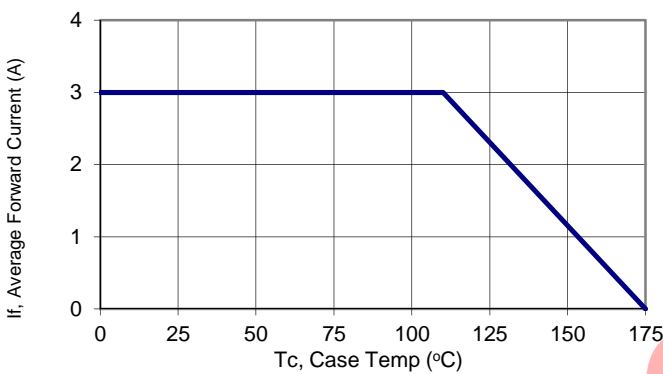


Figure 1: Current Derating, Case

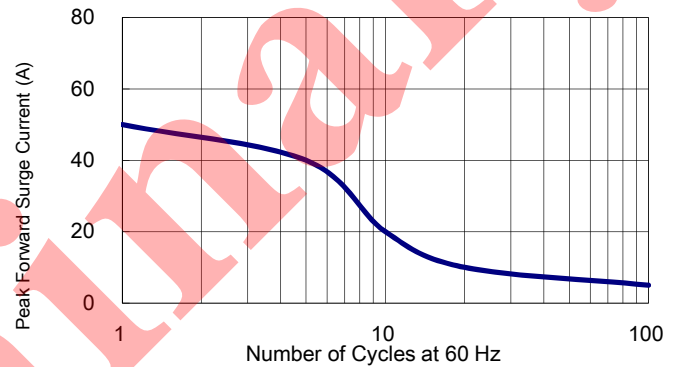


Figure 2: Maximum Repetitive Surge Current

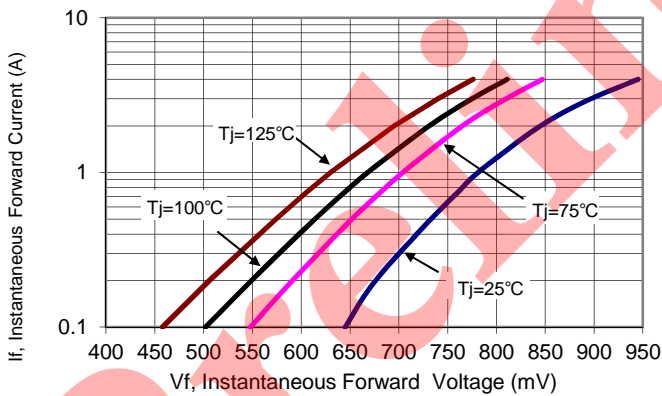


Figure 3: Typical Reverse Current

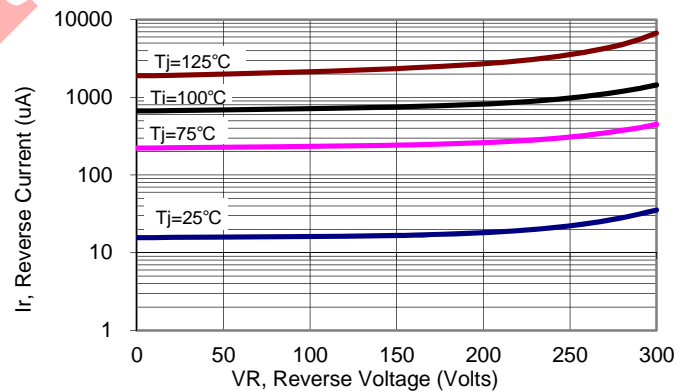


Figure 4: Typical Forward Voltage


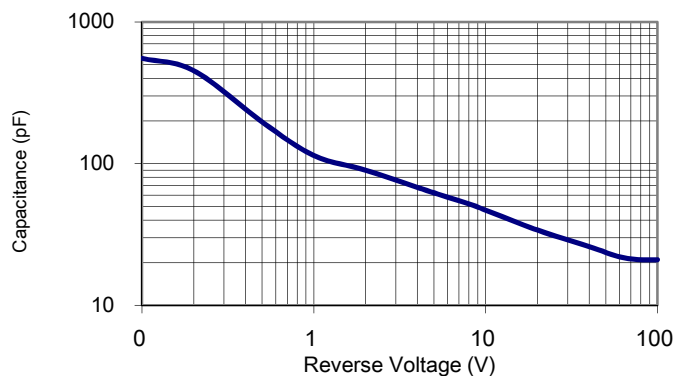



Figure 5: Typical Junction Capacitance




**Package and Suggested Mounting pad Outline Dimensions millimeters**

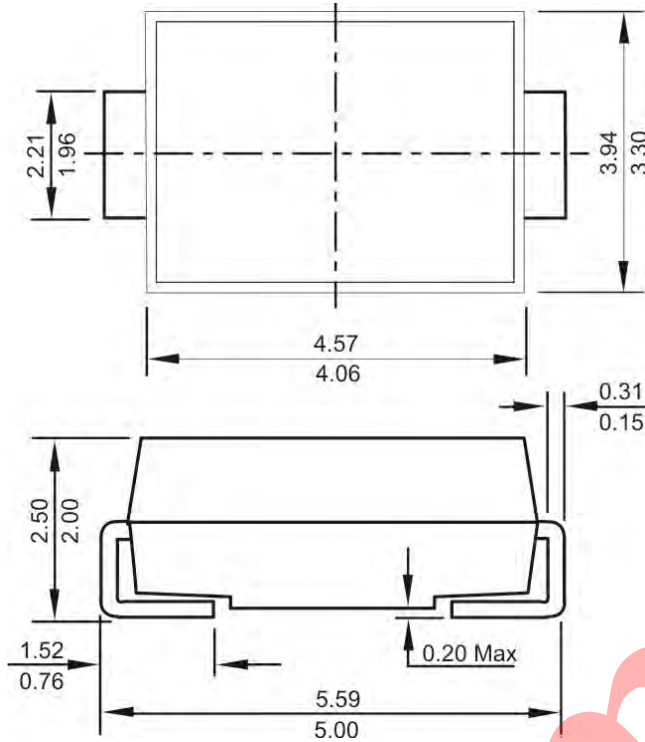

**Mounting Pad Layout**

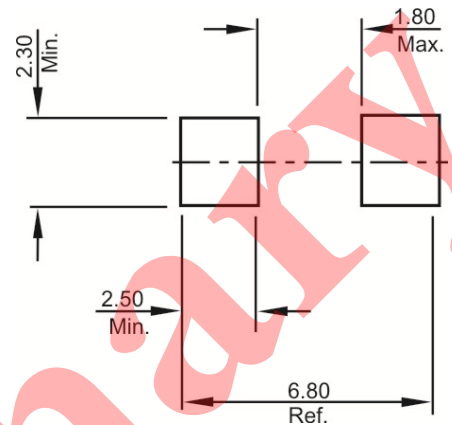

**Packing and Ordering information**

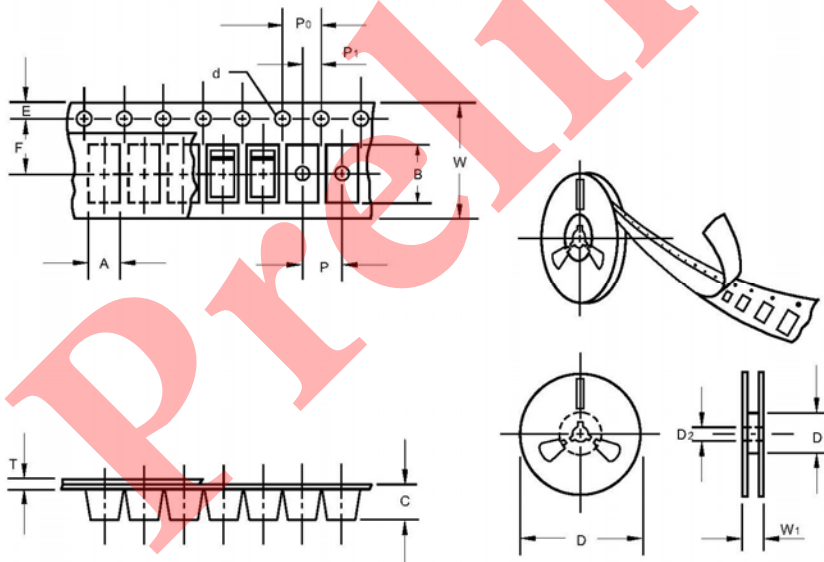

Item	Symbol	Dimension
Carrier width	A	3.77±0.10
Carrier length	B	5.7±0.10
Carrier depth	C	2.45±0.10
Sprocket hole	d	1.55±0.10
Reel outside diameter	D	330.0±1.0
Reel inner diameter	D1	75±1.0
Feed hole diameter	D2	13.5±1.0
Stocket hole position	E	1.75±0.10
Punch hole position	F	5.5±0.05
Punch hole pitch	P	8.0±0.10
Sprocket hole pitch	P0	4.0±0.10
Embossment center	P1	2.0±0.10
Total tape thickness	T	0.25±0.10
Tape width	W	12.0±0.15
Reel width	W1	18.1±1.5

**Ordering information**

Part Number	Package	Base Quantity	Delivery mode
P3L300B	DO-214AA ( SMB )	3000	13" diameter plastic tape and reel

Note: For Halogen Free molding compound, add "H" suffix to part number above.



## Marking information

P3L300B  
AYMH

P3L300B = Product Type Marking Code

A = Assembly code

YM = Date Code

Y = Last one digits of year

M = Month Code

H = Halogen Free (N/A = common molding compound)

Preliminary