


Model : 20W
 Serial :
 Operator :
 AC Power : 230V 50Hz
 Temp,Humidity : 22C 57%

Standard : EN55015
 Remark1 :
 Remark2 :
 Remark3 :
 Remark4 :

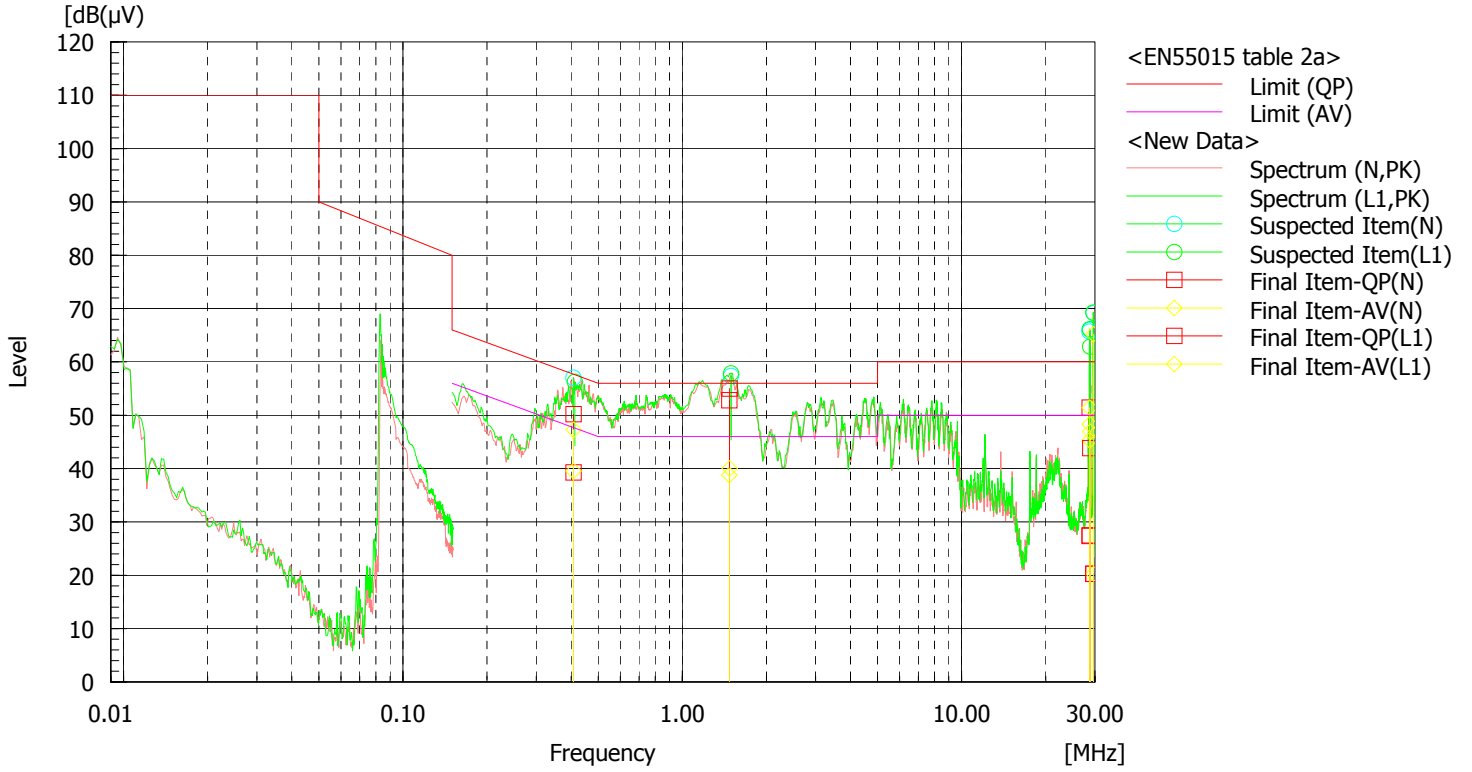

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.40834	39.9	37.0	10.3	50.2	47.3	57.7	47.7	7.5	0.4
2	1.47307	42.5	28.5	10.3	52.8	38.8	56.0	46.0	3.2	7.2
3	28.7171	17.1	34.9	10.4	27.5	45.3	60.0	50.0	32.5	4.7
4	28.73782	17.0	37.9	10.4	27.4	48.3	60.0	50.0	32.6	1.7
5	29.63455	9.8	9.9	10.4	20.2	20.3	60.0	50.0	39.8	29.7

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.40798	29.0	29.3	10.3	39.3	39.6	57.7	47.7	18.4	8.1
2	1.47749	44.7	29.7	10.3	55.0	40.0	56.0	46.0	1.0	6.0
3	28.71073	41.0	41.0	10.4	51.4	51.4	60.0	50.0	8.6	-1.4
4	28.87018	33.4	36.5	10.4	43.8	46.9	60.0	50.0	16.2	3.1
5	29.60436	9.9	54.8	10.4	20.3	65.2	60.0	50.0	39.7	-15.2