


Conducted Emission Measurement

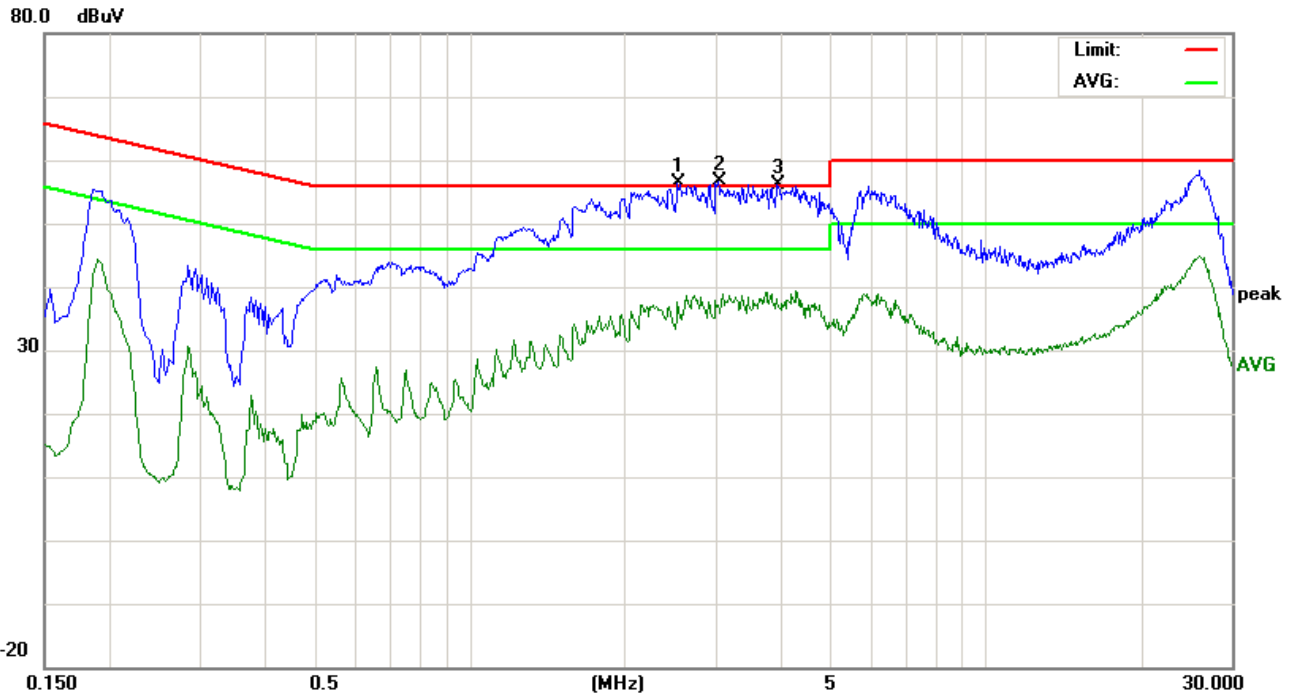

Site 843 Shielded Room

Phase: **L1**

Temperature: 26

Limit: AS/NZS CISPR15 Conduction(QP)

Power: AC 240V/50Hz

Humidity: 60 %

EUT: LED POWER

M/N:

Mode: Full Load

Note: +224

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2.5300	45.74	10.54	56.28	56.00	0.28	peak	
2	*	3.0260	45.98	10.55	56.53	56.00	0.53	peak	
3	X	3.9460	45.54	10.57	56.11	56.00	0.11	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only