


CONDUCTED EMISSION STANDARD EN 55015

EUT: Led M/N:
 Manufacturer: N
 Operating Condition: Full Load
 Test Site: 1#Shielding Room
 Operator: Kevin
 Test Specification: L 230V/50Hz
 Comment: Report No.:
 Start of Test: 3/19/2012 / 10:30:02AM

SCAN TABLE: "V 9K-30MHz fin"

Short Description:		_SUB_STD_VTERM2 1.70					
Start	Stop	Step	Detector	Meas. Time	IF	Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz		NSLK8126 2008
			Average				
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz		NSLK8126 2008
			Average				

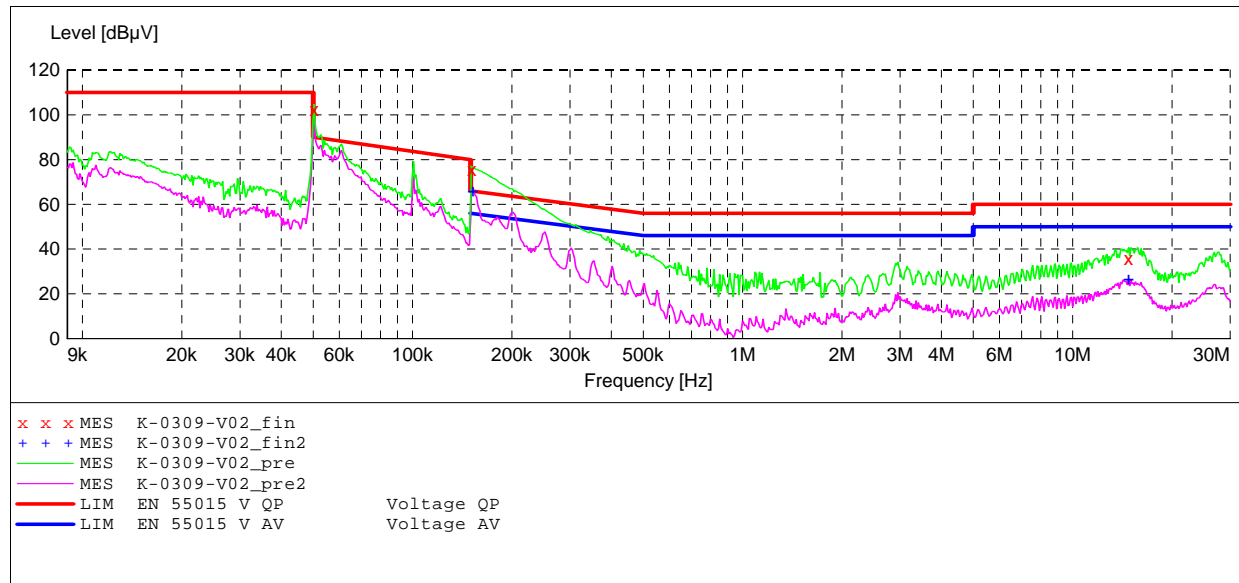

MEASUREMENT RESULT: "K-0309-V02_fin"

3/19/2012 10:33AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.050317	102.10	11.0	90	-12.2	QP	L1	GND
0.151200	75.50	11.0	66	-9.6	QP	L1	GND
14.769227	35.90	11.2	60	24.1	QP	L1	GND

MEASUREMENT RESULT: "K-0309-V02_fin2"

3/19/2012 10:33AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.152410	65.90	11.0	56	-10.0	AV	L1	GND
14.769227	26.70	11.2	50	23.3	AV	L1	GND