


- 1) 骨架：EFD15 (5+5) 脚式 磁芯：EFD15
- 2) 绕线应排列紧密整齐有序，绕完一个绕组后包一层玛拉胶带绝缘，漆包线绕组起头和收尾套铁氟龙套管。
- 3) $L(1-2) = 0.9\text{mH}$ ，磨磁芯中柱开气隙，误差5%。
- 4) 电感原理图以及骨架引脚俯视图如下：

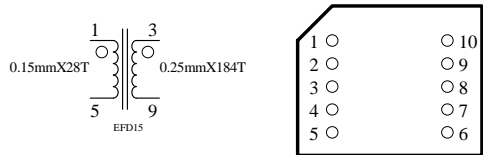

Title		
Size	Number	Revision
B		
Date:	10-Nov-2011	Sheet of
File:	C:\Documents and Settings\Administrator\Documents	File: D:\Documents and Settings\Administrator\Documents\101109.dtb