



Data: 1 File: E:\REPORT DATA\SI\ShengChang\STE120824158.EM6 (2)

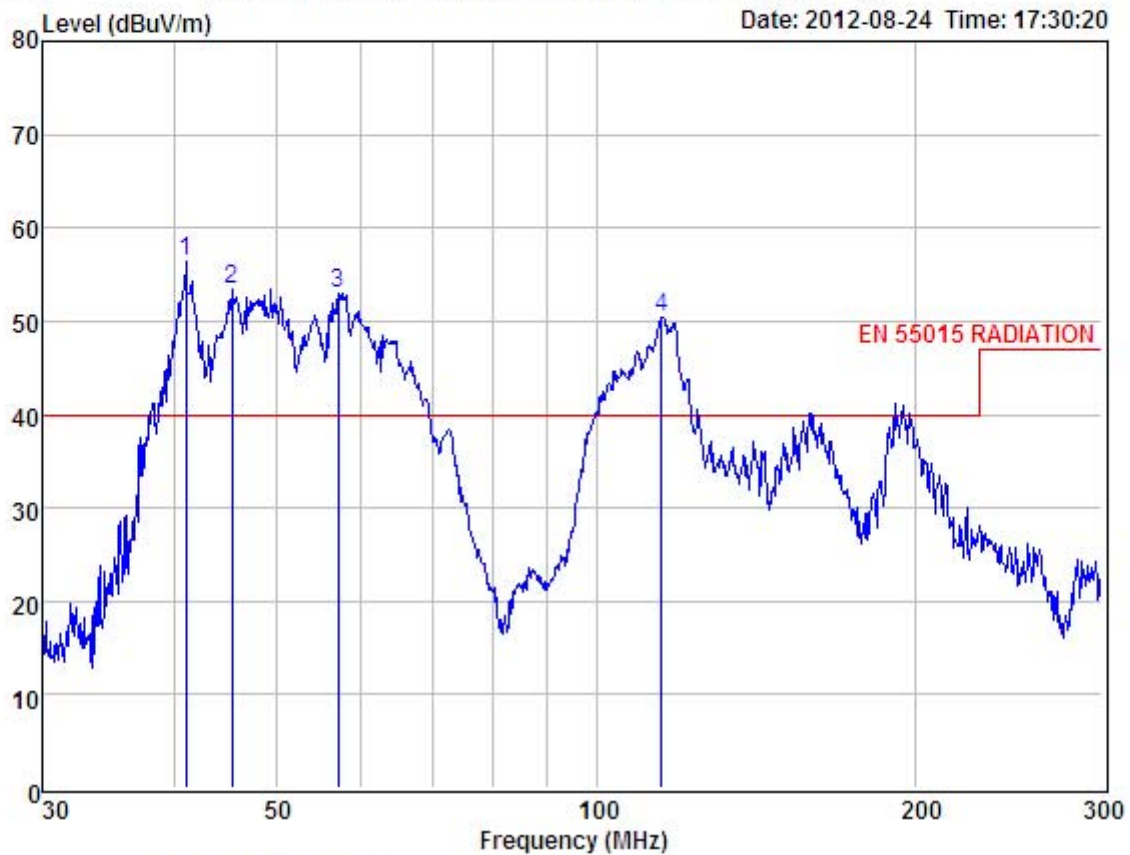

Condition : EN 55015 RADIATION 3m POL: VERTICAL
 EUT : LED POWER SUPPLY
 Model No : KI-301100-A-DIM
 Test Mode : ON
 Power : AC 230V/50Hz
 Test Engineer : Adam
 Remark :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Lose dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	41.03	69.76	13.93	27.81	0.55	56.43	40.00	16.43	Peak
2	45.30	67.02	13.65	27.82	0.58	53.43	40.00	13.43	Peak
3	57.03	67.29	12.91	27.86	0.64	52.98	40.00	12.98	Peak
4	115.38	64.74	11.68	26.87	0.95	50.50	40.00	10.50	Peak

Data: 2 File: E:\REPORT DATA\SI\ShengChang\STE120824158.EM6 (2)

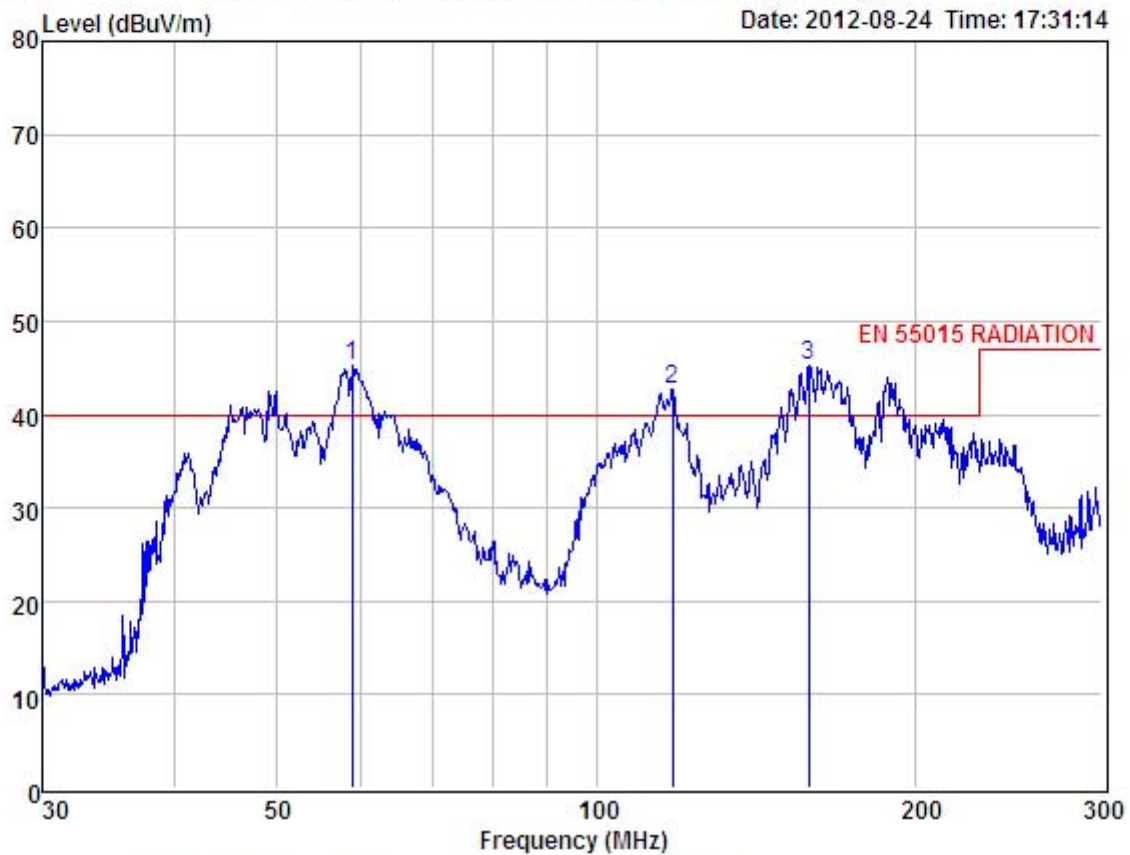

Condition : EN 55015 RADIATION 3m POL: HORIZONTAL
 EUT : LED POWER SUPPLY
 Model No : KI-301100-A-DIM
 Test Mode : ON
 Power : AC 230V/50Hz
 Test Engineer : Adam
 Remark :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	58.90	59.69	12.75	27.87	0.65	45.22	40.00	5.22	Peak
2	118.07	56.53	12.06	26.88	0.96	42.67	40.00	2.67	Peak
3	158.90	56.84	14.14	26.91	1.18	45.25	40.00	5.25	Peak