


UOB-100W-PF



输入电压	220V/50Hz
输出电压/电流	36V/1.5A-3A
PF	>0.99
效率	>0.85
外壳尺寸	L200*W70*H43MM

UOB-100W

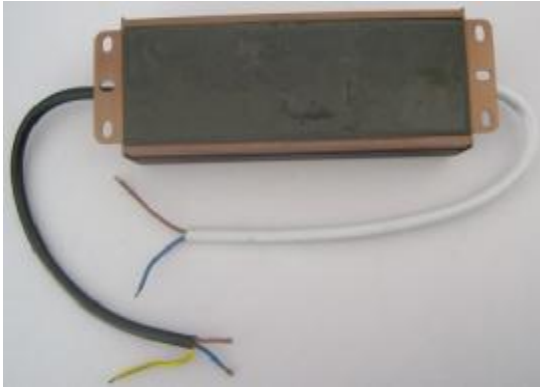

输入电压	220V/50Hz
输出电压/电流	36V/1.5A-3A
PF	>0.60
外壳尺寸	L137*W82*H40
裸板尺寸	L102* W68* H41mm
效率	>0.87

调光方式：配合 UOB-SEND 调光器，无需布信号线

特点：亮度从 1%-100%全范围可调，亮度保持一致无闪烁，适合量产