





深圳艾崴光电子有限公司  
 深圳龙华民治横岭一区50栋  
 Tel: 13510569907 0755-36894545  
 Email: info@ivylighting.com  
 Web: www.ivylighting.com

Ivylighting

# 规格书 / SPECIFICATION

## 110V/220V AC LED

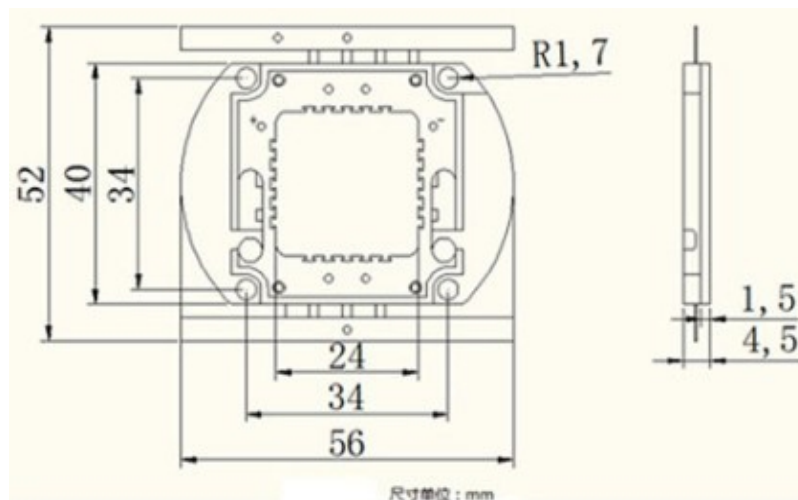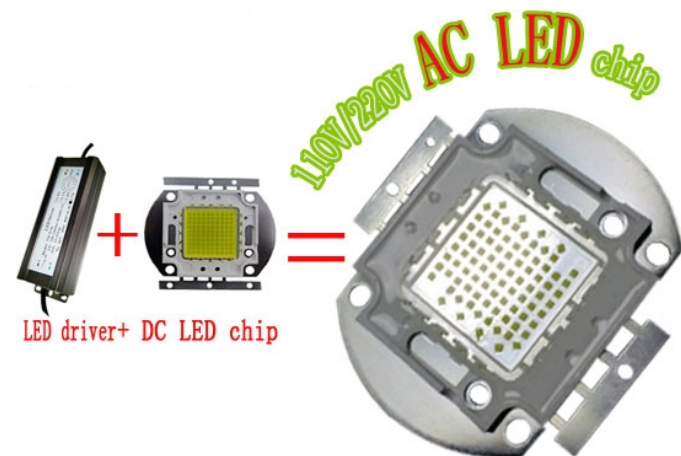

### ENVIRONMENTAL

- Operating temperature: -30 to 50°C
- Storage temperature: -40 to 85°C
- Humidity: 5% to 95%
- Cooling Convention
- Leakage current: <0.75mA @120V AC
- Ripple noise: 5% typical
- Vibration Frequency: 5 to 50 Hz
- MTBF: >30,000 Hours at full load and 25°C ambient conditions

▪ 电器规格: 50W 80W 100W 120W 150W 180W 200W

- PF>90
- 高演色度>90
- 接点温度3°C/W
- 轻松实现130 lm/w 的AC 模块
- 应用范围: 天井灯、户外灯、路灯
- 宽广的单电压适用范围: 110V-160V 220V-260V
- 宽广的电流特性: 100mA-400mA
- 无须电容、电阻及电源供应器, 减少零件的可变因素
- 色温范围: 3000K-7000K 可选择
- 温度减少: 30% (100W的模块只需70W的散热器, 便可轻松维持在70°C以内)
- 本模块可选择发光角度: 60度 90度 120度
- 本模块依客户需求, 可客制化条件制作