


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
02	RELEASED PER ECO 2321	JC 1/15/91	BJR
03	REDRAWN AND REVISED PER E980221	PEI 7/2/98	DPK

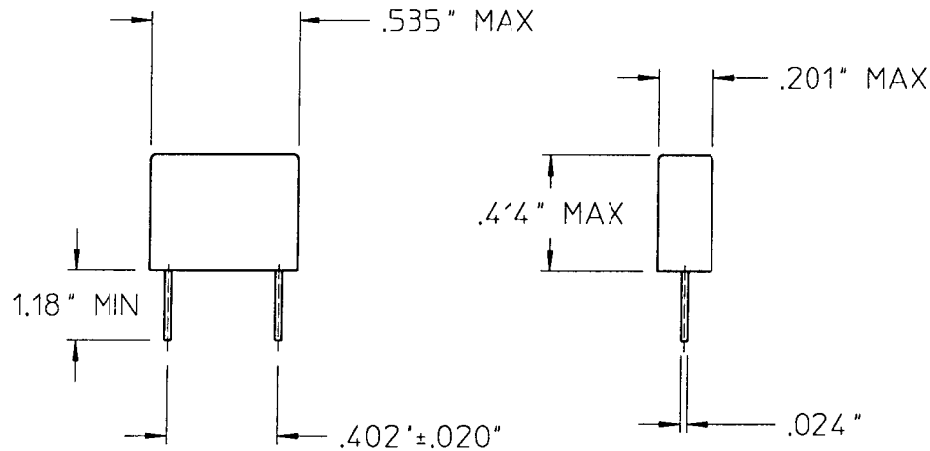

**ORIGINAL
ONLY WHEN STAMPED
IN RED**

ELECTRICAL SPECIFICATIONS	
RATED VOLTAGE	250 VAC
CAPACITANCE	4700 pF
CAPACITANCE TOLERANCE	±20%
CLASS	Y CLASS
DISSIPATION FACTOR	1.3% @ 1kHz
DIELECTRIC VOLTAGE	2700 VDC
INSULATION RESISTANCE @ 500VDC	≥ 12000MΩ
RECOMMENDED VOLTAGE IN DC APPLICATION	≥ 1000 VDC
TEMPERATURE RANGE	-40 TO +85°C

NOTES:

- APPROVALS INCLUDE SEMKO, NEMKO, DEMKCO, EI, VDE, SEV, OVE, IMQ, UL, CSA.

COPY



**CAPACITOR - (Y)
4700 pF ±20%, 250 VAC**

DRAWN BY	DATE	VICOR	
	7/2/98		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES +1/64 .XX- .01 .1° .XXX- .005			
THIRD ANGLE PROJECTION		SIZE	FSCM NO.
		B	67131
DO NOT SCALE DRAWING		DWG NO	REV
		01000	03
SCALE 2:1		SHEET 1 OF 1	