


**SHENZHEN HUATONGWEI INTERNATIONAL INSPECTION CO., LTD**

**RADIATED EMISSION FCC PART 15 B**

EUT: PSQ480E-2F  
 Manufacturer: DATAWELL  
 Operating Condition: FULL LOAD  
 Test Site: 3M CHAMBER  
 Operator: NADA  
 Test Specification: AC 110V/60Hz  
 Comment: Polarization: H  
 Start of Test: 9/25/06 / 4:06:41PM

**SWEEP TABLE: "test (30M-1G)"**

Short Description:	Field Strength
Start Stop Detector Meas. IF Transducer	
Frequency Frequency MaxPeak Time Bandw.	
30.0 MHz 1.0 GHz	HL562new

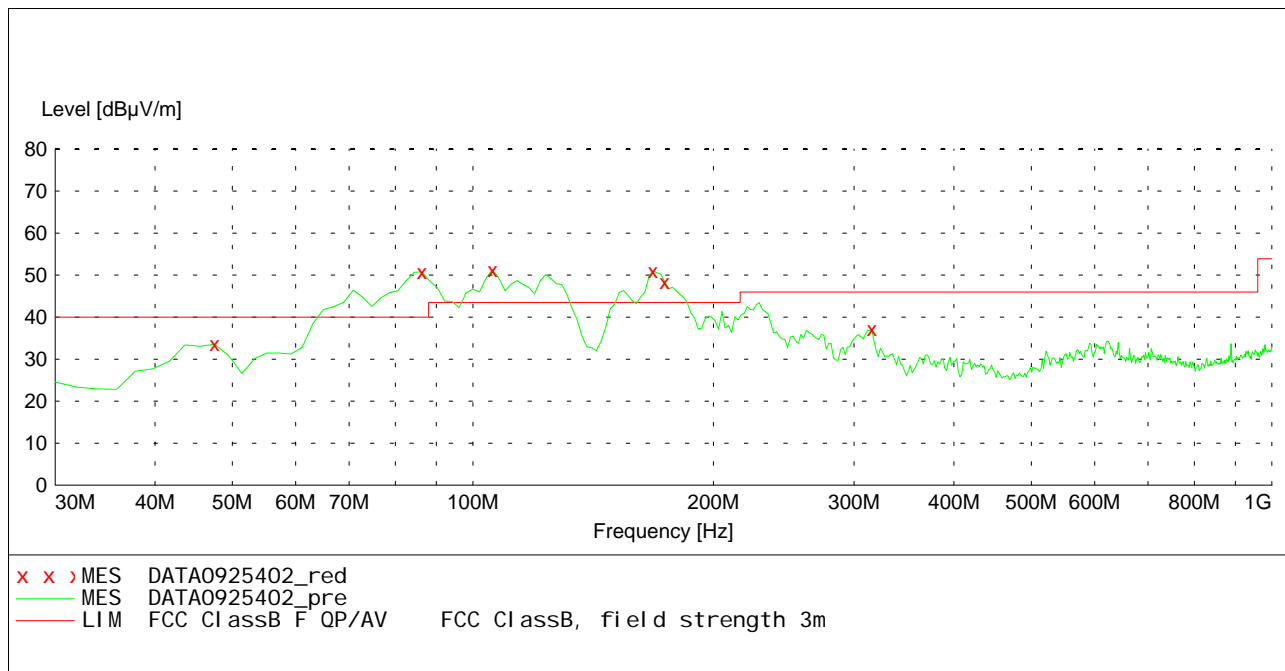

**MEASUREMENT RESULT: "DATA0925402\_red"**

9/25/06 4:09PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.494990	33.60	11.1	40.0	6.4	---	300.0	14.00	HORIZONTAL
86.372745	50.70	11.8	40.0	-10.7	---	300.0	209.00	HORIZONTAL
105.811623	51.30	11.8	43.5	-7.8	---	300.0	209.00	HORIZONTAL
168.016032	51.00	10.7	43.5	-7.5	---	100.0	156.00	HORIZONTAL
173.847695	48.50	10.7	43.5	-5.0	---	300.0	113.00	HORIZONTAL
315.751503	37.10	15.1	46.0	8.9	---	100.0	59.00	HORIZONTAL